



PRODUCT GUIDE

Intelligent Networking Infrastructure Solutions for the AI Era



Contents



01 Network Management

- 2 PLANET CloudNMS Platform
- 3 NMS Series Controller
- 4 Centralized Management Controller
- 5 Intelligent Renewable Energy Management Controller

06 LAN Switches

- 8 Build a High Computing Power Data Center
- 9 Layer 3 Managed Chassis Switches
- 10 10G/40G/100G Fiber Managed Switches
- 11 Layer 3 Enterprise Stackable Managed Switches
- 12 10G Layer 3 Managed Gigabit Switches
- 12 Layer 3/2+ IPv6 Managed Metro Switches
- 13 10G Layer 3 IPv6 Managed Gigabit Switches
- 13 Multigigabit L3 IPv6 Managed PoE Switches
- 14 Touch LCD 10G Layer 3 IPv6 Managed Gigabit Switches
- 14 Layer 2+ IPv6 Managed Gigabit Switches
- 15 Layer 2/4 IPv4/IPv6 Managed Gigabit Switches
- 16 Professional AV-over-IP Managed Switch
- 17 Web Smart Ethernet Switch
- 17 Layer 2 Unmanaged Gigabit Switches
- 17 Layer 2 Unmanaged Fast Ethernet Switches

18 Industrial Ethernet

- 20 Layer 3 and Layer 2 Industrial Managed Gigabit Switches
- 22 Layer 2 Industrial Gigabit Switches
- 23 Layer 2 Industrial Fast Ethernet Switches
- 23 Layer 3 and Layer 2 Industrial Managed Gigabit PoE Switches
- 26 Layer 2 Industrial PoE Switches/Extenders
- 27 EN50155 ITS Ethernet Network Solution
- 28 Layer 3 and Layer 2 Industrial Flat-type Ethernet Switches
- 29 Renewable Energy PoE Switches & Management Controller Series
- 30 Industrial PoE Injectors & Splitters
- 31 Industrial PoE Media Converters
- 31 Industrial Fiber over Ethernet Media Converters
- 31 Industrial 10GBASE-X Fiber over Ethernet Media Converters
- 32 Industrial 1000BASE-X Fiber over Ethernet Media Converters
- 32 Industrial 100BASE-FX Fiber over Ethernet Media Converters
- 33 Industrial Cellular Gateway
- 34 Vehicle 4G LTE Cellular Wireless Gateway
- 34 DIN-rail Power Supplies

35 Industrial Automation

- 37 Industrial RS232/RS485/RS422 over Ethernet Media Converters
- 37 HaLow RS232/RS485/DI/DO Node Controller
- 38 Industrial RS422/RS485 Modbus Gateway
- 38 Industrial EtherCAT Slave IO Module

39 Comprehensive AIoT Solution

- 40 AIoT Application Server
- 40 Industrial LoRaWAN Gateway for 300 Nodes
- 41 LoRa Node Controller
- 41 LoRa Sensor
- 42 HaLow Wi-Fi Bridge and Station Controller

43 Power over Ethernet

- 47 Layer 3 802.3at PoE+ Stackable Managed Switch
- 48 Touch LCD 10G Layer 3 802.3at/bt PoE Managed Gigabit Switches
- 48 Extractive Power Supply Design to Increase Flexibility
- 49 10G L3 802.3bt PoE++ Managed Gigabit Switches
- 49 10G L3 802.3at/802.3bt Managed Multigigabit Switches
- 50 10G L3 802.3at PoE+ Managed Gigabit Switches
- 50 L2+ 802.3at/802.3bt PoE Managed Gigabit Switches
- 51 L2/L4 802.3at/bt PoE Managed Gigabit Switches
- 52 L2/L4 802.3at PoE+ Managed Switches
- 52 Web Smart Ethernet Switch
- 53 Unmanaged LCD PoE+ Switches
- 54 Industrial Flat-type PoE+ Switches
- 55 Unmanaged PoE+/PoE++ Switches
- 56 Multi-port PoE Injector Hubs
- 58 Single-port PoE Injectors & Splitters
- 60 PoE Extenders
- 61 Long Reach PoE L2/L4 IPv6 Managed Switches
- 62 Long Reach PoE Injectors & Extenders

63 Media Conversion

- 65 Managed Media Converter Chassis
- 66 Smart Gigabit Media Converters
- 66 Smart Fast Ethernet Media Converters
- 67 Smart 10Gigabit Media Converters
- 67 Media Converter Chassis



64 Media Conversion

- 68 10G Media Managed Converters
- 69 10G Ethernet Media Converter
- 70 Gigabit Managed Media Converters
- 70 Gigabit Media Converters
- 71 Gigabit PoE Media Converters
- 71 Fast Ethernet Media Converters
- 72 VDSL2 Media Converters
- 73 Serial over Ethernet Media Converters
- 74 RS422/RS485 Modbus Gateway
- 74 Video over Fiber Optic Converters

75 Broadband Communications

- 77 XGS-PON / XG-PON
- 77 xPON
- 78 VDSL2 Bridges/Routers

79 Wireless LANs

- 81 Wireless AP Management Solution
- 82 Hardware AP Controller
- 83 Enterprise Wi-Fi Networking Solution
- 83 Enterprise Wireless Access Points/Industrial Wireless Access Points
- 84 Wireless Network Adapter
- 84 IoT Wireless Solutions
- 85 Outdoor Wireless LAN Solutions
- 86 5GHz and 2.4GHz 802.11ax/ac Wireless Outdoor Solutions
- 86 Wireless Outdoor CPEs
- 87 5G NR Cellular Wireless Gateways
- 88 4G LTE Cellular Wireless Gateways
- 88 Wireless Antennas and Cable Accessories

89 IP Surveillance

- 91 AI-Enhanced Surveillance
- 92 H.265+ Surveillance
- 93 H.264 IP Cameras
- 93 AHD Cameras
- 94 Network Video Recorders
- 94 H.265+ Network Video Recorders
- 94 H.264 Network Video Recorders

95 IP Telephony

- 97 SIP IP Conference Phones
- 98 SIP Intercom & Door Phones
- 98 IP PBXs
- 99 SIP VoIP Gateway
- 99 Wireless SIP Router/DECT Phone

100 Network Security

- 101 VPN Security Routers / Industrial VPN Security Gateway Series
- 102 Industrial 5G NR/4G LTE Security Gateways

104 Network Peripherals

- 105 IP KVM
- 105 IP Power Managers
- 106 HDMI/Video Wall over IP Transmitters/Receivers
- 106 Ethernet Adapters
- 106 Powerline Ethernet Bridges

107 Home Automation

- 107 Cloud Home Automation
- 108 SIP Door Phones
- 108 Z-Wave Plus Sensors

Connecting Intelligence. Empowering the Future.

Founded in 1993 and headquartered in Taiwan, PLANET Technology Corporation is a global leader in IP-based networking solutions. With distribution in over 160 countries, PLANET excels in R&D, green energy design, and cross-protocol platforms. The company integrates IoT, IIoT, IoV, and AIoT technologies to support AI-driven applications and industrial automation. PLANET's commitment to ESG values and sustainable development has earned numerous international awards for innovation and corporate governance.



Quality

- Strick Quality Assurance
- Global Standards Compliant



Innovation

- Strong R&D
- Cutting-edge IP, AI, cybersecurity technologies
- Green energy design



Customer Commitment

- Long-term partnership
- Proactive client care



Sustainability

- Commitment to ESG principles
- Excellent Corporate Governance

Building AI & Industrial Network Infrastructure



Network Infrastructures

- 100Gbps Managed Switches
- 5G IoT Security Gateway
- 95W PoE Devices
- Long Reach PoE/PoC Solutions
- Industrial Ethernet Solutions
- Fiber Optic & Last Mile Solutions
- Renewable Energy PoE Network Solution
- IoT Security Gateway
- Intelligent Transportation System
- Data Center Switches
- IE 4.0 Network Communication



Versatile Networking

- Wi-Fi 7
- 5G NR Network
- HaLow/LoRaWAN IoT
- AI Surveillance
- Cybersecurity
- AV over IP
- VoIP
- IP Surveillance
- Serial over Ethernet, Modbus TCP, EtherCAT



Intelligent Network Solutions

- Universal Network Management Solution
- Industrial Automation
- Home Automation
- AIoT Intelligent Network Management System
- Renewable Energy & PoE Network Management
- CloudNMS Platform

Sustainable Corporate Development

PLANET emphasizes corporate social responsibility and ESG sustainable development, integrating these principles into its core business strategy while addressing domestic and international economic, environmental, and social issues.

ESG Initiatives

- ✓ SBTi Member
- ✓ Carbon Disclosure Project
- ✓ TCFD Supporter
- ✓ 4 per 1000 Initiative
- ✓ TNFD Adopters
- ✓ Earth Hour
- ✓ SME Climate Hub
- ✓ Earth Day
- ✓ Race to Zero

Certifications

- ✓ ISO 14067 certified
- ✓ ISO 14064-1 certified
- ✓ ISO 14001 certified
- ✓ IEC-62443-4-1 certified
- ✓ ISO 27001 certified

Worldwide Recognitions & Awards

Product Excellence



- IoT Application Category Award
- Sustainable Tech Special Award



Enterprise Excellence

- Top 5% of Corporate Governance Evaluation
- Ranked 1st in Excellence in CSR Award
- Forbes Asia's 200 Best Under A Billion
- Asia Responsible Enterprise Awards
- ICSB's Humane Entrepreneurship Award
- Linking ASSET Corporate Humanities Award



Network Management

Universal Network Management Solution Easy Management & Remote Monitoring

Events Notification

User-Friendly Dashboard

Remote Configure Cloud Devices

Real-time Monitoring Anytime, Anywhere

Cloud

CloudNMS App

Download on the App Store

Get it on Google play

CloudNMS

On-premises



NMSViewerPro

ONVIF

SNMP

MQTT

PLANET Smart Discovery



Industrial Ethernet



Industrial Power over Ethernet



5G Networks, Network Security



Wireless LAN

- > Topology View
- > Smart AP Control
- > Dashboard
- > SMTP Alert
- > Nodes Discovery
- > Event Report



Universal Network Management



PLANET CloudNMS Platform

The Next-Gen Cloud Network Management from Anywhere



CloudNMS, the next-generation cloud-based network management platform, combines centralized on-premises experience with secure, scalable cloud integration, enabling seamless cross-domain monitoring and control.



Centralized Cloud Management

Manage unlimited devices and organizations without the need for local controllers



Cross-Platform Access

Work seamlessly on any browser or through the CloudNMS App (iOS / Android)



Role-Based Access Control (RBAC)

Assign user privileges for admins, operators, and viewers



Scalable by Design

Effortlessly scale from local networks to global multi-site operations

Together with the CloudNMS App, it delivers a unified Web + Mobile experience, so IT teams can manage and monitor networks anytime, anywhere — empowered by AI-driven analytics and automation.

Instant Alerts
Never miss a critical event.



Mobile Configuration
Change settings directly on the go.



Quick Onboarding
Add devices in seconds with QR scan.



Multi-Org Management
One account, all sites under control



Seamless OTA Updates
Zero downtime, always up-to-date.



Secure Access
2FA + SSO, every action verified.




One premises NMS NMS Series Controller



Smart Central Management Over All Network Devices

PLANET Network Management System (NMS) Solution successfully integrates MQTT, SNMP, ONVIF protocol and PLANET Smart Discovery to enable IT administrators to monitor and further manage up to 10 types of networking devices, covering switches, routers, VoIP, IP Surveillance devices and more.

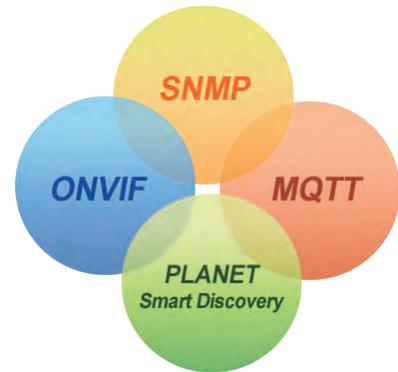

The exclusive product features for PLANET NMS solution include:

- Centralized control of up to 102,400 nodes
- System upgrade and license (free of charge)
- Intuitive and user-friendly management functions
- Cloud management via PLANET DDNS and Google Map
- 24/7 remote access and management from mobile devices



Node Discovery

To detect PLANET managed devices available and allow AP grouping to accelerate AP management.



USB Backup

Back up system profiles simply with a USB to prevent possible data loss. (NMS-500 & NMS-1000V)



Zone Plan

Optimizing AP deployment with actual signal coverage.



Topology Viewer

A topology of network devices compliant with SNMP, ONVIF, Smart Discovery and LLTD Protocol.



Authentication

Built-in RADIUS server seamlessly integrated into the enterprise network



Oracle Virtual Box

Employing Oracle VM technology to enhance operation flexibility. (UNI-NMS)



Event Reports

The status of a network can be reported via network alarm, system log, and SNMP trap.



SMTP Alert

To send an email alert to the administrator via the SMTP server.



NMS-500

Enterprise-class Universal Network Management Controller



NMS-1000V 12"

Touch Screen LCD Universal Network Management Controller



UNC-NMS

Universal Network Management Central Controller with LCD & 6 10/100/1000T LAN Ports



PLANET NMSViewerPro/CloudNMS

Cloud-based App

Universal Network Management Solution

PLANET Universal Network Management Solution provides a centralized platform to easily monitor and manage industrial-grade wired and wireless PoE networks. Supporting a wide range of managed devices through standard protocols, it enables seamless integration and rapid deployment. Available in both cloud-based and on-premise deployments, the solution offers flexible scalability or full local control to meet diverse security and operational needs. Featuring real-time monitoring, secure access control, and remote troubleshooting capabilities, it helps organizations improve efficiency, reduce downtime, and ensure reliable network operations.


Management Controller Type	Hardware UNC-NMS/UNI-NMS Controller with LCD		Hardware UNI-NMS Controller	Cloud-Based NMS Platform	Mobile App PLANET NMSViewerPro/PLANET CloudNMS	
Model No./System Name	UNC-NMS	NMS-1000V-12	NMS-500	PLANET CloudNMS	NMSViewerPro	PLANET CloudNMS



Management Controller Type		UNC-NMS	NMS-1000V-12	NMS-500	PLANET CloudNMS	NMSViewerPro	PLANET CloudNMS
Max. Manageable Devices		102,400	1,024	512	No-limit	1,024/512 determined by NMS Agent	No-limit
Dashboard	Interactive Dashboard	•	•	•	•	•	•
	Multi WAN Traffic History	–	•	•	•	•	• ¹
	Site Summary & Site Map	•	–	–	•	–	•
Sites Status Monitoring & Configuration	Site management with import CA	•	–	–	•	–	–
	Site map Configuration (up to 100 maps)	•	–	–	•	–	–
Devices Status Monitoring & Configuration	Online/Offline	•	•	•	•	•	•
	Domain Router Define	•	•	•	• ¹	•	•
	Switch Virtual Panel with Configuration Function	•	•	•	•	•	•
	Switch per port Traffic and PoE History Graph	•	•	•	•	–	•
Zero Touch Provisioning	Hyperlink Control	•	•	•	•	–	•
	Simple procedure: Rack, connect and power on	•	•	•	•	•	•
Topology auto-discovery mechanism	Topology auto-discovery mechanism	•	•	•	•	–	•
	Grouped alarm monitoring interface, defined according to customer requirements	•	•	•	•	•	• ¹
Fault Management	Customized alarm filter rules that enable the display of events in order of importance	• ¹	• ¹	• ¹	•	• ¹	• ¹
	System Event and Syslog daily list	•	•	•	•	•	• ¹
	SMTP Alert/Alert Pop Message	• / •	• / •	• / •	• / •	– / –	• / •
Performance Management	Uniform performance management system for all devices under management	•	•	•	•	–	•
	Monitor device CPU, disk and memory utilization	•	•	•	• ¹	–	• ¹
Security Management	https Hypertext Transfer Security Protocol, SSL/TLS plus sealed package	•	•	•	•	–	•
	Exchange certificate as authentication mechanism in NMS devices	•	•	•	•	–	•
Statistic Management	Top 10 events	• ¹	–	–	• ¹	–	• ¹
	History comparison	• ¹	–	–	• ¹	–	• ¹
	Critical events	• ¹	–	–	• ¹	–	• ¹
Diagnostics	Ping device IP	•	•	•	• ¹	–	• ¹
System Backup & Restore	USB Backup\Read Raw Data	•	•	•	•	–	–
	USB Backup\Restore System Setting Configuration	•	•	•	• ¹	–	–
Site Map / Floor Map		• / •	• / •	• / •	• / • ¹	–	–
Built-in DHCP Server		•	•	•	–	–	–
Built-in RADIUS Server		•	•	•	–	–	–
PLANET DDNS / Easy DDNS		• / •	• / •	• / •	–	–	–
AP Control		•	•	•	• ¹	•	• ¹
Remarks :						Android : 6.0 and above iOS : 13.0 and above	Android : 10 and above iOS : 16 and above
1. Future supported through firmware/patch upgrade							

Intelligent Renewable Energy Management Controller (NMS-360/NMS360V)

PLANET Renewable Energy Management Controller series (NMS-360 Series) is the world's first controller integrating green technology and exclusive intelligent PoE management functions to provide users with real-time remote management over renewable energy usage and connected PD operation status. With PLANET award-winning product, Renewable Energy PoE Switch/Router, BSP-360, the NMS-360 Series provides synchronous information on green power and battery status, instant/average PoE power usage analysis, as well as traffic logs that are compliant with MQTT protocol and PLANET Smart Discovery. The NMS-360 series automatically detects and manages up to 512 BSP-360 devices along with 2048 IP cameras via its user-friendly web UI.

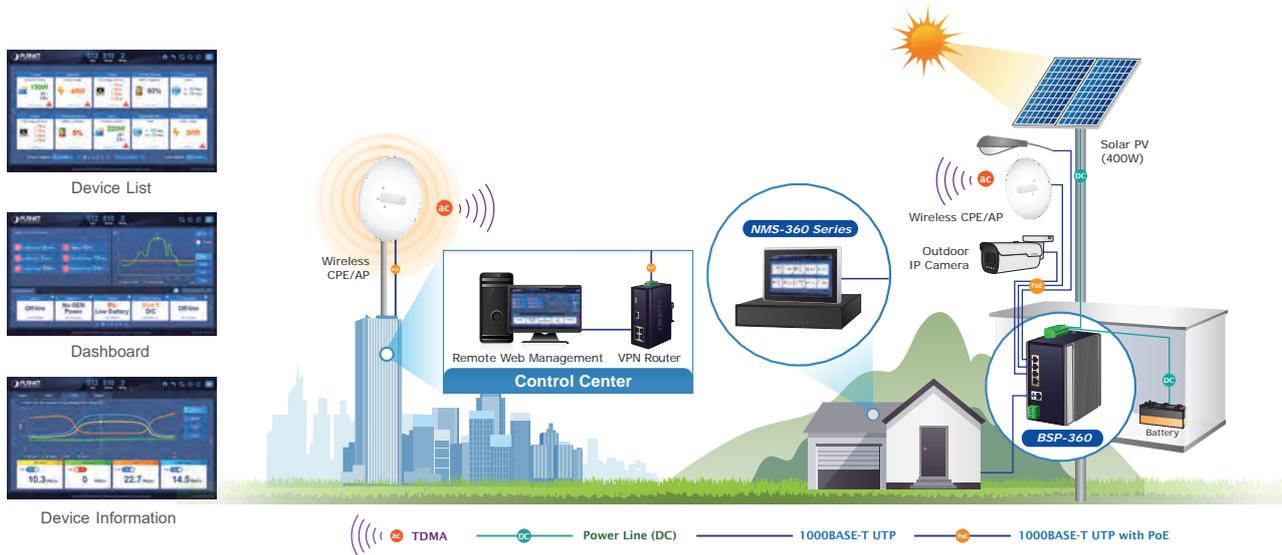

	NMS-360	NMS-360V-12
--	---------	-------------

Product Image



Hardware Interface		
LCD	-	12" Touch Panel
HDMI	-	1 x HDMI
GbE Ethernet	5 x GbE LAN RJ-45	2 x GbE LAN RJ-45
USB	Two USB3.0	2 x USB 3.0
Serial	One RJ45 Console port (COM1)	N/A
Watt	60W power adaptor (Level 6)	12": 29W
Software Feature		
Number of Managed Devices (BSP-360)	512	512
Number of IP cameras	2,048	2,048
Dashboard	●	●
Setup Wizard	●	●
Node Discovery	●	●
App-like Device Viewing	●	●
Event Table	●	●
Alarm System	●	●
Device Provisioning	●	●
Site Map	●	●
Remote PoE Control	●	●
User Control	●	●
Scalability	●	●
Backup/Restoration/Read	●	●
User Account Management	●	●
Network Services		
DDNS	Supports PLANET DDNS/Easy DDNS	Supports PLANET DDNS/Easy DDNS
DHCP	Built-in DHCP Server for auto IP assignment to APs	Built-in DHCP Server for auto IP assignment to APs
Management	SSL; Web browser (Chrome is recommended);	SSL; Web browser (Chrome is recommended);
Discovery	SNMP v1, v2c, v3	SNMP v1, v2c, v3
Standards Conformance		
Regulatory Compliance	CE, FCC	CE, FCC
Standards Compliance	IEEE 802.3 10BASE-T	IEEE 802.3 10BASE-T
	IEEE 802.3u 100BASE-TX	IEEE 802.3u 100BASE-TX
	IEEE 802.3ab Gigabit 1000BASE-T	IEEE 802.3ab Gigabit 1000BASE-T

LAN Switches

IP Stacking
Up to 24 Units



Layer 3 Enterprise Stackable Switches

» XGS-6350 / SGS-6341 / SGS-6310 Series



Layer 3 16-Port 10G SFP+ + 8-Port 25G SFP28 + 4-Port 100G QSFP28 Managed Switch
XGS-6350-16X8Y4C



Layer 3 48-Port 10/100/1000T 802.3at PoE + 6-Port 10G SFP+ Stackable Managed Switch
SGS-6310-48P6XR



Layer 3 48-Port 10/100/1000T + 4-Port 10G SFP+ Stackable Managed Switch
SGS-6341-48T4X



Layer 3 48-Port 10G SFP+ + 2-Port 40G QSFP+ + 4-Port 100G QSFP28 Managed Switch
XGS-6350-48X2Q4C



Layer 3 16-Port 100/1000X SFP + 8-Port Gigabit TP/SFP + 4-Port 10G SFP+ Stackable Managed Switch
SGS-6310-16S8C4XR



Layer 3 24-Port 10/100/1000T 802.3at PoE + 4-Port 10G SFP+ Stackable Managed Switch
SGS-6341-24P4X

IPv4 and IPv6 Hardware Layer 3 Routing

Designed for system integrators and SMEs, the Layer 3 series provides not only ultra high transmission performance and excellent Layer 3 technologies, but also IPv4 and IPv6 VLAN routing feature, which allows to get across different VLANs and different IP addresses for the purpose of having a highly-secure, flexible management and simpler networking application.



Powerful 10Gbps~100Gbps Ultra-high-bandwidth Solution for Big Data System

PLANET's 10Gbps~100Gbps managed switches boast a high-performance switch architecture that is capable of providing non-blocking switch capacity and wire-speed throughput as high as 128Gbps~1.28Tbps. They can handle extremely large amounts of data in a secure topology linking to backbone or high capacity servers where audio, video streaming and multicast applications are utilized, perfectly suitable for data centers, service providers and telecoms to establish high bandwidth for Big Data server farm.

User-friendly Management with Unique LCD Touch Screen

Aiming to promote the management efficiency in large-scale networks, PLANET provides world's first Color Touch LCD Ethernet Switch that offers quick installation, real-time monitoring of data transmission and PoE work status, and immediate troubleshooting through its unique LCD display found on the front panel. This cutting-edge Plug and Watch Ethernet solution makes the operation of the LCD Ethernet Switch simple for SMBs, enterprises, warehouses, factories, hotels, government buildings, and other public areas to manage their networks.



Efficient Single IP Management

PLANET stackable switch series applies the advantage of the stacking technology to managing the stack group with one single IP address, which helps network managers to easily manage a stack of switches instead of connecting and setting each unit one by one. It provides IP Stacking function to configure up to a total of 24 switches with up to 16 switches stacked up.

Build a High Computing Power Data Center

DCS-7342 Series



PLANET DCS-7342 series, equipped with 10G/25G SFP28 ports and 40G/100G QSFP28 ports, ensures seamless data transmission, enabling the network to operate efficiently even under the heaviest workloads. Whether managing big data, AI processing, or advanced cloud applications, these switches deliver the high bandwidth and stability required to maintain smooth operations.

The DCS-7342 series is engineered for resilience. It incorporates MLAG (Multi-Chassis Link Aggregation), enabling synchronization between paired switches to prevent downtime and ensure high availability. Furthermore, with support for VXLAN (Virtual Extensible LAN), this series facilitates advanced Layer 2 and Layer 3 switching, offering the flexibility to efficiently manage and connect VLANs across multiple locations.

Ideal for high-demand environments such as AI-powered data centers, cloud computing infrastructures, and enterprise-level IT operations, the PLANET L3 Multiport QSFP28 Managed Data Center Switch Series provides the scalability, reliability, and performance that networks require.

DCS-7342-32C


- 100G QSFP28 port x 32 (Backward compatible with 40G QSFP+ transceiver)
- Hot-pluggable fan modules x 2
- Hardware stacking up to 2 units

DCS-7342-48Y8C

- 25G SFP28 port x 48(Backward compatible with 10GBASE-X SFP+)
- 100G QSFP28 port x 8 (Backward compatible with 40G QSFP+ transceiver)
- Hot-pluggable fan modules x 2
- Dual 100~240V AC modular power
- Hardware stacking up to 2 units

DCS-7342-24X6C

- 10G SFP+ port x 24(Backward compatible with 1GBASE-X SFP)
- 100G QSFP28 port x 6 (Backward compatible with 40G QSFP+ transceiver)
- Hot-pluggable fan modules x 2
- Dual 100~240V AC modular power
- Gigabit wire-speed Layer 3 IPv4 and IPv6 routing
- Multi-Chassis Link Aggregation (MLAG)
- VxLAN/EVPN support, extends IPv6 application capabilities over IPv4 infrastructure.
- IP routing protocol: static routing, OSPFv2/v3, BGP4/4+, RIPvng, IS-IS
- IP multicast routing: IGMP, PIM-DM
- IEEE 802.1D/1W/1s Spanning Tree Protocol
- IEEE 802.1x, RADIUS, TACACS+, SSHv2.0, SNMPv3
- L2, L3 and L4 Access Control List and QoS
- Security and Event Management
- 100~240V AC Dual modular power supplies

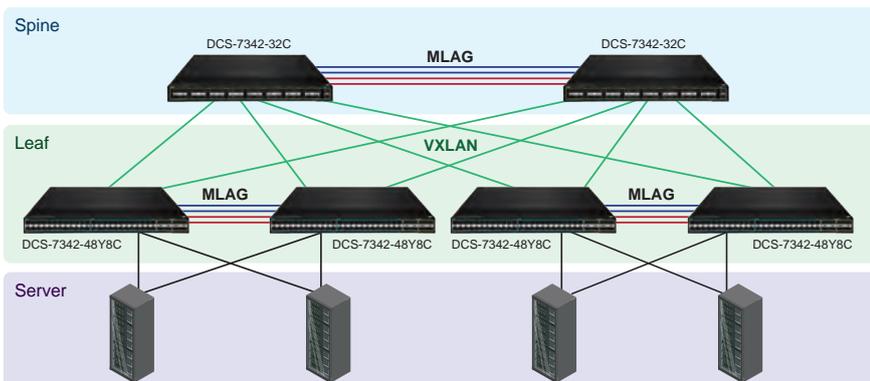


Layer 3 Managed Chassis Switches

CS-6300R



PLANET CS-6300R Series Core-Layer Routing Switch is specially designed for large network applications such as enterprises, campuses, communities, ISPs and data center networks where flexible configuration, large capacity, high density, high reliability and advanced traffic management are required.

The CS-6300R Series is a high-density chassis-based routing switch built with 6 module slots and redundant power supply. It provides great porting flexibility for network deployment by offering various and combinable management modules and standard interfaces. With 10-Gigabit and 40-Gigabit Ethernet technology applied, the CS-6300R Series provides broad bandwidth and powerful processing capacity. The Chassis Switch supports wire-speed L2/L3 forwarding and high routing performance for IPv4 and IPv6 protocols.

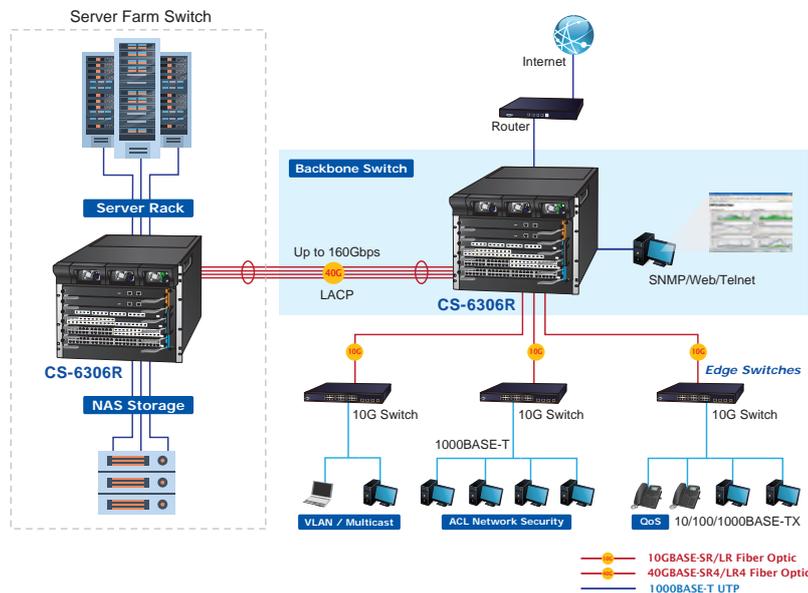

CS-6303R

- Max. 10/100/1000BASE-T port x 120
- Max. 1000BASE-SX/LX SFP port x 120
- Max. 10G SFP+ port x 40
- Max. 16-port 40G QSFP+ port x 8
- Max. GPON port x 48
- 19-inch, 4U rack-mount

CS-6306R

- Max. 10/100/1000BASE-T port x 192
- Max. 1000BASE-SX/LX SFP port x 192
- Max. 10G SFP+ port x 64
- Max. 16-port 40G QSFP+ port x 16
- Max. GPON port x 96
- 19-inch, 9U rack-mount

- Gigabit wire-speed Layer 3 IPv4 and IPv6 routing
- Four slots for optional Gigabit/10 Gigabit modules
- IP routing protocols: static routing, RIPv1/v2, OSPFv2, BGP4 & VRRP
- IP multicast routing: IGMP, PIM-DM/SM
- IEEE 802.1Q, Private VLAN and GVRP for VLAN management
- IEEE 802.1D/1w/1s Spanning Tree Protocol
- IEEE 802.1x, RADIUS, TACACS+, SSH and SSL
- L2, L3 and L4 Access Control List and QoS
- 100~240V AC redundant power system

Module	CS6-S48T	CS6-S48S	CS6-S24S8X	CS6-S24T8X	CS6-S24T24S	CS6-S16X	CS6-S4Q
--------	----------	----------	------------	------------	-------------	----------	---------



Product	CS6-S48T	CS6-S48S	CS6-S24S8X	CS6-S24T8X	CS6-S24T24S	CS6-S16X	CS6-S4Q
10/100/1000T	48	-	-	24	24	-	-
1000X SFP	-	48	24	-	24	-	-
10G SFP+	-	-	8	8	-	16	-
40G QSFP+	-	-	-	-	-	-	4

10G/40G/100G Fiber Managed Switches

XGS-6350 Series



Powerful Layer 3 Routing with Multiple 10Gbps~100Gbps Fiber Solution

PLANET XGS-6350 series, consisting of Layer 3 10Gbps~100Gbps Managed Switches, provides hardware-based Layer 3 routing capability with IPv4/IPv6 static routing, RIP (Routing Information Protocol) and OSPF (Open Shortest Path First) routing features. With ultra-high switching fabric, the XGS-6350 series can handle extremely large amounts of data in a secure topology linking to backbone or high capacity servers for enterprises, data centers, campuses and so on where VoIP, video streaming, and multicast applications are utilized.

XGS-6311 Series/XGS-6320 Series



10GBASE-T and 10GBASE-X SFP Dual Media Interfaces for Diversified Bandwidth Applications

PLANET XGS-6311/XGS-6320 series is a fully-managed all-port 10Gbps Ethernet switch designed for the demand of high-bandwidth required network equipment, such as Wi-Fi 7/6E wireless AP, NAS, workstation and those with 10Gbps fiber or copper interfaces. It has the capability to reach a high speed of 10Gbps over copper or fiber-optic cabling which helps to accelerate the performance of large data transmission. The built-in 10GBASE-T copper interfaces support 5-speed (10G/5G/2.5G/1G/100) auto-negotiation, and 10Gbps data transmission with the existing Cat6A/Cat7 UTP cabling.

XGS-6350-48X2Q4C

- 1G/10G SFP+ port x 48
- 40G QSFP+ port x 2
- 100G QSFP28 ports x 4
- Optional Hot-swappable 100~240V AC/36-72V DC redundant power
- Detachable fan modules

XGS-6350-16X8Y4C

- 1G/10G SFP+ port x 16
- 1G/10G/25G SFP28 port x 8
- 40/100G QSFP28 port x 4

XGS-6350-24X2C

- 1G/10G SFP+ port x 24
- 40G/100G QSFP port x 2

XGS-6350-12X8TR

- 1G/10G SFP+ port x 12
- 10/100/1000BASE-T port x 8
- Dual 100~240V AC redundant power

XGS-6311-12X

- 1G/10G SFP+ port x 12
- 13-inch desktop size

XGS-6311-8T4XR

- 100M/1G/2.5G/5G/10GBASE-T port x 8
- 1G/2.5G/10G SFP+ port x 4
- 100~240V AC/36-60V DC redundant power
- ITU G.8032 ERPS Ring

XGS-6320-8X8TR

- 100M/1G/2.5G/5G/10GBASE-T port x 8
- 1G/2.5G/10G SFP+ port x 8
- 100~240V AC/36-60V DC redundant power
- ITU G.8032 ERPS Ring

XGS-6320-12X4TR

- 100M/1G/2.5G/5G/10GBASE-T port x 4
- 1G/2.5G/10G SFP+ port x 12
- 100~240V AC/36-60V DC redundant power
- ITU G.8032 ERPS Ring

XGS-6320-8UP4X

- 100M/1G/2.5G/5G/10GBASE-T with 802.3bt PoE++ port x 8
- 1G/2.5G/10G SFP+ port x 4
- ITU G.8032 ERPS Ring

Layer 3 Enterprise Stackable Managed Switches

SGS-6341 Series/SGS-6310 Series/XGS3 Series




Cost-effective Layer 3 Routing Solution for Enterprise Intranet Networking

Designed for enterprises and small to medium-sized businesses where an intranet routing network is built, PLANET SGS-6341/SGS-6310 series, a Layer 3 Stackable Gigabit Managed Switch, provides hardware-based Layer 3 routing capability with IPv4 and IPv6 static routing, RIP (Routing Information Protocol) and OSPF (Open Shortest Path First) routing features which allow to cross over different VLANs and different IP addresses, and performs effective data traffic control for security, VoIP and video streaming applications.

Efficient IP Stacking Management

The SGS-6341 series supports IP stacking function that helps network managers to easily configure up to 24 switches in the same series via one single IP address instead of connecting and setting each unit one by one. It enables centralized management regardless of the series of switches being distributed in various locations. New switches can be flexibly added to the IP stacking group when network expands.

- IP Routing protocols: Static Routing, RIPv1/v2 and OSPFv2
- IPv4 and IPv6 Web Interface; SNMP v1, v2c and v3; SSH and SSL management
- IEEE 802.1Q VLAN, Private VLAN and GVRP
- IEEE 802.1w/1s/1D Spanning Tree Protocol
- Layer 2,3 and 4 Access Control List and QoS
- IGMP Snooping v1, v2 and v3; and MLD Snooping v1 and v2
- IP stack: up to 24 units and single IP address stack management

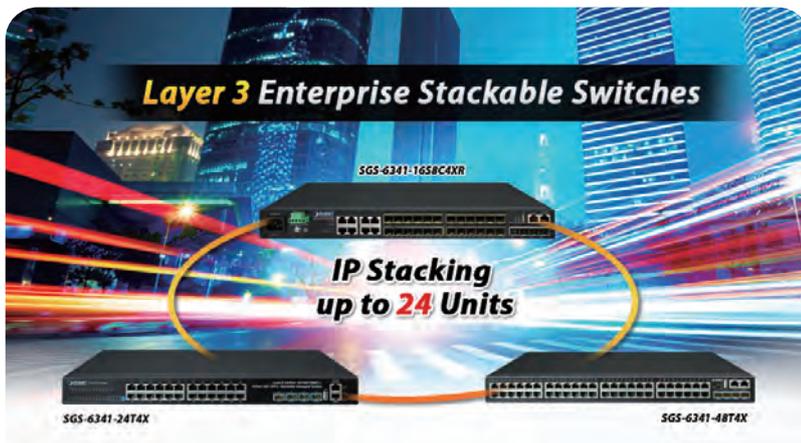

XGS3-2424Z

- 100/1000BASE-X SFP port x 24
- 10/100/1000BASE-T port x 8 shared with Port-1 to Port-8
- 10GBASE-X SFP+ port x 4
- 100~240V AC and 36~75V DC redundant power

SGS-6341-48T4X/SGS-6341-48T6X

- 100M/1G/2.5G/5G/10GBASE-T port x 8
- 10GBASE-X SFP+ port x 4/6
- USB interface for configuration file backup or upload

SGS-6341-16S8C4XR

- 100/1000BASE-X SFP port x 24
- 10/100/1000BASE-T port x 8 shared with Port-1 to Port-8
- 10GBASE-X SFP+ port x 4
- 100~240V AC and 36~75V DC redundant power system

SGS-6341-24T4X/SGS-6341-24T6X/ SGS-6341-24P4X/SGS-6341-24P6X

SGS-6341-24T4X/SGS-6341-24T6X

- 10/100/1000BASE-T port x 24
- 10GBASE-X SFP+ port x 4/6
- USB interface for configuration file backup or upload

SGS-6341-24P4X/SGS-6341-24P6X

- 10/100/1000BASE-T with 802.3at PoE+ port x 24
- 100/1000BASE-X SFP port x 4, shared with Port-21 to Port-24 (SGS-6341-24P4X)
- 10GBASE-X SFP+ port x 4/6
- 370-watt PoE budget

SGS-6310-48T6X/SGS-6310-48P6XR

SGS-6310-48T6X

- 10/100/1000BASE-T port x 48
- 10GBASE-X SFP+ port x 6
- Hardware stacking up to 8 units

SGS-6310-48P6XR

- 10/100/1000BASE-T with 802.3at PoE+ port x 48
- 10GBASE-X SFP+ port x 6
- 370-/740-watt PoE budget
- 100~240V AC and 55V DC dual power input for maximum PoE budget
- Hardware stacking up to 8 units

SGS-6310-24T4X/SGS-6310-24P4X

SGS-6310-24T4X

- 10/100/1000BASE-T port x 24
- 10GBASE-X SFP+ port x 4
- Hardware stacking up to 8 units

SGS-6310-24P4X

- 10/100/1000BASE-T with 802.3at PoE+ port x 24
- 10GBASE-X SFP+ port x 4
- 370-watt PoE budget
- Hardware stacking up to 8 units

SGS-6310-16S8C4XR

- 100/1000BASE-X SFP port x 24
- 10/100/1000BASE-T port x 8, shared with Port-1 to Port-8
- Dual 100~240V AC redundant power system
- Hardware stacking up to 8 units

SGS-6310-8P4X

- 10/100/1000BASE-T with 802.3at PoE+ port x 8
- 10GBASE-X SFP+ port x 4
- Hardware stacking up to 8 units

10G Layer 3 Managed Gigabit Switches

GS-6311 Series



PLANET GS-6311 series is a Layer 3 Managed Gigabit Switch that provides high-density performance, Layer 3 static routing, RIP (Routing Information Protocol) and OSPF (Open Shortest Path First). With 10Gbps interfaces, the GS-6311 series can handle extremely large amounts of data in a secure topology linking to an enterprise backbone or high-capacity servers. The powerful network security features make the GS-6311 series perform effective data traffic control for ISP and enterprise VoIP, video streaming, and multicast applications.

- IPv4 and IPv6 Layer 3 static routing
- IEEE 802.1Q VLAN, Private VLAN and Q-in-Q
- IGMP Snooping v1, v2 and v3; and MLD Snooping v1 and v2
- IEEE 802.1s MSTP and loop protection
- IPv6 Web interface; SNMP v1, v2c and v3; and SSH and SSL management

Layer 3/2+ IPv6 Managed Metro Switches

MGSW Series



To fulfill the growing demand for IP network deployment from LAN to MAN (Metropolitan Area Network), PLANET MGSW Gigabit Metro Ethernet Switch Series is specially designed to deliver profitable wide-ranging Ethernet network based on the optical fiber technology. Furthermore, it adopts "Front Access" design for easy wiring and maintenance of the MGSW Series in the cabinet.

- Redundant power system: dual -36V~-60V DC and 100V~240V AC
- -10 to 60 degrees C operating temperature
- IEEE 802.1Q VLAN, Protocol VLAN, GVRP and MVR
- IEEE 802.1D/1w/1s Spanning Tree Protocol for Ethernet redundancy
- Policy-based QoS, bandwidth control and storm control
- Layer 2, 3 and 4 Access Control List and port security
- Web; SNMP v1, v2c, v3; and Telnet remote IP management
- IPv6 and IPv4 dual stack management
- Digital input and digital output
- Front access design
- 19-inch, 1U rack-mountable installation

GS-6311-24T4X/GS-6311-24HP4X

GS-6311-24T4X

- 10/100/1000BASE-T port x 24
- 10GBASE-X SFP+ port x 4

GS-6311-24HP4X

- 10/100/1000BASE-T with 802.3bt PoE++ port x 8
- 10/100/1000BASE-T with 802.3at PoE+ port x 16
- 480-watt PoE budget

GS-6311-16S8C4XR

- 100/1000BASE-X SFP port x 24
- 10/100/1000BASE-T port x 8, shared with Port 1 to Port 8
- 10GBASE-X SFP+ port x 4
- 100~240V AC, 50/60Hz and 36~72V DC redundant power

GS-6311-48T6X/GS-6311-48P6X

GS-6311-48T6X

- 10/100/1000BASE-T port x 48
- 10GBASE-X SFP+ port x 6

GS-6311-48P6X

- 10/100/1000BASE-T 802.3at PoE+ port x 48
- 10GBASE-X SFP+ port x 6
- 600-watt PoE budget

GS-6311-24PL4X/GS-6311-24P4XV

GS-6311-24PL4X

- 10/100/1000BASE-T with 802.3at PoE+ port x 24
- 1G/10GBASE-X SFP+ port x 4
- 720-watt PoE budget

GS-6311-24P4XV

- 10/100/1000BASE-T with 802.3at PoE+ port x 24
- 1G/10GBASE-X SFP+ port x 4
- 370-watt PoE budget
- 2-inch Smart Color LCD for easy management and monitoring

MGS-6320-2T6S2X

- 100/1000BASE-T port x 2
- 100/1000BASE-X SFP port x 2
- 100/1000/2500BASE-X SFP port x 4
- 1000/2500/10GBASE-X SFP+ port x 2
- Supports ITU-G.8032 ERPS Ring
- Layer 3 OSPFv2 dynamic routing

MGSD-10080F

- 100/1000BASE-X SFP port x 6
- 100/1000/2500BASE-X SFP port x 2
- 10/100/1000BASE-T port x 2
- Supports ITU-G.8032 ERPS Ring

MGSW-24160F

- 100/1000BASE-X SFP port x 12
- 10/100/1000BASE-T port x 8
- 10GBASE-X SFP+ port x 4

MGSW-28240F

- 10/100/1000BASE-T ports x 4
- 100/1000BASE-X SFP port x 14
- 100/1000/2500BASE-X SFP port x 10
- 1000/2500/10GBASE-X SFP+ port x 4
- Supports ITU-G.8032 ERPS Ring
- Layer 3 OSPFv2 dynamic routing



10G Layer 3 IPv6 Managed Gigabit Switches

GS-6320 Series/GS-6322 Series



PLANET GS-6320/GS-6322 10G series is the Layer 3 IPv6 and IPv4 Gigabit Ethernet switch with 10Gbps uplink to greatly support SMB and enterprise networks to achieve 10Gbps high performance in a cost-effective way. The GS-6320/GS-6322 Series can work with PLANET ENW-9800 series or the third-brand 10Gbps server adapter to help SMBs build 10Gbps Ethernet network providing 10Gbps NAS (Network Attached Storage) or heavy transmission of video streaming service at an affordable price.

- IP Routing Protocols: Static Routing and OSPFv2
- 4 SFP+ slots support dual-speed, 10GBASE-SR/LR & 1GBASE-SX/LX/BX
- IPv6 Web interface; SNMP v1, v2c and v3; SSH and SSL management
- IEEE 802.1Q VLAN, Private VLAN, Q-in-Q, Protocol-based VLAN and MAC-based VLAN
- IEEE 802.1D/1w/1s Spanning Tree Protocol for Ethernet redundancy
- Layer 2, 3 and 4 Access Control List
- IGMP Snooping v1, v2 and v3; and MLD Snooping v1 and v2
- 19-inch, 1U rack-mount



CRPS Power supplies
GS-6322-24P4X

GS-6320-46S2C4XR

- 100/1000BASE-X SFP port x 48
- 10G SFP+ port x 4
- 10/100/1000BASE-T port x 2
- 1U height, 19-inch rack-mountable

PoE Models

GS-6322-24P4X

- 10/100/1000BASE-T with 802.3bt PoE port x 24
- 100/1G/2.5G/5G/10GBASE-T port x 2
- 1G/2.5G/10G SFP+ port x 2
- Up to 2280 watts PoE budget
- Up to 95 watts PoE output
- Supports dual modular power supply slots (CRPS power)

GS-6322-48UP4X

- 10/100/1000BASE-T with 802.3bt PoE port x 48
- 1G/2.5G/10G SFP+ port x 4
- Up to 3200 watts PoE budget
- Up to 95 watts PoE output
- Supports dual modular power supply slots (CRPS power)

Multigigabit L3 IPv6 Managed PoE Switches

MGS-6311/MGS-6320 Series



Multigigabit
2.5G

The MGS-6311/MGS-6320 series is PLANET's first Multigigabit Layer 3 Managed Switch. Offering PoE 2.5GBASE-T and dual-speed 10G SFP+ interfaces, it breaks the bandwidth limitation between wireless and wired networks. Featuring Layer 3 routing and PLANET Intelligent PoE functions, it provides highly secure and environment-friendly network management, accelerating the deployment of wireless network infrastructure for smart cities.

- IP Routing protocols: Static Routing, RIPv1/v2 and OSPFv2
- IPv6 Web interface; SNMP v1, v2c and v3; and SSH and SSL management
- Intelligent PoE functions including PD alive check, PoE schedule, scheduled power recycling and over-temperature protection
- 13-inch compact size/19-inch, 1U rack-mount

MGS-6320-8T2X

- 100M/1G/2.5GBASE-T port x 4
- 10/100/1000BASE-T port x 4
- 1G/2.5G/10GBASE-X SFP+ port x 2

MGS-6311-10T2X

- 100M/1G/2.5GBASE-T port x 8
- 1G/2.5G/5G/10GBASE-T port x 2
- 1G/10GBASE-X SFP+ port x 2

MGS-6311-8P2X/MGS-6311-8UP4X

- 100M/1G/2.5BASE-T with 802.3at PoE+ port x 8 (MGS-6311-8P2X)
- 100M/1G/2.5BASE-T with 802.3at PoE+ port x 8 (MGS-6311-8UP4X)
- 1G/10GBASE-X SFP+ port x 2/4
- 150-/240-watt PoE budget
- 13-inch desktop size, 19-inch rack-mountable

MGS-6311-24UPL6X

- 100M/1G/2.5GBASE-T with 802.3at PoE+ port x 24
- 1G/10GBASE-X SFP+ port x 6
- 720-watt PoE budget
- Up to 95 watts per PoE++ port

Touch LCD 10G Layer 3 IPv6 Managed Gigabit Switches



Intuitive LCD for Efficient Management

PLANET GS-6320-24UP2T2XV provides an intuitive touch panel on their front panels that facilitate the Ethernet management and PoE PD management. They greatly promote management efficiency in large-scale network and feature the following special management and status functions:

- IP address, VLAN and QoS configuration
- PoE management and status
- Port management and status/SFP information
- Troubleshooting: cable diagnostic and remote IP ping
- Maintenance: reboot, factory default and save configuration

The GS-6320-24UP2T2XV LCD PoE switch models featuring PLANET intelligent PoE management to improve the availability of critical business applications have an awesome feature -- ONVIF Support -- which is specifically designed for co-operating with Video IP Surveillances. From the GUI, you just need one click to search and show all of the ONVIF devices via network application, thus enabling to pinpoint the location of the particular surveillance device for easier inspection and planning.

GS-6320-24UP2T2XV

- 10/100/1000BASE-T with 802.3bt PoE port x 24
- 1G/10G SFP+ port x 2
- 10GBASE-T port x 2
- 600-watt PoE budget
- Up to 95 watts PoE output
- Supports 100~240V AC/48~60V DC redundant power

Layer 2+ IPv6 Managed Gigabit Switches

GS-5220 Series



PLANET GS-5220 series support both IPv4 and IPv6 management functions, and IPv4 and IPv6 Layer 3 static routing. It offers IPv4 and IPv6 VLAN routing feature which allows to crossover different VLANs and different IP addresses for the purpose of having a highly-secure, flexible management and simpler networking applications.

The GS-5220 Fiber Switch series as the fiber backbone switch providing 24 100/1000BASE-X dual-speed SFP slots can flexibly work with suitable SFP transceivers to have a long connection of up to 120km via optic fiber cabling.

With easy and friendly management interfaces and plenty of management functions included, PLANET GS-5220 series is the best choice for ISPs to build the IPv6 FTTx edge service and for SMBs to connect with IPv6 network.

- IPv4 and IPv6 Layer 3 static routing
- IPv6 Web interface; SNMP v1, v2c and v3; SSH and SSL management
- Static and IEEE 802.3ad Link Aggregation
- DHCP snooping/ARP Inspection and IP Source Guard
- IEEE 802.1Q VLAN, Private VLAN, Q-in-Q, Protocol-based VLAN and MAC-based VLAN
- IEEE 802.1D/1w/1s Spanning Tree Protocol
- QoS control list and bandwidth control
- 802.1X, RADIUS and TACACS+ authentication
- Layer 2, 3 and 4 Access Control List
- IGMP snooping v1, v2 and v3; and MLD snooping v1 and v2
- PoE models support PD alive check, PoE schedule, scheduled power recycling and over temperature protection

GS-5220-16S8CR

- 100/1000BASE-X SFP port x 24
- 10/100/1000BASE-T port x 8, shared with Port-1 to Port-8
- 10GBASE-X SFP+ port x 4
- Each SFP slot supports DDM
- 100~240V AC/36~72V DC redundant power

PoE Models

GS-5220-8P2T2S

- 10/100/1000BASE-T with 802.3at PoE+ port x 8
- 10/100/1000BASE-T port x 2
- 100/1000BASE-X SFP port x 2
- 240-watt PoE budget
- 13-inch desktop size, 1U rack-mountable
- Smart fan design for silent operation


Layer 2/4 IPv4/IPv6 Managed Gigabit Switches

GS-4210 Series



PLANET GSD and GS-4210 Gigabit Switch series delivers an advanced managed switching solution designed to enhance network performance, security, and operational efficiency. Equipped with a powerful L2/L4 switching engine, comprehensive IPv6/IPv4 management, and fanless green technology, the series provides a quiet, energy-efficient, and highly reliable networking environment suitable for modern SMB and SOHO applications. With flexible deployment capability and rich management features, it significantly improves usability and supports scalable next-generation network expansion, making it an ideal choice for businesses seeking cost-effective infrastructure upgrades and long-term network growth.

- IEEE 802.1Q VLAN, Q-in-Q, Private VLAN and GVRP
- IEEE 802.1w RSTP, IEEE 802.1s MSTP and loop protection
- IGMP snooping v2 and v3, and MLD snooping
- QoS, Voice VLAN and bandwidth control
- Layer 2, 3 and 4 Access Control List
- IEEE 802.1X and RADIUS authentication
- IPv4 and IPv6 Web interface; Telnet; SNMP v1, v2c and v3; and SSH and SSL management
- PoE models support PD alive check, PoE schedule, scheduled power recycling and over temperature protection

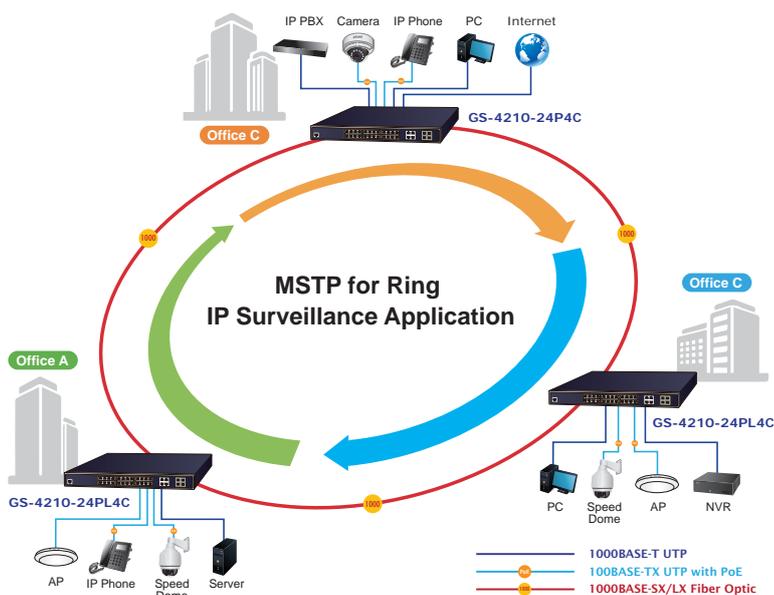

GS-4210-8T2S

- 10/100/1000BASE-T port x 8
- 100/1000BASE-X SFP port x 2
- 12-inch desktop size, 19-inch rack-mountable
- Internal power supply

GSD-1002M

- 10/100/1000BASE-T port x 8
- 100/1000BASE-X SFP port x 2
- 1 port supports 802.3af/at PoE DC 48~56V in-line power
- Compact size, wall-mount

GS-4210-16T2S/GS-4210-24T2S/ GS-4210-48T4S

- 10/100/1000BASE-T port x 16/24/48
- 100/1G/2.5G SFP port x 2 (GS-4210-16T2S/ GS-4210-24T2S)
- 100/1000BASE-X SFP port x 4 (GS-4210-48T4S)
- 100~240V AC, 50/60Hz power supply
- Fanless

GS-4210-24T4S/GS-4210-24T4SR

- 10/100/1000BASE-T port x 24
- 100/1G/2.5G SFP port x 4
- 100~240V AC, 50/60Hz power supply (GS-4210-24T4S)
- 100~240V AC, 50/60Hz and 36-72V DC redundant power (GS-4210-24T4SR)
- Fanless

PoE Models

GS-4210-8P2S/GS-4210-8UP2S/ GS-4210-8P2C

- 10/100/1000BASE-T with 802.3at PoE+ ports x 8
- 10/100/1000BASE-T with 802.3bt PoE++ ports x 8 (GS-4210-8UP2S)
- 10/100/1000BASE-T ports x 2 (GS-4210-8P2C)
- 100/1000BASE-X SFP ports x 2
- 140-/180-/120-watt PoE budget
- 12-inch desktop size, 1U rack-mountable

GS-4210-16P2S/GS-4210-24P2S/ GS-4210-48P4S

- 10/100/1000BASE-T with 802.3at PoE+ port x 16/24/48
- 100/1G/2.5G SFP port x 2/4
- 240-/370-/600-watt PoE budget
- Up to 30 watts per PoE port

GS-4210-16P4C

- 10/100/1000BASE-T with 802.3at PoE+ port x 16
- 10/100/1000BASE-T port x 4
- 100/1000BASE-X SFP port x 4
- 240-watt PoE budget
- Up to 30 watts per PoE port

GS-4210-24P4C/GS-4210-24PL4C

- 10/100/1000BASE-T with 802.3at PoE+ port x 24
- 10/100/1000BASE-T port x 4
- 100/1000BASE-X SFP port x 4
- 280/430-watt PoE budget
- Up to 30 watts per PoE port

GS-4210-8UP2X

- 10/100/1000BASE-T with 802.3bt PoE++ ports x 8
- 10GBASE-X SFP+ port x 2
- 240-watt PoE budget
- 12-inch desktop size, 1U rack-mountable

GS-4210-16UP8T4X/GS-4210-24UP4X

- 10/100/1000BASE-T port x 8 (GS-4210-16UP8T4X)
- 10/100/1000BASE-T with 802.3bt PoE++ port x 16/24
- 10GBASE-X SFP+ slot x 4
- Up to 95 watts of PoE power on 4-pair UTP
- 420/720-watt PoE budget

Professional AV-over-IP Managed Switch

AVS-4210 Series



To meet the increasing demand for IP-based audiovisual deployments in modern professional environments, PLANET AVS-4210 Series Managed AV Switches are specifically engineered to deliver reliable, scalable and high-performance AV-over-IP networking. Supporting PoE/PoE++ power delivery, high-bandwidth uplink interfaces and built-in multicast optimization, the AVS-4210 Series enables seamless signal transport and simplified device integration based on standard Ethernet infrastructure. It is ideal for professional AV applications including studios, auditoriums, conference centers, digital signage, broadcasting control rooms and multimedia production facilities.

- High-efficiency PoE/PoE++ power delivery for AV endpoint devices
- Dual user interfaces for simplified AV-over-IP deployment and professional switch management
- Layer 2/4 and Layer 2+ static routing capability for flexible network architecture
- IGMP and MLD snooping enabled by default for multicast traffic efficiency
- Seamless integration with Dante and NDI-based AV systems using predefined network profiles
- Optimized for professional AV environments requiring stable, low-latency IP transmission



Dante® Dante® is a registered trademark of Audinate Pty Ltd.

NDI® NDI® is a registered trademark of NewTek, Inc.

AVS-4210-8HP2X

- 10/100/1000BASE-T with 802.3at PoE+ port x 4
- 10/100/1000BASE-T with 802.3bt PoE++ port x 4
- 10GBASE-X SFP+ port x 2
- 240-watt PoE budget
- Layer 2+ static routing
- 12-inch desktop size, 1U rack-mountable

AVS-4210-24HP4X

- 10/100/1000BASE-T with 802.3at PoE+ port x 16
- 10/100/1000BASE-T with 802.3bt PoE++ port x 8
- 10GBASE-X SFP+ port x 4
- 450-watt PoE budget
- Enhanced cable management and aesthetic design by repositioning of RJ45 ports and the display panel

- Dual User Interfaces -- an intuitive AV-over-IP UI and a standard switch setting UI
- Multicast settings are enabled by default, ready for out-of-the-box use
- Effortlessly integrate the existing Dante and NDI products using pre-configured network profiles

Web Smart Ethernet Switch

GS-2210 Series



Efficient Network Management Through NMS and App

The GS-2210 Web Smart Switch series, known for such features as QoS, Link aggregation, VLANs, IGMP, and so on, provides an eye-catching feature called NMS developed by PLANET to easily and remotely manage and monitor network devices in the local environment from mobile app. This feature not only improves operational convenience, but also ensures users to have real-time control over their network infrastructure. It provides users with an unparalleled experience.

- PLANET NMS and NMSViewerPro for deployment management
- 8 to 24 IEEE 802.3at PoE ports with a total PoE budget of up to 260 watts
- Supports PoE schedule, PD alive check and ONVIF
- Supports static trunk, QoS, port isolation and cable diagnostics
- IPv4 IGMP snooping v1, v2; DHCP snooping and IEEE 802.1Q VLAN

GS-2210-8T2S/GS-2210-16T2S/ GS-2210-24T2S

- 10/100/1000BASE-T port x 8/16/24
- 100/1000BASE-X SFP port x 2

PoE Models

GS-2210-8P2S/GS-2210-16P2S/ GS-2210-24P2S

- 10/100/1000BASE-T with 802.3at PoE+ port x 8/16/24
- 100/1000BASE-X SFP port x 2
- 120/240/260-watt PoE budget

Layer 2 Unmanaged Gigabit Switches

- Auto MDI/MDIX on each port
- CSMA/CD protocol
- Store-and-Forward
- MAC address learning and aging
- Flow control to eliminate packet loss
- Auto-negotiation

GSW-1601

- 10/100/1000BASE-T port x 16
- 9K jumbo frame
- 8K MAC address table
- DIP switch for standard/VLAN/Flow control/Extend mode selection
- Fanless
- 19-inch, 1U rack-mountable



GSW-2401

- 10/100/1000BASE-T port x 24
- 9K jumbo frame
- 8K MAC address table
- DIP switch for standard/VLAN/Flow control/Extend mode selection
- Fanless
- 19-inch, 1U rack-mountable



GSD-503/GSD-803

- 10/100/1000BASE-T port x 5 (GSD-503)
- 10/100/1000BASE-T port x 8 (GSD-803)
- 9K jumbo frame
- Green networking for energy saving
- Made of metal



GSD-805

- 10/100/1000BASE-T port x 8
- 9K jumbo frame
- Internal power supply
- Desktop/wall-mount



Layer 2 Unmanaged Fast Ethernet Switches

FSD-503/FSD-803

- 10/100BASE-TX port x 5 (FSD-503)
- 10/100BASE-TX port x 8 (FSD-803)
- One power button
- Made of metal



SW-504

- 10/100BASE-TX port x 5
- 802.1Q VLAN transparency
- Made from plastic



Industrial Ethernet



Empowering **Industry 4.0** with Seamless Connectivity and Reliable Networking



Intelligent PoE Management



L3 OSPF Routing



10G Uplink



Cyber Security



RING



IEEE 1588

Comprehensive Industrial Networking Products



Fiber Switch



Renewable Energy



Media Conversion



Router



Flat-type



PoE

Unique Flat-type Design for Easy Management

PLANET offers industrial Ethernet switches and wireless AP in compact flat-type designs tailored for deployment in space-limited locations, such as wall enclosure or electric box found in buildings or outdoor environments, allowing flexible installation through wall mounting, magnetic mounting, or DIN rail.



Flat Design



Magnetic Installation



Front Access



Industry-leading Integration of PoE Technology and Renewable Energy

PLANET Industrial Renewable Energy PoE Switch utilizes renewable energy sources, such as solar, wind and hydroelectric power to save energy. Integrating 802.3at high power PoE technology, it enables flexible network deployment without geographical barriers, greatly accelerates the installations of wireless LAN or IP surveillance systems in remote areas.



EN50155 Ready for Intelligent Transportation Systems

Bringing uninterrupted operation and reliable network transmission for rolling stock applications, PLANET EN50155 compliant Industrial Ethernet Switches provide waterproof M12/RJ45 interfaces and guarantee stable Ethernet operation performance under high vibration and shock environment. The switches also feature wide-ranging operating temperature, redundant ring recovery, and intelligent PoE PD and power management functions, ensuring the highest level of reliability for mission-critical applications in any difficult environment.

Layer 3 and Layer 2 Industrial Managed Gigabit Switches

PLANET Industrial Ethernet Switches are industrially hardened to be specially designed to operate reliably in electrically harsh and climatically demanding environment. PLANET Layer 3 and Layer 2 Industrial Managed Switches, with model names starting with IGS or IGSW, include Managed Switches, Unmanaged Switches and PoE Switches. They all support full Gigabit port. The capital 'T' in the model name means that the product can support and operate under wide-ranging temperature from -40 to 75 degrees C.

Redundant Ring and Fast Recovery for Surveillance System

The IGS and IGSW series features strong, rapid self-recovery capability to prevent interruptions and external intrusions. It incorporates advanced ITU-T G.8032 ERPS (Ethernet Ring Protection Switching) technology, Spanning Tree Protocol (802.1s MSTP), and redundant power input system into customer's industrial automation network to enhance system reliability and uptime in harsh factory environments. In certain simple ring network, the recovery time of data link can be as fast as 20ms.

IMS-6325-5

- 10" Modular-based Ethernet Switch
- Fixed 4-port 10/100/1000BASE-T RJ45
- Fixed 4-port 1G/2.5G/10GBASE-X SFP+
- 5 flexible modular slots
- 4-port 10/100/1000BASE-T RJ45 line card module (IMS-4T)
- 4-port 100/1000BASE-X SFP line card module (IMS-4S)
- 4-port 10/100/1000BASE-T 802.3bt PoE++ line card module (IMS-4P-E)
- IEEE 1588 PTP transparent clock supported
- ITU G.8032 ERPS ring supported
- Layer 3 Dynamic Routing, RIPv1/v2 and OSPFv2/v3
- Built-in 2 DI and 2 DO



IGS-6325-20T4C4X

- 24-port 10/100/1000BASE-T
- 4-port 100/1000BASE-X SFP
- 4-port 1G/2.5G/10GBASE-X SFP+
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- L3 static route and OSPFv2 supported
- DI and DO supported
- 100~240V AC and 24~60V DC redundant power system



IGS-6325-20S4C4X

- 4-port 10/100/1000BASE-T
- 14-port 100/1000BASE-X SFP
- 10-port 100/1G/2.5GBASE-X SFP
- 4-port 1G/2.5G/10GBASE-X SFP+
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- Static route and OSPFv2 supported
- DI and DO supported
- 100~240V AC and 24~60V DC redundant power system
- EN61000-6-2, EN 61000-6-4



IGS-5225-16T4S/IGSW-24040T

- 16/24-port 10/100/1000BASE-T
- 4-port 100/1000BASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- DI and DO supported
- ERPS ring supported
- 100~240V AC and 36~60V DC redundant power system



IGS-R4215-24T4X

- 24-Port 10/100/1000 BASE-T RJ45
- 4-Port 100/1G/2.5G/10GBASE-X SFP+
- USB-to-RS232 console management interface
- DI and DO supported
- ITU G.8032 ERPS ring
- Layer 3 Static route supported
- 100~240V AC and 24~60V DC redundant power system



TSN-5225-6T2C/TSN-5225-4T2S/TSN-5225-4T

- Up to 8-port 10/100/1000BASE-T RJ45
- Up to 2-port 100/1000BASE-X SFP
- TSN(Time Sensitive Networking) technology
- IEEE 1588 PTP Master/Slave/Boundary/Transparent Clock
- ITU G.8032 ERPS ring
- 2 DI and 2 DO supported



TSN-6325-8T4S4X

- 8-port 10/100/1000BASE-T
- 4-port 100/1G/2.5GBASE-X SFP
- 4-port 1G/2.5G/10GBASE-X SFP+
- TSN (Time Sensitive Networking) technology
- IEEE 1588 PTP Master/Slave/Boundary/Transparent Clock supported
- ERPS ring supported
- Layer 3 RIPv1/v2 and OSPFv2/v3 dynamic routing
- DI and DO supported



IGS-6325-5X1T

- 5-port 1G/2.5G/10GBASE-X SFP+
- 1-port 100/1G/2.5G/5G/10GBASE-T RJ45
- IEEE 1588 PTP Transparent Clock supported
- ERPS ring supported
- Layer 3 RIPv1/v2 and OSPFv2/v3 dynamic routing
- 802.1Q VLAN, MSTP and IGMP snooping
- DI and DO supported



IGS-6325-4T2X

- 4-port 100/1G/2.5GBASE-T RJ45
- 2-port 1G/2.5G/10GBASE-X SFP+
- IEEE 1588 PTP transparent clock supported
- ITU G.8032 ERPS ring supported
- Layer 3 Dynamic Routing, RIPv1/v2 and OSPFv2/v3
- Built-in 2 DI and 2 DO



Layer 3 and Layer 2 Industrial Managed Gigabit Switches

IGS-6325-16T4S

- 16-port 10/100/1000BASE-T
- 4-port 100/1G/2.5GBASE-X SFP
- IEEE 1588 PTP Transparent Clock supported
- ERPS ring supported
- Layer 3 OSPFv2 dynamic routing
- 802.1Q VLAN, MSTP and IGMP snooping
- DI and DO supported



IGS-6325-16T4X

- 16-port 10/100/1000BASE-T RJ45
- 4-port 1G/2.5G/10GBASE-X SFP+
- IEEE 1588 PTP transparent clock
- ITU G.8032 ERPS ring
- Layer 3 Dynamic Routing, RIPv1/v2 and OSPFv2/v3
- DI and DO supported
- IP30 aluminum case with fanless design
- Operating temperature ranges from -40 ~ 75°C
- Supports 2 DI/DO



IGS-6325-8T8S4X/IGS-6325-8T8S IGS-6325-8T4X

- 8-port 10/100/1000BASE-T
- 8-port 100/1G/2.5GBASE-X SFP
- 4-port 10G BASE-X SFP+ (IGS-6325-8T8S4X)
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- IEEE 1588 PTP TC supported
- Static route and OSPFv2 supported
- DI and DO supported



IGS-5225-8T2S2X

- 8-port 10/100/1000BASE-T
- 2-port 100/1G/2.5GBASE-X SFP
- 2-port 10G BASE-X SFP+
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- IEEE 1588 PTP TC supported
- Static route and OSPFv2 supported
- DI and DO supported



IGS-20040MT/IGS-12040MT

- 16-/8-port 10/100/1000BASE-T
- 2-port 100/1000BASE-X SFP
- 2-port 100/1G/2.5GBASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- Static route supported
- DI and DO supported



IGS-10080MFT/IGS-10020MT

- 6-port 100/1000BASE-X SFP (IGS-10080MFT)
- 2-port 10/100/1000BASE-T (IGS-10080MFT)
- 8-port 10/100/1000BASE-T (IGS-10020MT)
- 2-port 100/1G/2.5GBASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- Static route supported



IGS-5225-4T2S

- 4-port 10/100/1000BASE-T
- 2-port 100/1G/2.5GBASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- Static route supported



IGS-4215-8T4X/IGS-4215-16T4X/ IGS-4215-24T4X

- 8/16/24-port 10/100/1000BASE-T RJ45
- 4-port 1G/2.5G/10GBASE-X SFP+
- USB-to-RS232 console management interface
- Supports G.8032 ERPS ring
- IP30 aluminum case with fanless design
- Operating temperature ranges from -40 ~ 75°C
- Support 2 DI/DO
- Layer3 Static route supported



IGS-4215-16T2S/IGS-4215-16T2S-U

- 16-port 10/100/1000BASE-T
- 2-port 100/1000BASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- Loop protection
- QoS, bandwidth control, storm control, Layer3/4 access control list
- ERPS Ring and Loop protection supported



IGS-4215-8T2S/IGS-4215-4T2S

- 8-port 10/100/1000BASE-T (IGS-4215-8T2S)
- 4-port 10/100/1000BASE-T (IGS-4215-4T2S)
- 2-port 100/1000BASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS Ring and Loop protection supported
- QoS, bandwidth control, storm control, Layer 3/4 access control list



IGS-801M

- 8-port 10/100/1000BASE-T
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- Loop protection
- QoS, bandwidth control, storm control, Layer3/4 access control list



Layer 2 Industrial Gigabit Switches

PLANET advanced industrial hardened Ethernet Switch series comes with a slim type, IP30 metal case. The compact IP30 standard metal case allows either DIN rail or wall mounting for efficient use of cabinet space. The capital 'T' in the model name means that the product can support and operate under wide-ranging temperature from -40 to 75 degrees C.

The Layer 2 Industrial Switch series incorporates redundant power supply system into customer's industrial automation network to enhance system reliability and uptime in the factory harsh environments. It protects customer's industrial network connectivity with power redundant ability. They provide IP30 metal case and 100BASE-FX port or Gigabit TP/SFP combo interfaces for long-distance uplink.

IGS-500T/IGS-500T-E/IGS-510TF/IGS-501T

- 5-port 10/100/1000BASE-T
- -40 to 75 degrees C wide-ranging temperature
- IP30 metal case (IGS-500T/IGS-510TF/IGS-501T)
- IP40 metal case (IGS-500T-E)
- Energy-Efficient Ethernet (IGS-500T)
- Compact size (IGS-500T-E/IGS-500T/IGS-510TF)
- 100/1000X SFP (IGS-510TF)



IGS-800T/IGS-801T

- 8-port 10/100/1000BASE-T
- -40 to 75 degrees C wide-ranging temperature
- IP30 metal case
- Energy-Efficient Ethernet
- Compact size (IGS-800T)



IGS-1600T/IGS-1820TF

- 16-port 10/100/1000BASE-T
- 2-port 1000BASE-X SFP (IGS-1820TF)
- -40 to 75 degrees C wide-ranging temperature
- IP40 metal case
- 12~48V DC, 24V AC redundant power



IGS-620TF

- 4-port 10/100/1000BASE-T
- 2-port 100/1000BASE-X SFP (DIP control)
- -40 to 75 degrees C wide-ranging temperature
- IP30 metal case
- Dual SFP ports with auto link redundancy via DIP selection



IGS-820TF

- 6-port 10/100/1000BASE-T
- 2-port 100/1000BASE-X SFP
- -40 to 75 degrees C wide-ranging temperature
- IP30 metal case
- Dual SFP ports with auto link redundancy via DIP selection
- Compact size



IGS-1020TF

- 10/100/1000BASE-T x 8 ports
- 100/1000BASE-X SFP x 2 ports
- IEEE 802.3az EEE Protocol based power saving
- 12 ~ 48V DC, 24V AC redundant power
- -40 to 75 degree C operating temperature
- IP 30 metal case, DIN rail and wall mount design



IGT-1205AT/IGT-2205AT/IGT-2205AT-E

- 1-/2-port 10/100/1000BASE-T
- 2 x SFP interfaces compatible with 100FX/1000SX/LX (DIP control)
- -40 to 75 degrees C wide-ranging temperature
- IP30 metal case (IGT-1205AT)
- IP40 metal case (IGT-2205AT-E)
- Compact size (IGT-2205AT-E)
- Dual SFP ports with auto link redundancy via DIP selection



IGS-1000-8T4X

- 8-port 10/100/1000BASE-T RJ45
- 4-port 1G/2.5G/10GBASE-X SFP+
- 9~48V DC, 24V AC redundant power
- -40 to 75 degree C operating temperature
- IP30 aluminum case with fanless design



IGS-800T-PN/IGS-820TF-PN

- 8-port Gigabit RJ45 and SFP
- -40 to 75 degrees C wide-ranging temperature
- Compliant with PROFINET Conformance Class A
- Supports PROFINET PTCP filter for reliable communication on PROFINET network
- Compact size



Layer 2 Industrial Fast Ethernet Switches

ISW-500T/ISW-500T-E/ISW-800T

- IP30 metal case (ISW-500T/ ISW-800T)
- IP40 metal case (ISW-500T-E)
- 5/8-port 10/100BASE-TX
- -40 to 75 degrees C operating temperature
- Energy-Efficient Ethernet



ISW-501T/ISW-801T

- 5/8-port 10/100BASE-TX
- -40 to 75 degrees C wide operating temperature
- IP30 metal case
- Energy-Efficient Ethernet



ISW-511T/ISW-511TS15

- 4-port 10/100BASE-TX
- 1-port 100BASE-FX
- Supports multi-mode fiber, 2km/15km distance
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



ISW-621T/ISW-621TS15

- 4-port 10/100BASE-TX
- 2-port 100BASE-FX
- Supports multi-mode fiber, 2km/15km distance
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



ISW-621TF

- 4-port 10/100BASE-TX
- 2-port 100BASE-FX SFP
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



IFGS-1022TF

- 8-port 10/100BASE-TX
- 2-port Gigabit TP/SFP combo interface
- -40 to 75 degrees C wide operating temperature
- IP30 metal case
- Dual DC 9-48V, AC 24V power input



ISW-1600T

- 16-port 10/100BASE-TX
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



IFGS-1822TF

- 16-port 10/100BASE-TX
- 2-port Gigabit TP/SFP combo interface
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



IFGS-620TF/IFGS-1222TF

- 4/8-Port 10/100BASE-T
- 2-Port 10/100/1000BASE-T (IFGS-1222TF)
- 2-Port 1000BASE-X (One Key Ring supported)
- -40 to 75 degrees C operating temperature
- Compact size metal case



Layer 3 and Layer 2 Industrial Managed Gigabit PoE Switches

PLANET Industrial Managed PoE Switch series in-line power follows standard IEEE 802.3af, IEEE 802.3at or IEEE 802.3bt and is able to give power to PoE compliant devices at the distance up to 100 meters through the 4-pair Cat. 5/5e UTP wire. With data and Power over Ethernet from one unit, the industrial PoE series can reduce cable deployment and eliminate the need for dedicated electrical outlets on the wall, ceiling or any unreachable place. Carrying PLANET's uniquely Intelligent PoE Functions such as PoE schedule, scheduled power recycling and PD alive check, the Industrial Managed PoE Switch Series greatly enhances the efficiency of network management and helps to save power and cost for the hardened network.

IGS-6329-8UP2S2X/ IGS-6329-8UP2S4X

- EN 61000-6-2 and EN 61000-6-4
- 8-port 10/100/1000BASE-T with 802.3bt PoE++
- 2-port 1G/2.5GBASE-X SFP
- 2-port 1G/2.5G/10GBASE-X SFP+
- 360-watt PoE budget/remote PoE power control
- 48-54V DC redundant power design
- ERPS ring supported
- L3 RIP and OSPFv2/v3 supported
- DI and DO support



IGS-6325-24UP4X

- 24-port 10/100/1000BASE-T RJ45 with 802.3bt 95W PoE++ support
- 4-port 1G/2.5G/10GBASE-X SFP+
- Layer 3 Dynamic Routing, RIPv1/v2 and OSPFv2/v3
- Supports IEEE 1588 PTP transparent clock
- Supports G.8032 ERPS ring
- PoE budget up to 1,440W max.
- Supports intelligent PoE features including PoE scheduling, temperature threshold and PD alive check



IGS-6325-24P4X

- 24-port 10/100/1000BASE-T
- 4-port 100/1000BASE-X SFP
- 4-port 1G/2.5G/10GBASE-X SFP+
- L3 static route and OSPFv2 supported
- 400-watt PoE budget/remote power control
- IPv6/IPv4 Web, Telnet and SNMP management
- ERPS ring supported
- -40 to 75 degrees C wide operating temperature



Layer 3 and Layer 2 Industrial Managed Gigabit PoE Switches

IGS-6325-24P4S

- 24-port 10/100/1000BASE-T
- 4-port 100/1000BASE-X SFP
- L3 static route and OSPFv2 supported
- 400-watt PoE budget/remote power control
- IPv6/IPv4 Web, Telnet and SNMP management
- ERPS ring supported
- -40 to 75 degrees C wide operating temperature



IGS-R4215-24P4X

- 24-Port 10/100/1000 BASE-T RJ45 with 802.3at PoE+
- 4-Port 100/1G/2.5G/10GBASE-X SFP+
- PoE budget up to 440W max.
- USB-to-RS232 console management interface
- DI and DO supported
- ITU G.8032 ERPS ring
- Layer 3 Static route supported



IGS-6325-16P4S

- 16-port 10/100/1000BASE-T with 802.3at PoE+
- 4-port 100/1G/2.5GBASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- ERPS ring supported
- -40 to 75 degrees C wide operating temperature
- DI and DO supported
- L3 Static route and OSPFv2 supported



IGS-6325-8UP2S/ IGS-6325-8UP2S2X

- 8-port 10/100/1000BASE-T with 802.3bt PoE++
- 360-watt PoE budget/remote PoE power control
- -40 to 75 degrees C wide operating temperature
- 48 ~ 56V DC redundant power design
- IEEE 802.1w/1s STP, IEEE 802.1Q VLAN and IGMP snooping v2 and v3
- ERPS ring supported
- L3 static route and OSPFv2 supported
- DI and DO supported



IGS-6325-4UP2X

- 4-port 100/1G/2.5GBASE-T RJ45 with 802.3bt 95W PoE++ support
- 2-port 1G/2.5G/10GBASE-X SFP+
- Layer 3 Dynamic Routing, RIPv1/v2 and OSPFv2/v3
- Supports IEEE 1588 PTP transparent clock
- Supports G.8032 ERPS ring
- PoE budget up to 360W max.
- Supports intelligent PoE features including PoE scheduling, temperature threshold and PD alive check



IGS-5225-8P2S2X

- 8-port 10/100/1000BASE-T with 802.3at PoE+
- 240-watt PoE budget/remote PoE power control
- -40 to 75 degrees C wide operating temperature
- 48 ~ 56V DC redundant power design
- IEEE 802.1w/1s STP, IEEE 802.1Q VLAN and IGMP snooping v2 and v3
- ERPS ring supported
- L3 static route and OSPFv2 supported
- DI and DO supported



IGS-20160HPT

- 16-port 10/100/1000BASE-T with 802.3at PoE+
- 2-port 10/100/1000BASE-T
- 2-port 100/1G/2.5GBASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- Static route supported
- -40 to 75 degrees C wide operating temperature
- DI and DO supported



IGS-5225-8P2T2S

- 8-port 10/100/1000BASE-T with 802.3at PoE+
- 2-port 10/100/1000BASE-T
- 2-port 100/1G/2.5GBASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- Static route supported
- -40 to 75 degrees C wide operating temperature
- DI and DO supported



IGS-5225-8P4S/IGS-5225-8P2T4S

- 8-port 10/100/1000BASE-T with 802.3at PoE+
- 2-port 100/1000BASE-X SFP
- 2-port 100/1G/2.5GBASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- Static route supported
- -40 to 75 degrees C wide operating temperature
- DI and DO supported



Layer 3 and Layer 2 Industrial Managed Gigabit PoE Switches

IGS-5225-8P4S-12V

- 8-port 10/100/1000BASE-T with 802.3at PoE+
- 2-port 100/1000BASE-X SFP
- 2-port 100/1G/2.5GBASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- Static route supported
- -40 to 75 degrees C wide operating temperature
- DI and DO supported
- 12-54V DC redundant power



IGS-10020HPT/IGS-10020HPT-U

- 8-port 10/100/1000BASE-T with 802.3af/at PoE+
- 2-port 100/1G/2.5GBASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- Static route supported
- -40 to 75 degrees C wide operating temperature
- DI and DO supported
- 12-48V DC redundant power



IGS-10020PT

- 8-port 10/100/1000BASE-T with 802.3af/at PoE+
- 2-port 100/1G/2.5GBASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- Static route supported
- -40 to 75 degrees C wide operating temperature
- DI and DO supported



IGS-5225-4UP1T2S/ IGS-5225-4UP1T2S-12V

- 4-port 10/100/1000BASE-T with 802.3bt/802.3at PoE
- 1-port 10/100/1000BASE-T
- 2-port 100/1G/2.5GBASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- Static route supported
- -40 to 75 degrees C wide operating temperature
- DI and DO supported



IGS-5225-4P2S

- 4-Port 10/100/1000BASE-T with 802.3at PoE+
- 2-Port 100/1G/2.5GBASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- Static route supported
- -40 to 75 degrees C wide operating temperature



IGS-4215-16P2T2S

- 16-port 10/100/1000BASE-T with 802.3at PoE+
- 2-port 10/100/1000BASE-T
- 2-port 100/1000BASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- -40 to 75 degrees C wide operating temperature
- ERPS Ring and Loop protection supported



IGS-4215-8P2T2S

- 8-port 10/100/1000BASE-T with 802.3at PoE+
- 2-port 10/100/1000BASE-T
- 2-port 100/1000BASE-X SFP
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- -40 to 75 degrees C wide operating temperature
- ERPS Ring and Loop protection supported



IGS-4215-4P4T2S/IGS-4215-4P4T

- 4-port 10/100/1000BASE-T with 802.3at PoE+
- 4-port 10/100/1000BASE-T
- 2-port 100/1000BASE-X SFP (IGS-4215-4P4T2S)
- IPv6/IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- -40 to 75 degrees C wide operating temperature



IGS-4215-4UP4T2S

- 4-port 10/100/1000BASE-T with 802.3bt PoE++
- 4-port 10/100/1000BASE-T
- 2-port 100/1000BASE-X SFP
- Intelligent PoE PD alive check, PoE schedule and PD scheduled reboot
- IPv6/IPv4 Web, Telnet and SNMP Management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS Ring and Loop protection supported



IGS-4215-8UP2T2S

- 8-port 10/100/1000BASE-T with 802.3bt PoE++
- 2-port 10/100/1000BASE-T
- 2-port 100/1000BASE-X SFP
- Intelligent PoE PD alive check, PoE schedule and PD scheduled reboot
- IPv6/IPv4 Web, Telnet and SNMP Management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS Ring and Loop protection supported



IGS-4215-8UP4X

- 8-port 10/100/1000BASE-T RJ45 with 802.3bt 95W PoE++ support
- 4-port 1G/2.5G/10GBASE-X SFP+
- USB-to-RS232 console management interface
- Supports G.8032 ERPS ring
- IP30 aluminum case with fanless design
- -40 to 75 degrees C wide operating temperature
- PoE budget up to 360W max.
- Layer 3 static route supported



IGS-4215-16P4X

- 16-port 10/100/1000BASE-T RJ45 with 802.3at 36W PoE+ support
- 4-port 1G/2.5G/10GBASE-X SFP+
- USB-to-RS232 console management interface
- Supports G.8032 ERPS ring
- IP30 aluminum case with fanless design
- -40 to 75 degrees C wide operating temperature
- PoE budget up to 360W max.
- Layer 3 static route supported



Layer 2 Industrial PoE Switches/Extenders

PLANET industrial PoE switch series in-line power follows standard IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt and is able to give power to PoE compliant devices at the distance up to 100 meters through the 4-pair CAT5/5e UTP wire. As un-managed industrial PoE switch offers very easy-to-use Power over Ethernet function, customer just needs to connect their PoE device to un-managed industrial PoE switch, and just plug and play.

ISW-504PT/ISW-504PT-E

- 4-port 10/100BASE-TX with 802.3at PoE
- 1-port 10/100BASE-TX
- -40 to 75 degrees C wide operating temperature
- IP40 metal case
- 12~48V DC redundant power design (ISW-504PT)
- 250m in distance with 25-watt power output in Extend mode (ISW-504PT)
- Compact size (ISW-504PT-E)
- 48-55V DC redundant power design (ISW-504PT-E)



ISW-514PTF

- 4-port 10/100BASE-TX with 802.3at PoE
- 1-port 100BASE-FX SFP
- -40 to 75 degrees C wide operating temperature
- IP40 metal case
- 12~48V DC redundant power design
- 250m in distance with 25-watt power output in Extend mode



IFGS-624PTF

- 4-Port 10/100BASE-T with 802.3at PoE+
- 2-Port 1000BASE-X (One Key Ring supported)
- -40 to 75 degree C operating temperature
- Compact size metal case



IFGS-1022HPT

- 8-port 10/100BASE-TX with 802.3at PoE+
- 2-port Gigabit TP/SFP combo for uplink
- 240-watt PoE budget
- -40 to 75 degrees C wide operating temperature
- IP30 metal case
- 250m in distance with 30-watt power output in Extend mode



IGS-504PT/IGS-504HPT/IGS-514PT

- 4-port 10/100/1000BASE-T with 802.3at PoE+
- 1-port 10/100/1000BASE-T
- Smart PoE power usage LED indicator
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



IGS-624HPT/IGS-614HPT

- 4-port 10/100/1000BASE-T with 802.3at PoE+
- 2-port 100/1000BASE-X SFP (DIP Control)
- Dual SFP Ports Auto Link Redundant
- Mode supported (IGS-624HPT)
- Smart PoE power usage LED indicator
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



IGS-1020PTF/IGS-1020PTF-12V

- 8-port 10/100/1000BASE-T with 802.3at PoE+
- 2-port 100/1000BASE-X SFP combo for uplink
- 240-watt PoE budget
- -40 to 75 degrees C wide operating temperature
- IP30 metal case
- 12~48V DC redundant power design
- 250m in distance with 25-watt power output in Extend mode



IGS-824UPT

- 4-port 10/100/1000BASE-T with 802.3bt PoE++
- 2-port 10/100/1000BASE-T
- 2-port 100/1000BASE-X SFP
- 240-watt PoE budget
- -40 to 75 degrees C operating temperature
- Supports PoH PoE and Legacy detection



IGS-1000-4UP2X/IGS-1000-8UP4X

- 8-Port 10/100/1000BASE-T RJ45 with 802.3bt 95W PoE++ (IGS-1000-8UP4X)
- 4-Port 10/100/1000/2500BASE-T RJ45 with 802.3bt 95W PoE++ (IGS-1000-4UP2X)
- 2/4-Port 100/1G/2.5G/10GBASE-X SFP+
- PoE budget up to 360W max.
- Dual 48~54V DC redundant power
- -40 to 75 degree C operating temperature
- IP30 aluminum case with fanless design



IPOE-E302

- IP67 aluminum case, outdoor installation
- Waterproof/dustproof RJ45 Ethernet connector
- 1-port IEEE 802.3bt PoE++ PD
- 2-port IEEE 802.3at PoE PSE
- Max. total PoE budget up to 60 watts
- -40 to 75 degrees C operating temperature
- Extends Cat.5 cable installations to beyond 100 meters



IPOE-E174

- Forwards both Ethernet data and in-line power to 4 remote devices
- 1-port ultra Power over Ethernet PD
- 4-port IEEE 802.3af/at Power over Ethernet/end-span PSE
- Supports PoE output power up to 30.8 watts for each PoE port
- Extends the range of PoE for an additional 100 meters (328ft.)
- -40 to 75 degrees C wide operating temperature



WGS-E304PT

- Forwards both Ethernet data and in-line power to 4 remote devices
- 1-port ultra Power over Ethernet PD
- 4-port IEEE 802.3af/at Power over Ethernet/end-span PSE
- Supports PoE output power up to 30.8 watts for each PoE port
- Extends the range of PoE for an additional 100 meters (328ft.)
- -40 to 75 degrees C wide operating temperature



EN50155 ITS Ethernet Network Solution



ITS-6326 Series

- Compliance with Railway Certification EN 50155
- Up to 16-port 10/100/1000BASE-T M12 X-coded with 802.3at PoE+
- Up to 2-port 1G/2.5G/5G/10GBASE-T M12 X-coded
- Up to 2-port 10GBASE-X Q-ODC connector slot
- 16.8-137.5V Dual DC power design
- Up to 100-watts PoE budget
- Bypass relay prevents link failure during power loss
- Layer 3 Dynamic Routing, RIPv1/v2 and OSPFv2/v3
- Supports IEEE 1588 PTP transparent clock
- ERPS ring supported
- -40 to 70 degree C wide operating temperature



ITS-5216 Series

- 12-port Gigabit M12 connectors, including 8-port IEEE 802.3at PoE+
- Rugged IP50 industrial design, wide operating temperature -40~70°C
- Smart PoE management: PD Alive Check / Scheduling / Auto Reboot
- Dual 24-110V DC Power Input for high availability
- ERPS support with sub-500ms fast network recovery
- Bypass relay prevents link failure during power loss



IGS-5227X-4P2T

- IP67 aluminum case, outdoor installation
- Waterproof and dustproof M12 Ethernet connector against vibration and shock
- -40 to 75 degrees C wide operating temperature
- 12-48V DC redundant power design
- 144-watt PoE budget/remote PoE power control
- PoE schedule, scheduled power recycling and PD alive check functions
- ERPS Ring Data Recovery time < 50ms
- IPv4/IPv6 Layer 3 static routing and route summarization



IGS-604HPT-M12/IGS-604HPT-RJ

- IP67 aluminum case, outdoor installation
- Waterproof/dustproof M12/RJ45 Ethernet connector
- 4-port 10/100/1000BASE-T with 802.3at PoE+
- 2-port 10/100/1000BASE-T
- 48-56V DC redundant power design
- Up to 144-watts PoE budget
- -45 to 75 degree C wide operating temperature
- IPv6 and IPv4 Web, Telnet and SNMP management
- ERPS ring supported
- Layer 3 static route supported



IGS-5227-6MT-X

- IP67 aluminum case, outdoor installation
- Waterproof and dustproof M12 Ethernet connector against vibration and shock
- -40 to 75 degrees C wide operating temperature
- 12-48V DC redundant power design
- ERPS Ring Data Recovery time < 50ms
- IPv4/IPv6 Layer 3 static routing and route summarization



IGS-5227-6T

- IP67 aluminum case, outdoor installation
- Waterproof/dustproof RJ45 Ethernet connector
- 6-port 10/100/1000BASE-T
- IPv6 and IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS ring supported
- Static route supported
- -40 to 75 degrees C wide operating temperature



WGS-5225-8MT

- IP30 metal case, flat-type design
- Dustproof M12 Ethernet connector against vibration and shock
- 8-port 10/100/1000BASE-T
- Bypass relay prevents link failure during power loss
- 9-48V DC redundant power design
- ERPS ring supported
- Layer 3 static route supported



ISW-808PT-M12A/ ISW-808PT-M12

- 8-port 10/100BASE-TX with 802.3at PoE
- IP67 aluminum case
- Robust M12 Ethernet connector
- -40 to 75 degrees C wide operating temperature



ISW-800T-M12

- 8-port 10/100BASE-TX
- IP67 aluminum case
- Robust M12 Ethernet connector
- Waterproof and dustproof
- -40 to 75 degrees C wide operating temperature



Layer 3 and Layer 2 Industrial Flat-type Ethernet Switches

WGS-6325-8UP2X

- 4-port 100/1G/2.5GBASE-T RJ45 with 802.3bt PoE++
- 4-port 10/100/1000BASE-T RJ45 with 802.3bt PoE++
- 2-port 1G/2.5G/10GBASE-X SFP+
- 95W output per PoE++ port, up to total 480W PoE budget
- Layer 3 Dynamic Routing, RIPv1/v2 and OSPFv2/v3
- 1588 PTP transparent clock supported
- G.8032 ERPS ring supported
- PoE schedule, scheduled power recycling and PD alive check



WGS-5225-8UP2SV

- 2.4-inch color LCD touch screen with management function
- 8-port 10/100/1000BASE-T with 802.3bt PoE++
- 2-port 100/1G/2.5GBASE-X SFP
- 720-watt PoE budget
- ERPS ring supported
- Layer 3 static route supported
- PoE schedule, scheduled power recycling, PD alive check



WGS-5225-8P2S/WGS-5225-8P2SV

- 2.4-inch color LCD touch screen with management functions (WGS-5225-8P2SV)
- 8-port 10/100/1000BASE-T with 802.3at PoE+
- 2-port 100/1G/2.5GBASE-X SFP
- 802.1Q VLAN, MSTP and IGMP Snooping
- ERPS ring and IEEE 1588 supported
- Static route supported
- Modbus TCP
- PoE schedule, scheduled power recycling, PD alive check



WGS-5225-8T2SV

- 2.4-inch color LCD touch screen with management functions
- 8-port 100/1G/2.5G/1000BASE-T
- 2-port 100/1G/2.5GBASE-X SFP
- 802.1Q VLAN, MSTP and IGMP Snooping
- ERPS ring and IEEE 1588 supported
- Static route supported
- Modbus TCP



WGS-5225-8MT

- IP30 metal case, flat-type design
- Dustproof M12 Ethernet connector against vibration and shock
- 8-port 10/100/1000BASE-T
- Bypass relay prevents link failure during power loss
- 9~48V DC redundant power design
- ERPS ring supported
- Layer 3 static route supported



WGS-5215-16UP4XV/ WGS-5215-16UP4X

- 2.4-inch color LCD touch screen with management functions (WGS-5215-16UP4XV)
- 16-port 10/100/1000BASE-T RJ45 with 802.3bt PoE++
- 4-port 100/1G/2.5G/10GBASE-X SFP+
- PoE budget up to 720W max.
- Dual 48~54V DC redundant power
- ITU G.8032 ERPS ring
- Layer 3 Static route supported



WGS-4215-8P2X/WGS-4215-8P2XV

- 2.4-inch color LCD touch screen with management functions (WGS-4215-8P2XV)
- 8-Port 10/100/1000 BASE-T RJ45 with 802.3at PoE+
- 2-Port 100/1G/2.5G/10GBASE-X SFP+
- PoE budget up to 288W max.
- Dual 48~54V DC redundant power
- ITU G.8032 ERPS ring
- Layer 3 Static route supported



WGS-4215-16P2S

- 16-port 10/100/1000T with 802.3at PoE+
- 2-port 100/1000X SFP
- -10 to 60 degrees C wide operating temperature
- 48~54V DC dual power input
- 240-watt PoE budget, up to 16 PoE port
- PD alive check, scheduled power recycling and time-based PoE schedule
- IPv6 and IPv4 Web; Telnet; SNMPv1, v2c, v3; SSHv2/TLSv1.2 management
- QoS, bandwidth control, storm control, Layer 3/4 access control list
- STP/RSTP/MSTP, LACP



WGS-4215-8HP2S/WGS-4215-8P2S

- 8-port 10/100/1000BASE-T RJ45 with 802.3at PoE+
- 8-port 10/100/1000BASE-T RJ45 with 802.3bt 95W PoE++ (WGS-4215-8HP2S)
- 2-Port 100/1GBASE-X SFP
- Up to 200/360-watts PoE budget
- ERPS ring supported
- PoE schedule, schedule power recycling, PD alive check
- IPv6/IPv4 Web; Telnet; SNMPv1, v2c, v3; SSHv2/TLSv1.2 management



Layer 3 and Layer 2 Industrial Flat-type Ethernet Switches

WGS-4215-8T2S/WGS-4215-8T

- 8-port 10/100/1000BASE-T
- 2-port 100/1000BASE-X SFP (WGS-4215-8T2S)
- -40 to 75 degrees C wide operating temperature
- 24V AC and 12~48V DC redundant power
- Compact size, magnetic wall mount and DIN-rail design
- IPv6 and IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping



WGS-804HPT

- 4-port 10/100/1000BASE-T with 802.3at PoE+
- 4-port 10/100/1000BASE-T
- -40 to 75 degrees C wide operating temperature
- 48~54V DC redundant power
- Compact size, magnetic wall mount and DIN-rail design
- IPv6 and IPv4 Web, Telnet and SNMP management
- 802.1Q VLAN, MSTP and IGMP snooping
- LED indicators for PoE usage and status



WGS-818HP/WGS-814HP/WGS-804HP

- 4-port 10/100/1000BASE-T with 802.3at PoE+
- 4-port 10/100/1000BASE-T
- -10 to 60 degrees C operating temperature
- 48~56V DC redundant power
- Compact size, magnetic wall mount and DIN-rail design
- LED indicators for PoE usage and status
- 250m in distance in Extend mode



WGS-803

- 8-port 10/100/1000BASE-T
- -10 to 60 degrees C operating temperature
- 24V AC and 12~48V DC redundant power
- Compact size, magnetic wall mount and DIN-rail design
- 250m in distance in Extend mode



Renewable Energy PoE Switches & Management Controller Series

BSP-4215-6P2T2X

- 8-port 10/100/1000BASE-T with 4-port 802.3bt PoE++ and 2-port 802.3at PoE+
- 2-Port 10G/2.5G/1G SFP+
- Redundant PV/BAT power Input ensures continuous operation
- Supports 15-27V solar panel input with 12V battery, and 32-45V solar panel input with 24V battery
- MPPT Charge Controller
- Compatible with lithium battery, lithium iron battery or lead-acid battery



BSP-360

- 4-port 10/100/1000BASE-T with 802.3at PoE+
- 1-port 10/100/1000BASE-T WAN
- 1 24V DC power output terminal block
- -10 to 60 degrees C operating temperature
- MPPT Charge Controller
- Supports Lithium and Lead-acid Battery



BSP-115HP-5A/BSP-115PV-15A

- 1-port 10/100/1000BASE-T RJ45 with 802.3bt PoE++ (BSP-115HP-5A)
- 2/5-port 10/100/1000BASE-T RJ45 with 802.3at PoE+
- 2-port 10/100/1000BASE-T RJ45 with 24/48V Passive PoE (BSP-115HP-5A)
- Up to 65/120-watts PoE budget
- MPPT Charge Controller
- Supports Lithium, Lithium Iron Phosphate and Lead-acid Battery



Industrial PoE Injectors & Splitters

IPOE-162

- 10/100/1000BASE-T
- Distance up to 100m with 30W power output
- -40 to 75 degrees C wide operating temperature
- 12-48V DC redundant power
- IP30 metal case



IPOE-162S

- 10/100/1000BASE-T
- 12/24V DC power output by DIP switch
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



IPOE-171-60W/IPOE-171-95W

- 10/100/1000BASE-T
- Distance up to 100m with 60W power output (IPOE-171-60W)
- Distance up to 100m with 95W power output (IPOE-171-95W)
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



IPOE-176

- 100/1G/2.5G/5G/10GBASE-T
- Distance up to 60m with 95W power output
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



IPOE-173S

- Compliant with 802.3bt PoE++ PD
- 10/100/1000BASE-T
- 12/19/24V DC power output by DIP switch
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



IPOE-176S

- Compliant with 802.3bt PoE++ PD
- 100/1G/2.5G/5G/10GBASE-T
- 12/19/24V DC power output by DIP switch
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



IPOE-175

- Up to 60 watts of PoE power on 4-pair UTP
- Data and power over one Ethernet cable up to 100 meters
- IP67 and IK10-rated aluminum case
- -40 to 75 degrees C wide operating temperature
- 24-56V DC to 55V power boost technology



IPOE-175S

- Supports 12V DC, 60-watt power output
- IP67 and IK10-rated aluminum case
- -40 to 75 degrees C wide operating temperature
- Compliant with IEEE 802.3bt PoE++ PD
- Supports 10/100/1G applications



IPOE-260/IPOE-260-12V

- 10/100/1000BASE-T "Data" input port x 2
- 10/100/1000BASE-T "Data + Power" output port x 2
- -40 to 75 degrees C operating temperature
- IP30 metal case, DIN-rail and wall-mountable



IPOE-270/IPOE-270-12V

- 10/100/1G/2.5G/5GBASE-T "Data" input port x 2
- 10/100/1G/2.5G/5GBASE-T "Data + Power" output port x 2
- Up to 90-watt of PoE power on 4-pair UTP
- 180-watt PoE budget
- -40 to 75 degrees C wide operating temperature
- IP30 metal case, DIN-rail and wall-mountable



IPOE-470/IPOE-470-12V

- 10/100/1G/2.5GBASE-T "Data" input port x 4
- 10/100/1G/2.5GBASE-T "Data + Power" output port x 4
- Up to 95-watt of PoE power on 4-pair UTP
- 240-watt PoE budget
- -40 to 75 degrees C wide operating temperature
- IP30 metal case, DIN-rail and wall-mountable



Industrial PoE Media Converters

PLANET Industrial PoE Media Converter series combines Ethernet media conversion (from 1000BASE-X to 10/100/1000BASE-T) with 802.3at PoE+ injector delivered in an IP30 rugged strong case. With data and power over Ethernet from one unit, the Industrial PoE Media Converter series can reduce cable deployment and eliminate the need for dedicated electrical outlets on the wall, ceiling or any unreachable place.

IGTP-802T/IGTP-802TS

- 1-port 10/100/1000BASE-T 802.3at PoE+
- 1-port 1000BASE-SX multi-mode, 220/550 meters (IGTP-802T)
- 1-port 1000BASE-LX single mode, 10km (IGTP-802TS)
- -40 to 75 degrees C wide operating temperature
- IP30 metal case
- 12~48V DC redundant power

Power Boost



IGTP-805AT/IGTP-815AT

- 1-port 10/100/1000BASE-T 802.3at PoE+
- 1-port 100/1000BASE-X SFP
- -40 to 75 degrees C wide operating temperature
- Compact IP30 metal case
- 12~48V DC power input (IGTP-805AT)
- 48~54V DC power input (IGTP-815AT)

Compact size



IGTP-825AT

- 1-port 10/100/1000BASE-T 802.3at PoE+
- 1-port 1000BASE-X SFP
- Up to 30 watts of PoE power on UTP
- IP67 and IK10-rated aluminum case
- -40 to 75 degrees C wide operating temperature
- 24~56V DC to 54V power boost technology

Power Boost

IP67



IGTP-2205AT

- 2-port 10/100/1000BASE-T 802.3at PoE+
- 2-port 100/1000BASE-X SFP
- -40 to 75 degrees C wide operating temperature
- Compact IP30 metal case
- 48~54V DC power input

Compact size



IGUP-805AT

- 1-port 10/100/1000BASE-T 802.3bt PoE++ type-4 PSE
- 1-port 100/1000BASE-X SFP
- -40 to 75 degrees C wide operating temperature
- 12~54V DC redundant power
- DIP switch for 802.3bt/PoH/Force mode control
- DIP switch for Link Fault Passthrough PoE control

Power Boost

802.3bt
95W

LFPP



IGUP-1205AT/IGUP-2205AT

- 1-/2-port 10/100/1000BASE-T 802.3bt PoE++ type-4 PSE
- 2-port 100/1000BASE-X SFP
- -40 to 75 degrees C wide operating temperature
- 12~54V DC redundant power
- 90W/180W PoE budget
- DIP switch for 802.3bt/Legacy/Force mode control

Power Boost

802.3bt
95W



Industrial Fiber over Ethernet Media Converters

PLANET Industrial Fiber over Ethernet Media Converter Solution is designed to withstand extreme temperatures to ensure stable operations in harsh industrial conditions. It also provides the dynamic status report and real-time alarm messages that make monitoring and managing the entire industrial networks easy.

PLANET provides the Industrial Media Converters with various fiber-optic interfaces to convert signals via 10G, Gigabit, and Fast Ethernet ports.

- IXT series – allows the signal to convert between fiber-optic interface and 10G port
- IGT series – allows the signal to convert between fiber-optic interface and Gigabit Ethernet port
- IFT series – allows the signal to convert between fiber-optic interface and Fast Ethernet port

Industrial 10GBASE-X Fiber over Ethernet Media Converters

IXT-900-1X1T

- 1-port 100/1G/2.5G/5G/10GBASE-T RJ45
- 1-port 100/1G/2.5G/10GBASE-X SFP+ slot
- IEEE 802.1Q VLAN and IEEE 802.1ad Q-in-Q VLAN mode
- Supports ITU-G.8032 ERPS
- QoS supports IP TOS/DSCP/IP Precedence
- PLANET NMS system and CloudViewerPro for remote management



IXT-900-2X

- 2-port 100/1G/2.5G/10GBASE-X SFP+ slot
- IEEE 802.1Q VLAN and IEEE 802.1ad Q-in-Q VLAN mode
- Supports ITU-G.8032 ERPS
- QoS supports IP TOS/DSCP/IP Precedence
- PLANET NMS system and CloudViewerPro for remote management



IXT-900-2X1T

- 1-port 100/1G/2.5G/5G/10GBASE-T RJ45
- 2-port 100/1G/2.5G/10GBASE-X SFP+ slot
- IEEE 802.1Q VLAN and IEEE 802.1ad Q-in-Q VLAN mode
- Supports ITU-G.8032 ERPS
- QoS supports IP TOS/DSCP/IP Precedence
- PLANET NMS system and CloudViewerPro for remote management



Industrial 10GBASE-X Fiber over Ethernet Media Converters

IXT-900-2X1PD

- 1-port 100/1G/2.5G/5G/10GBASE-T RJ45 with optional PoE input support
- 2-port 100/1G/2.5G/10GBASE-X SFP+ slot
- IEEE 802.1Q VLAN and IEEE 802.1ad Q-in-Q VLAN mode
- Supports ITU-G.8032 ERPS
- QoS supports IP TOS/DSCP/IP Precedence
- PLANET NMS system and CloudViewerPro for remote management

PoE PD



IXT-900-2X1UP

- 1-port 100/1G/2.5G/5G/10GBASE-T RJ45
- 2-port 100/1G/2.5G/10GBASE-X SFP+ slot
- IEEE 802.1Q VLAN and IEEE 802.1ad Q-in-Q VLAN mode
- Supports ITU-G.8032 ERPS
- QoS supports IP TOS/DSCP/IP Precedence
- PLANET NMS system and CloudViewerPro for remote management

802.3bt PoE++



IXT-900-1X1UP

- 1-port 100/1G/2.5G/5G/10GBASE-T RJ45
- 1-port 100/1G/2.5G/10GBASE-X SFP+ slot
- IEEE 802.1Q VLAN and IEEE 802.1ad Q-in-Q VLAN mode
- Supports ITU-G.8032 ERPS
- QoS supports IP TOS/DSCP/IP Precedence
- PLANET NMS system and CloudViewerPro for remote management

802.3bt PoE++



IXT-705AT

- Complies with IEEE 802.3ae 10GBASE-R
- NBASE-T featuring adaptive rate operation
- 100 meters over Cat 6A at 10Gbps
- -40 to 75 degrees C wide operating temperature
- IP30 metal case
- Low power consumption

10G RJ45

NBASE-T



IXT-815AT

- 2-port 100/1G/2.5G/10GBASE-X SFP+ slot
- 10Gbps XGSPON/2.5Gbps GPON fiber-optic networking to 10Gbps Ethernet fiber-optic networking.
- -40~75 degrees C wide operating temperature
- 9~48V DC redundant power
- Compact IP30 metal case

10Gbps SFP+

Compact size



Industrial 1000BASE-X Fiber over Ethernet Media Converters

IGT-900-1T1S

- 1-port 10/100/1000BASE-T
- 1-port 100/1G/2.5GBASE-X SFP
- 9~48V DC redundant power design
- -40 to 75 degrees C operating temperature
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS Ring and Loop protection supported
- IPv6/IPv4 Web/TLS; Telnet/SSHv2; SNMPv1/v2c/v3 management

2.5G SFP

Cyber Security



IGT-900-2T2S

- 2-port 10/100/1000BASE-T
- 2-port 100/1G/2.5GBASE-X SFP
- 9~48V DC redundant power design
- -40 to 75 degrees C operating temperature
- 802.1Q VLAN, MSTP and IGMP snooping
- ERPS Ring and Loop protection supported
- IPv6/IPv4 Web/TLS; Telnet/SSHv2; SNMPv1/v2c/v3 management

2.5G SFP

Cyber Security



IGT-805AT

- 1-port 100/1000BASE-X SFP fiber optic
- 1-port 10/100/1000BASE-T
- 12~48V DC redundant power
- -40 to 75 degrees C operating temperature
- IP30 metal case



IGT-815AT

- 1-port 100/1000BASE-X SFP fiber optic
- 1-port 10/100/1000BASE-T
- 12~48V DC redundant power
- -40 to 75 degrees C operating temperature
- IP30 metal case



IGT-1205AT

- 2-port 100/1G/2.5GBASE-X SFP fiber optic
- 1-port 10/100/1000BASE-T
- 12~48V DC redundant power
- -40 to 75 degrees C operating temperature
- IP30 metal case



IGT-2205AT/IGT-2205AT-E

- 2-port 100/1G/2.5GBASE-X SFP fiber optic
- 2-port 10/100/1000BASE-T
- 12~48V DC redundant power
- -40 to 75 degrees C operating temperature
- IP30 metal case (IGT-2205AT)
- IP40 metal case (IGT-2205AT-E)
- Compact size (IGT-2205AT-E)



Industrial 100BASE-FX Fiber over Ethernet Media Converters

IFT-802T

- 1-port 100BASE-FX SC multi-mode, 2km fiber optic
- 1-port 10/100BASE-TX
- 12~48V DC redundant power
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



IFT-802TS15

- 1-port 100BASE-FX SC single mode, 15km fiber optic
- 1-port 10/100BASE-TX
- 12~48V DC redundant power
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



IFT-805AT

- 1-port 100BASE-FX SFP fiber optic
- 1-port 10/100BASE-TX
- 12~48V DC redundant power
- -40 to 75 degrees C wide operating temperature
- IP30 metal case



Industrial Cellular Gateway

ICG-2515-NR/ICG-2515F-NR

- Global 5G NR (NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- 4 10/100/1000T LAN ports and 1 10/100/1000T WAN port
- 2 DI/DO ports and 1 serial port (RS485) for Modbus applications
- Easy management (Setup Wizard, DHCP Server and Dashboard)
- Full security with VLAN, NAT, DMZ, routing, firewall and IP/MAC/port filtering
- -45 to 75 degrees C operating temperature, DIN-rail and fanless design
- 1 1000 BASE-X SFP WAN/LAN port for long distance extensor (ICG-2515F-NR)



ICG-2515W-NR/ICG-2515FW-NR

- Global 5G NR (NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- 4 10/100/1000T LAN ports and 1 10/100/1000T WAN port
- 802.11ax 1800AX dual band WiFi
- 2 DI/DO ports and 1 serial port (RS485) for Modbus applications
- Full security with VLAN, NAT, DMZ, routing, firewall and IP/MAC/port filtering
- -45 to 75 degrees C operating temperature, DIN-rail and fanless design
- 1 1000 BASE-X SFP WAN/LAN port for long distance extensor (ICG-2515FW-NR)



VCG-2406WP-NR

- Global 5G NR (NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- 3 10/100/1000T M12 LAN ports with 2-port 802.3at PoE+ injector and 1 10/100/1000T M12 WAN port
- 802.11ax 1800Mbps dual-band WiFi
- Dual 9~54V DC redundant power input
- 1 DI/DO ports and 1 serial port (RS485) for Modbus applications
- Full security with VLAN, NAT, DMZ, routing, firewall and IP/MAC/port filtering
- -45 to 75 degrees C operating temperature, fanless design




ICG-2210W-NR

- 5G NR(NSA/SA)/4G LTE network with dual micro-SIM design for cellular network redundancy
- Multi VPN with IPSec, OpenVPN, PPTP, L2TP, GRE
- Full security with Cybersecurity, VLAN, NAT, DMZ, and IP/MAC/Port filtering
- Stateful Packet Inspection (SPI) firewall and content filtering
- IP30 Metal and compact design
- -40 to 75 degrees C operating temperature



FWA-2100-NR

- 5G NR(NSA/SA)/4G LTE network with dual nano-SIM design for cellular network redundancy
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP)
- Full security with Cybersecurity, DMZ, and IP/MAC/Port filtering
- Stateful Packet Inspection (SPI) firewall and content filtering
- -20 to 60 degrees C operating temperature
- IP68 rating waterproof

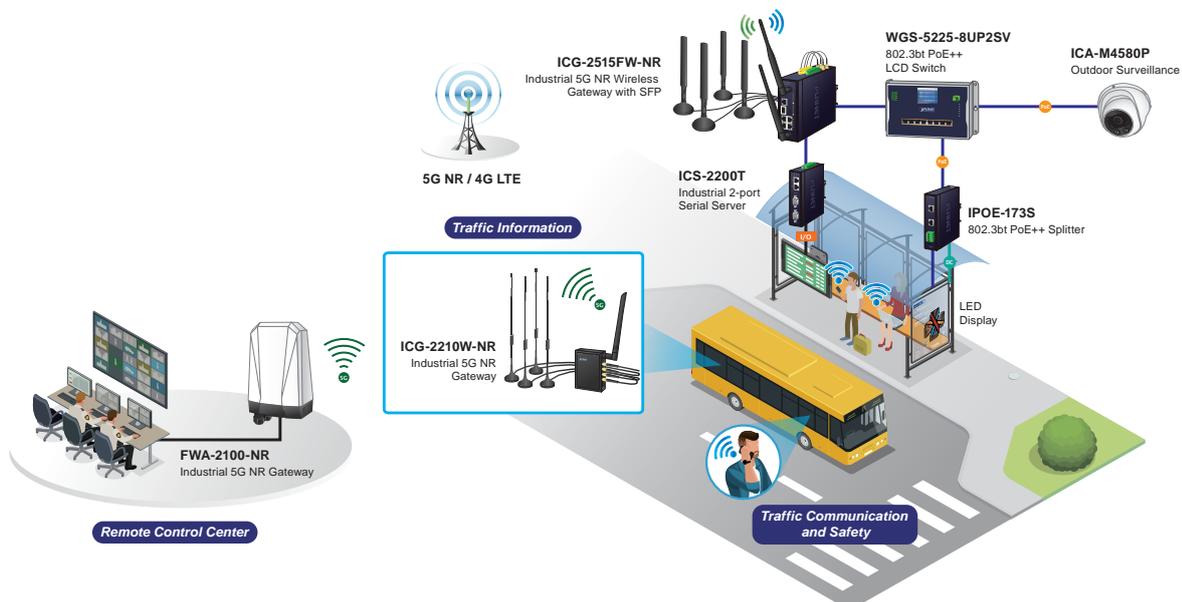

Industrial Cellular Gateway

ICG-2510W-LTE

- 5-port Gigabit Ethernet, build in redundancy protocol-VRRP
- 2 DI/DO and 1 serial port (RS232 or RS485) for Modbus applications
- Dual module SIM for network load balancing and redundancy
- WiFi compliance IEEE 802.11b/g/n/ac dual-band for mobile client connectivity
- Multiple VPN with IPSEC, OpenVPN, PPTP, L2TP, GRE and VPN Failover
- Full security with VLAN, NAT, DMZ, Static routing, Firewall and IP/MAC/Port filtering
- Supports CMS for remote management
- -35 to 70 degrees C operating temperature and fanless design



ICG-2510WG-LTE

- 5-port Gigabit Ethernet, build in redundancy protocol-VRRP
- 2 DI/DO and 1 serial port (RS232 or RS485) for Modbus applications
- Dual module SIM for network load balancing and redundancy
- WiFi compliance IEEE 802.11b/g/n/ac dual-band for mobile client connectivity
- GPS antenna allows to detect the location via sat nav system
- Multiple VPN with IPSEC, OpenVPN, PPTP, L2TP, GRE and VPN Failover
- Full security with VLAN, NAT, DMZ, Static routing, Firewall and IP/MAC/Port filtering
- Supports CMS for remote management
- -35 to 70 degrees C operating temperature and fanless design



Vehicle 4G LTE Cellular Wireless Gateway

VCG-1500WG-LTE

- 4 10/100TX LAN ports and 1 10/100TX WAN port
- Industrial power with wide DC voltage power supply design
- One SIM slot and one 4G LTE antenna for network connection
- Supports Wi-Fi 802.11 b/g/n for mobile client connectivity
- GPS antenna allows to detect the location via sat nav system
- Supports GRE, PPTP, IPsec and L2TP
- Supports NAT, DMZ, MAC/Application/IP filter and static routing
- Supports DHCP server/client, PPPoE, static IP and DDNS
- -25 to 65 degrees C operating temperature
- Supports CMS and SNMP for remote management



DIN-rail Power Supplies



PWR-40-24/PWR-60-24

- 100~240V AC, 50/60Hz, 1.1A input voltage
- Power output 40 watts/60 watts, 24V, 1.7A, 2.5A
- DIN rail TS-35/7.5 or 15
- -20~70 degrees C operating temperature



PWR-120-48

- 100~240V AC, 50/60Hz, 2.25A input voltage
- Power output 120 watts, 48V, 2.5A
- DIN rail TS-35/7.5 or 15
- -40~70 degrees C operating temperature



PWR-75-48

- 100~240V AC, 50/60Hz, 1.45A input voltage
- Power output 75 watts, 48V, 1.6A
- DIN rail TS-35/7.5 or 15
- -40~70 degrees C operating temperature



PWR-480-48

- 100~240V AC, 50/60Hz, 4.8A input voltage
- Power output 480 watts, 48V, 10A
- DIN rail TS-35/7.5 or 15
- -40~70 degrees C operating temperature



PWR-240-48

- 100~240V AC, 50/60Hz, 2.5A input voltage
- Power output 240 watts, 48V, 5A
- DIN rail TS-35/7.5 or 15
- -40~70 degrees C operating temperature



PWR-960-48

- Input Voltage: 200~240V AC, 50/60Hz, 6A
- Power output: 960 watts, 48V, 20A
- DIN- rail TS-35/7.5 or 15
- -40~70 C operating temperature



PWR-75-24

- 100~240V AC, 50/60Hz, 2A input voltage
- Power output 75 watts, 24V, 3.2A
- DIN rail TS-35/7.5 or 15
- -40~70 degrees C operating temperature

Industrial Automation



Industrial Automation Realizing Connectivity to the IoT



RS232



Modbus RTU/ASCII

EtherCAT®



RS485/RS422




Web Management



Modbus TCP

Realizing Connectivity to the IoT

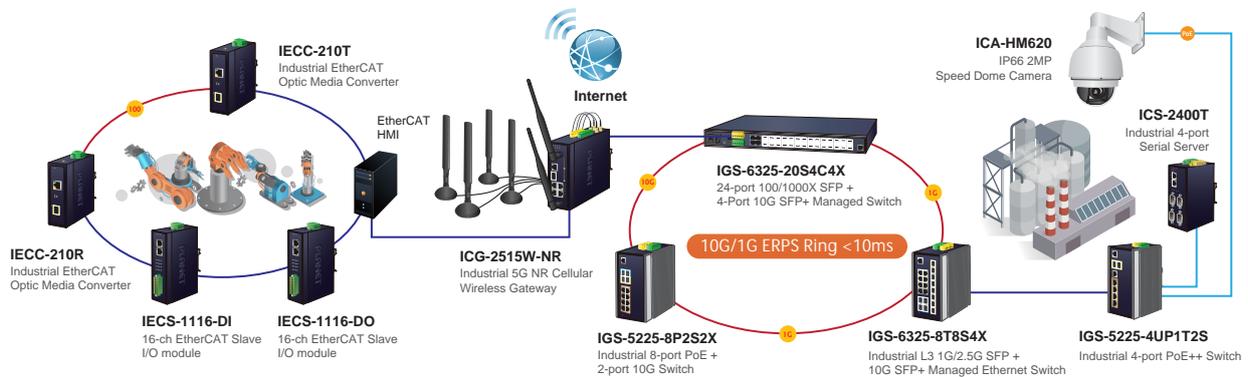

Remote Management



Industrial RS232, RS422, RS485 Serial over Ethernet Bridging Legacy to Industrial IoT

PLANET ICS Serial Device Server Series is specially designed to convert RS232, RS422 or RS485 serial communication to IoT and TCP/IP networking. It makes the connected legacy serial devices become IP-based facilities and is able to connect to the industrial Ethernet network allowing serial and Ethernet communications to connect efficiently and inexpensively. The ICS Series is a time-saving and cost-effective solution with no need of replacing the existing serial equipment and software system.



Modbus TCP Enables Flexible Network

With the supported Modbus TCP/IP protocol, PLANET Modbus TCP Ethernet Switches can easily integrate with SCADA systems, HMI systems and other data acquisition systems in factory floors. It enables administrators to remotely monitor the industrial Ethernet switch's operating information, port information and communication status, thus achieving enhanced monitoring and maintenance of the entire factory.

Powering the Digital Transformation with EtherCAT

PLANET IECS Series is industrial EtherCAT slave I/O modules equipped with the EtherCAT protocol for today's distributed industrial applications which provides high-density digital input/output channels and is protected with 3750V DC isolation. Its compact size and DIN-rail mounting make installation in a cabinet easy and pluggable terminal blocks and LED indicator help users to maintain and set up their system.



EtherCAT 

Industrial RS232/RS485/RS422 over Ethernet Media Converters

PLANET Layer 2 Industrial Serial over Ethernet, with model names starting with ICS series, mean the signal converts between RS232/485/422 interface and Ethernet port or fiber-optic port. It also provides the dynamic status report and real-time alarm messages that are easy to monitor and manage the entire industrial networks.

ICS-3100T/ICS-3105AT

- 1 RS232 with DB9 interface
- 1 RS422 or RS485 with terminal block interface
- Choice of fiber-connector from SC/LC, multi-mode/single mode fiber
- Built-in IP-based Web interface and Telnet interface
- Several serial operating modes
- MQTT and SSL encryption
- Edge computing



ICS-3200T/ICS-3400T

- 2-port 10/100BASE-TX
- 2 or 4 RS232/RS422/RS485 with DB9
- 12~48V DC redundant power
- IP30 metal case
- MQTT and SSL encryption
- Edge computing




ICS-2105AT/ICS-2102T/ICS-2102TS

- 1 RS232 with DB9 interface
- 1 RS422 or RS485 with terminal block interface
- Choice of fiber-connector from SC/LC, multi-mode/single mode fiber
- Built-in IP-based Web interface and Telnet interface
- Several serial operating modes



ICS-2100T

- 1-port 10/100BASE-TX
- 1 RS232 with DB9 interface
- 1 RS422 or RS485 with terminal block interface
- Built-in IP-based Web interface and Telnet interface
- Data modes include VCOM, RFC2217, TCP Server, TCP Client, UDP, Remote Pair Serial Telnet and Modbus converter



ICS-2200T / ICS-2400T

- 2-port 10/100BASE-TX
- 2 or 4 RS232/RS422/RS485 with DB9
- Data modes include VCOM, RFC2217, TCP Server, TCP Client, UDP, Remote Pair Serial Telnet and Modbus converter
- 12~48V DC redundant power
- IP30/IP40 metal case



ICS-110/ICS-115A/ICS-120

- Serial RS232/422/485 over IP Ethernet Solution
- Asynchronous serial data rate up to 921kbps
- Data modes include VCOM, RFC2217, TCP Server, TCP Client, UDP, Remote Pair Serial Telnet and Modbus converter
- IPv4/IPv6 Web and telnet remote management
- -10~60 degrees C operating temperature



HaLow RS232/RS485/DI/DO Node Controller

HLB-1150

- Ultra-wide-distance transmission up to 1km with line of sight
- Industrial metal case IP30 design with -20°~60°C temperature range
- Easy to connect with multiple wired Modbus sensors through RS485 interfaces
- 6 DI/ 2 DO interfaces for operating application
- Compliant with the IEEE 802.11ah standard (Wi-Fi HaLow)



Industrial RS422/RS485 Modbus Gateway

To fulfill the demand of automation and data exchange for industrial 4.0 infrastructures, PLANET IMG serial Modbus Gateway can act as a conversion bridge between the industrial equipment with the Modbus RTU/ASCII Protocol and the administrator workstations that run the Modbus TCP/IP Protocol.

IMG-3100T/IMG-3105AT

- 1-port 10/100BASE-TX (IMG-3100T)
- 1-port 100BASE-FX SFP slot (IMG-3105AT)
- 1 RS232 with DB9 interface
- 1 RS422 or RS485 with terminal block interface
- RTU Master/Slave, ASCII Master/Slave
- Built-in IP-based Web interface and telnet interface
- MQTT and SSL encryption
- Edge computing




IMG-3200T/IMG-3400T

- 2-port 10/100BASE-TX
- 2 or 4 RS232/RS422/RS485 with DB9 interface
- Built-in IP-based Web interface and telnet interface for remote management
- RTU Master/Slave, ASCII Master/Slave
- 12 to 48V DC, redundant power design
- MQTT and SSL encryption
- Edge computing




IMG-2100T/IMG-2105AT/IMG-2102T/IMG-2102TS

- 1-port 10/100BASE-TX (IMG-2100T)
- 1 Choice of fiber-connector from SC/LC, multi-mode/single mode fiber
- 1 RS232 with DB9 interface
- 1 RS422 or RS485 with terminal block interface
- RTU Master/Slave, ASCII Master/Slave
- Built-in IP-based Web interface and telnet interface



IMG-2200T / IMG-2400T

- 2-port 10/100BASE-TX
- 2 or 4 RS232/RS422/RS485 with DB9 interface
- Built-in IP-based Web interface and telnet interface for remote management
- RTU Master/Slave, ASCII Master/Slave
- 12 to 48V DC, redundant power design



Industrial EtherCAT Slave IO Module

IECS-1116-DI

- Built-in isolated 16 digital inputs
- 2 x RJ45 bus interface
- LED indicators for the input status
- Removable terminal block connector
- Distance between stations up to 100m (100BASE-TX)
- EtherCAT conformance test tool verified



IECS-1116-DO

- Built-in isolated 16 digital outputs
- 2 x RJ45 bus interface
- LED indicators for the output status
- Removable terminal block connector
- Distance between stations up to 100m (100BASE-TX)
- EtherCAT conformance test tool verified



IECC-210-KIT

- 100BASE-FX SFP interface for extended distance
- With power redundancy
- Compact size and DIN-rail or Wall Mounting
- Wide input voltage range (9 ~ 48V DC)
- EtherCAT Distributed Clock (DC) mode
- EtherCAT conformance test tool verified



IECJ-300/400/410FT

- Multi 100BASE-TX RJ45 bus interfaces
- Three 100BASE-TX RJ45 bus interfaces and one 100BASEFX SFP interface
- Dual 9 ~ 48V DC wide input voltage range
- -40 to 75 degrees C operating temperature
- Compact size, DIN-rail mounting and wall mounting
- EtherCAT Distributed Clock (DC) mode
- EtherCAT conformance test tool verified



Comprehensive AIoT Solution



AI Intelligent Energy and Environment Management Solution

- LoRaWAN
- Dual WAN
- ESG Energy Monitoring
- Redundant Power
- Wide Temperature
- Modbus
- VPN
- HaLow

Energy Management Solution



AI-Driven Wide-Area, Energy-Efficient AIoT with LoRa & Wi-Fi HaLow

PLANET AIoT Solution integrates LoRaWAN and Wi-Fi HaLow technologies to deliver ultra-long-range, low-power, and highly reliable wireless connectivity for large-scale and distributed IoT deployments.

Powered by the AI-enabled NMS-AIoT Application Server, PLANET applies AI models to energy and sensor data for consumption forecasting, trend analysis, anomaly detection with real-time alert notifications, and optimization insights. By transforming massive IoT data into actionable intelligence, PLANET helps organizations improve energy efficiency, simplify IoT data management, and build scalable, future-ready AIoT networks.

AIoT Application Server

NMS-AIoT

- A unified platform integrating LoRa, Wi-Fi, HaLow, Modbus and more
- ESG energy management reporting with real-time sensor data analysis and carbon footprint reduction
- Support integration with versatile IoT devices
- Intuitive smart dashboard
- Real-time environmental monitoring and analysis
- Precise device location mapping
- 24/7 real-time event notifications
- Early error detection and anomaly resolution
- Support for future software upgrades
- Support for private and PLANET cloud platforms



Industrial LoRaWAN Gateway for 300 Nodes

LCG-300-NR

- 8 programmable parallel demodulation paths
- Supports Frequency Band EU868/US915/AS923 MHz Sub 1G
- Web UI for LoRa and network configuration
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- DC 9 to 54V redundant power; -40 to 75 degrees C operating temperature
- IP30 metal case with DIN-rail or wall-mount design
- Global 5G NR (NSA/SA) / 4G LTE network for cellular network connection



LCG-300/LCG-300W

- 8 programmable parallel demodulation paths
- Supports Frequency Band EU868/US915/AS923 MHz Sub 1G
- Web UI for LoRa and network configuration
- Concurrent dual-band connectivity in 2.4GHz (600Mbps) and 5GHz (1200Mbps)(LCG-300W)
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- DC 9 to 54V redundant power; -40 to 75 degrees C operating temperature
- IP30 metal case with DIN-rail or wall-mount design



LCG-350W-NR

- 8 programmable parallel demodulation paths
- Supports Frequency Band EU868/US915/AS923 MHz Sub 1G
- Web UI for LoRa and network configuration
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- AC 100 to 277V and/or PoE Power Supply
- IP67 rating waterproof
- -40 to 75 degrees C operating temperature
- Support 5G NR (NSA/SA) / 4G LTE network for cellular network connection



LoRa Node Controller

LN1130

- Ultra-wide-distance transmission up to 10km with line of sight
- Easy to connect with multiple wired sensors through RS232/RS485 interface
- Triggers multiple conditions and actions
- Compliant with standard LoRaWAN gateways and network servers
- 9 to 48V DC power with reverse polarity protection (AC 24V power adapter acceptable)
- Industrial metal case IP30 design with wide -40 ~ 75°C operating temperature range



LN1140

- Ultra-wide-distance transmission up to 10km with line of sight
- 2 DI/DO interfaces each for operating application
- Triggers multiple conditions and actions
- Compliant with standard LoRaWAN gateways and network servers
- 9 to 48V DC power with reverse polarity protection (AC 24V power adapter acceptable)
- Industrial metal case IP30 design with wide -40 ~ 75°C operating temperature range



LN502

- Ultra-wide-distance transmission up to 10km with line of sight
- Easy to connect with multiple wired sensors through RS485 / RS232
- Two DI and DO interfaces
- 3.3V/5V DC Output for Emergency Power Use
- Triggers multiple conditions and actions
- Compliant with standard LoRaWAN gateways and network servers
- Sustainably powered by a solar-charged battery for continuous operation or 9 to 48 DC power supply.
- IP67 rating
- Supports Frequency Band EU868/US915/AS923 MHz Sub 1G



LoRa Sensor

LoRa sensor devices serve a myriad of purposes, including flood detection, temperature and humidity monitoring, PIR motion sensing, and more. Leveraging the LoRaWAN protocol, these devices ensure long-range wireless communication in IoT applications. Their notable benefits include extended battery life due to low power consumption. Widely applied in scenarios such as smart agriculture, industrial monitoring, and asset tracking, LoRa sensors offer a cost-effective and reliable solution for collecting and transmitting data over considerable distances, making them invaluable in diverse environmental and operational contexts.

LS100 series



LS100-WL

- Water Leak Sensor
- IP65 rating
- LoRaWAN™ Class A compatible



LS100-PIR

- Indoor Occupancy Sensor (Occupancy/Light/Temperature)
- IP30 rating
- LoRaWAN™ Class A compatible



LS100-DW

- Door and Window Contact Sensor
- IP30 rating
- LoRaWAN™ Class A compatible



LS100-CO/LS100-SMK

- CO Sensor/Smoke Detector
- IP20 rating
- LoRaWAN™ Class A compatible

LS200 series



LS200-TH

- Indoor Temperature and Humidity Sensor (-20~55 degrees C)
- IP65 rating
- LoRaWAN™ Class A compatible



LS200-PT

- Machine Temperature Sensor with Thermocouple (-70~200 degrees C)
- IP65 rating
- LoRaWAN™ Class A compatible



LS200-TC

- Machine Temperature Sensor with Thermocouple (-40~125 degrees C)
- IP65 rating
- LoRaWAN™ Class A compatible



LS200-RF

- Refrigerator Temperature and Humidity Sensor (-40~55 degrees C)
- IP65 rating
- LoRaWAN™ Class A compatible

LS200 series



LS200-CM3

- 3-phase Current Meter with Clamp-On CT
- Measure 75A current maximum
- IP53 rating
- LoRaWAN™ Class A compatible



LS200-LG

- Light Level Sensor
- IP65 rating
- LoRaWAN™ Class A compatible



LS200-VOC

- TVOC Sensor
- IP65 rating
- LoRaWAN™ Class A compatible



LS200-PM25

- PM2.5 Sensor
- IP30 rating
- LoRaWAN™ Class A compatible



LS200-MF8

- Temperature/Humidity/PIR/Tilt/Vibration/Reed Switch/Light/Glass Break Sensor
- IP30 rating
- LoRaWAN™ Class A compatible



LS250-PLUG

- Light Level Sensor
- IP20 rating
- LoRaWAN™ Class C compatible

HaLow Wi-Fi Bridge and Station Controller

Wi-Fi HaLow (802.11ah) delivers long-range, low-power wireless connectivity for IoT applications such as smart agriculture, industrial monitoring, utilities, and wide-area sensor networks. PLANET's HLB-100 and HLB-1150 build on these advantages by offering kilometer-level wireless bridging, robust Gateway, AP and Station operation, and seamless integration with Modbus sensors and industrial interfaces. The HLB-100 provides a compact HaLow bridge for essential long-distance links, while the HLB-1150 enhances functionality with RS485/RS232, digital I/O, and advanced control capability—making both ideal for building reliable, wide-area IoT infrastructures.

HLB-100

- IEEE 802.11ah Wi-Fi HaLow compliant for long-range, low-power IoT connectivity
- Supports EU868 and US915 frequency bands
- Provides long-range wireless transmission up to 1 km (line-of-sight)
- Supports Gateway, Access Point and Station mode
- Equipped with one 10/100BASE-T RJ45 Ethernet port
- Easy to connect with multiple wired Modbus sensors through RS485 interface
- Industrial-grade IP30 metal housing with -20°C to 60°C operating temperature



HLB-1150

- IEEE 802.11ah Wi-Fi HaLow compliant for long-range, low-power IoT connectivity
- Supports EU868 and US915 frequency bands
- Offers long-range wireless transmission up to 1 km (line-of-sight)
- Equipped with one 10/100BASE-T RJ45 Ethernet port
- Connects easily with multiple wired sensors via RS485 and RS232 interfaces
- Provides 6 DI / 2 DO for versatile control and automation applications
- Industrial-grade IP30 metal housing with -40°C to 75°C operating temperature



Power over Ethernet



Comprehensive Intelligent 802.3bt PoE++ Solution for High-Power Networking



Touch Color LCD



2.5G/10Gbps PoE




Intelligent PoE Management



10G Uplink

Unique Intelligent PoE Management for Power Savings

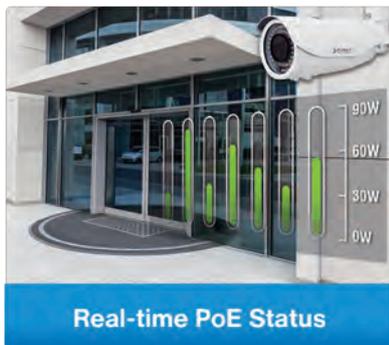

Real-time PoE Status



PoE Schedule



PD Alive Check Remote and Surveillance



Enhanced Power Budget

PLANET PoE Solution provides full power budget to satisfy the increasing needs for power consumption of powered devices, such as wireless APs, IP phones, and IP cameras. Their IP-based, remote Web management interfaces also provide an effective central power management solution to monitor and control per port power feeding of deployed powered devices. PLANET PoE Solution with high power capability helps realize commercial-grade and industrial-grade network applications.

Intuitive Touch LCD for Smarter PoE Management

PLANET has introduced the world's first PoE Managed Switch series featuring an intuitive color touch LCD interface, enabling real-time network management without the need to log into a computer. This innovative design significantly enhances management efficiency by allowing seamless control of the network system, PoE PDs, and even cable diagnostics directly through the user-friendly touch panel integrated into the PoE switches. Additionally, these Color Touch LCD PoE switches offer 10G data transmission, high-power PoE ranging from IEEE 802.3af/at (30W) to ultra-power (60-95W), intelligent PoE functions, and unique ONVIF support—boosting network performance for SMEs, enterprises, public spaces, and industrial environments.



Uniquely Intelligent PoE Management for Power and Cost Saving

To help users easily manage PoE systems and end-span devices on-site, PLANET has developed a unique and user-friendly Intelligent PoE Management feature. This advanced function enables IT managers to enhance operational efficiency, reduce maintenance costs, and extend product lifespan.



PoE Intelligent Temperature Detection and Control function

automatically monitors both the environment and device temperature. If the device exceeds normal operating temperature, the system activates to prevent potential damage.



PoE Power Detection function

aids IT managers in improving efficiency by allowing them to monitor both the total power usage of all connected devices and the power consumption of each individual device. This function automatically activates to protect connected devices from damage.

Extending IP Network Transmission

For long-distance IP network transmission, PLANET network devices are integrated with wireless and wired technologies, such as Ethernet, fiber and coaxial cables, and Power over Ethernet.



Intelligent PoE Management Functions

Intelligent Powered Device Alive Check


PLANET PoE switches can be configured to monitor connected PD (Powered Device) status in real time via ping action. It will greatly enhance the network reliability through the PoE port resetting the PD's power source and reducing administrator management burden.

PoE PD Alive Check



PoE Schedule for Energy Saving

The "PoE schedule" function helps you to enable or disable PoE power feeding for each PoE port during specified time intervals and it is a powerful function to help SMBs or enterprises save power and money.

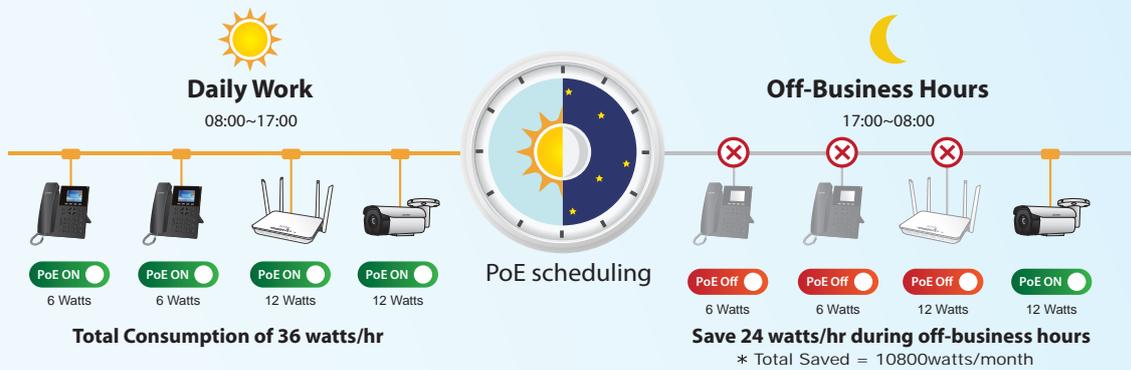


Scheduled Power Recycling

PLANET PoE switches allow each of the connected PoE IP cameras or PoE wireless access points to reboot at a specific time each week. Therefore, it will reduce the chance of IP camera or AP crash resulting from buffer overflow.


PoE Priority for Critical Service

The PoE power budget can be allocated by priorities or classification and sent alert event logs when power usage reaches the defined threshold.

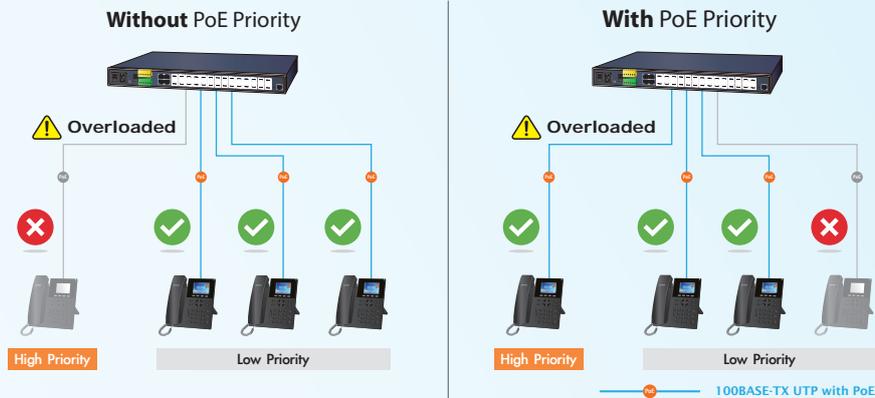


PoE Over Temperature Protection

The automatic Over Temperature Protection helps to prevent power budget overloading while the temperature rises.

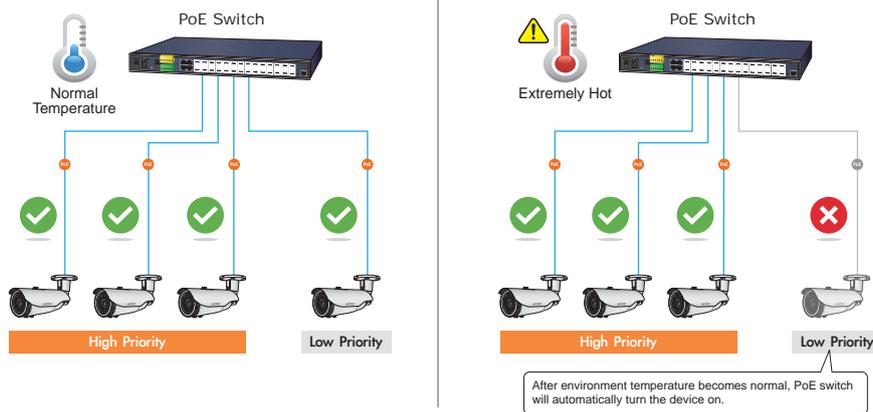

PoE Usage Monitoring

Via the power usage chart in the web management interface, PLANET PoE switches enable the administrator to monitor the status of the power usage of the connected PDs in real time.

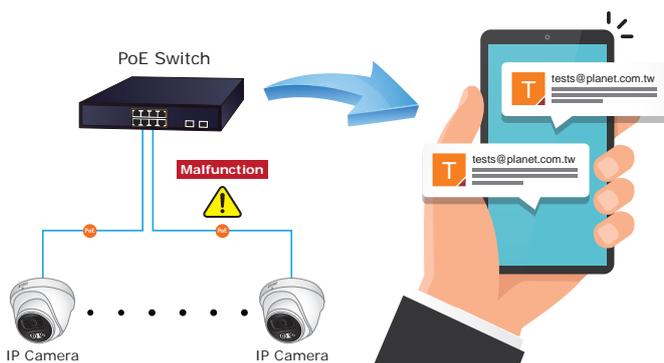

SMTP/SNMP Trap Event Alert

Though most NVR or camera management software offers SMTP email alert function, PLANET PoE Switches further provide event alert function to help to diagnose the abnormal device owing to whether or not there is a break of the network connection, loss of PoE power or the rebooting response by PD Alive Check process.

Layer 3 802.3at PoE+ Stackable Managed Switch



PLANET SGS PoE Series is a Layer 3 PoE Stackable Managed Gigabit Switch that provides high density performance, Layer 3 static routing, RIP (Routing Information Protocol) and OSPF (Open Shortest Path First). With the built-in SFP+ slots performing up to 216Gbps switching fabric, the SGS PoE Series can handle extremely large amounts of data in a secure topology linking to an enterprise backbone or high capacity servers. The powerful WRR (Weighted Round Robin) and Network Security features make the SGS PoE Series perform effective data traffic control for ISP and enterprise VoIP, video streaming, and multicast applications. The SGS PoE Series has 8/24/48 IEEE 802.3at PoE+ ports and PoE budget up to 120/370/740 watts for catering to medium-and large-scale VoIP or IP surveillance networks at a lower total cost.

- Complies with IEEE 802.3at Power over Ethernet Plus, end-span PSE
- Supports PoE power up to 30 watts for each PoE port
- Remote PoE Power management and monitoring
- IP routing protocol: IPv4/IPv6 Layer 3 Static Routing, RIP and OSPF
- Single IP address management, supporting up to 24 units stacked together (SGS-6341-24P4X)
- IEEE 802.1Q VLAN, Private VLAN, Q-in-Q and Voice VLAN
- Layer 2, 3 and 4 Access Control List
- Quality of Service (QoS)
- IEEE 802.1D/1w/1s Spanning Tree Protocol
- IGMP Snooping v1, v2 and v3, and querier mode
- Management interface – console; telnet; IPv6 and IPv4 Web; SNMP v1, v2c and v3; SSL and SSH

SGS-6341-24P4X/SGS-6341-24P6X

- 10/100/1000BASE-T with 802.3at PoE+ port x 24
- 100/1000BASE-X SFP port x 4, shared with Port-21 to Port-24 (SGS-6341-24P4X)
- 10GBASE-X SFP+ port x 4/6
- 370-watt PoE budget

SGS-6310-8P4X


- 10/100/1000BASE-T with 802.3at PoE+ port x 8
- 10GBASE-X SFP+ port x 4
- Max. 120-watt PoE budget

SGS-6310-24P4X

- 10/100/1000BASE-T with 802.3at PoE+ port x 24
- 10GBASE-X SFP+ port x 4
- Max. 370-watt PoE budget

SGS-6310-48P6XR

- 10/100/1000BASE-T with 802.3at PoE+ port x 48
- 10GBASE-X SFP+ port x 6
- Max 370-/740 -watt PoE budget
- 100-240V AC and 55V DC dual power input for maximum PoE budget

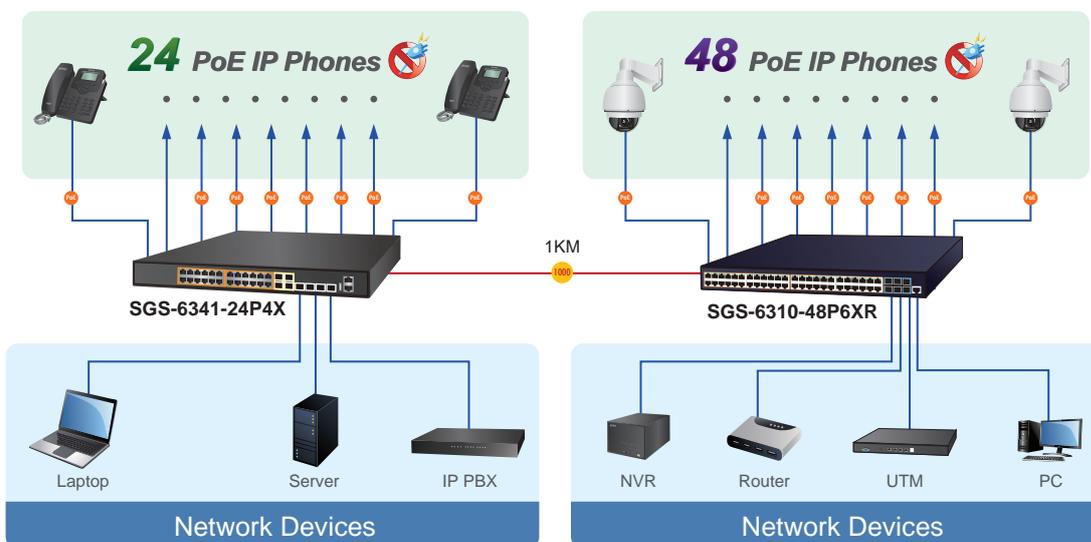

- 1000BASE-T UTP
- PoE 1000BASE-T UTP with PoE
- PoE 1000BASE-SX/LX Fiber-optic

Touch LCD 10G Layer 3 802.3at/bt PoE Managed Gigabit Switches



Intuitive LCD for Efficient Management

PLANET GS-6320-24UP2T2XV Smart LCD Layer 3 802.3at/bt PoE Managed Gigabit Switches provide an intuitive touch panel on their front panels that facilitate the Ethernet management and PoE PD management.

- IP address, VLAN and QoS configuration
- PoE management and status
- Port management and status/SFP information
- Troubleshooting: cable diagnostic and remote IP ping
- Maintenance: reboot, factory default and save configuration

The GS-6320-24UP2T2XV LCD PoE switch models featuring PLANET intelligent PoE management to improve the availability of critical business applications have an awesome feature -- ONVIF Support -- which is specifically designed for co-operating with Video IP Surveillances. From the GUI, you just need one click to search and show all of the ONVIF devices via network application, thus enabling to pinpoint the location of the particular surveillance device for easier inspection and planning.

GS-6320-24UP2T2XV

- 10/100/1000BASE-T with 802.3bt PoE++ port x 24
- 10GBASE-T copper port x 2
- 1G/2.5G/10GBASE-X SFP+ port x 2
- Max. 600-watt PoE budget
- Supports 100~240V AC/48~60V DC redundant power

95W



Extractive Power Supply Design to Increase Flexibility



Extractive Power Supply Design to Increase Flexibility

The GS-6322-24P4X/GS-6322-48UP4X is designed with two extractive power module slots to support Redundant Power Supply (RPS) mode or Extended Power Supply (EPS) mode via software setting to handle the demands of power redundancy or additional power for PoE++ ports as needed.

- RPS (1+1) mode: Where critical services are supported by PoE application, the secondary PSU is needed to provide backup power in the event of a power outage. When two PSUs are installed, the power budget is the same as that of one PSU.
- EPS (2+0) mode: Where more PoE budget is required to support complete application, the secondary PSU can provide additional PoE power. The two PSUs combined are able to provide a maximum of total PoE power.

The GS-6322-24P4X/GS-6322-48UP4X can work with three optional 920W/1200W/2000W AC power supplies. Its flexible redundant and extended power system is specifically designed for high- tech facilities requiring the highest power integrity.

GS-6322-24P4X

- 10/100/1000BASE-T with 802.3bt PoE++ port x 24
- 10GBASE-T copper port x 2
- 1G/2.5G/10GBASE-X SFP+ port x 2
- Dual power module slots
- EPS(2+0)/RPS(1+1) power management
- Up to 2,280-watt PoE budget

GS-6322-48UP4X

- 10/100/1000BASE-T with 802.3bt PoE++ port x 48
- 1G/2.5G/10GBASE-X SFP+ port x 4
- Dual power module slots
- EPS(2+0)/RPS(1+1) power management
- Up to 3,200-watt PoE budget



Dual Replaceable Power Module

10G L3 802.3bt PoE++ Managed Gigabit Switches



All-Port 10G L3 Managed Switch with an Exceptional 95W PoE++ Capability

PLANET XGS-6320-8UP4X Layer 3 10Gbps Ethernet PoE++ Switch is designed for high-bandwidth, power-intensive devices such as Wi-Fi 7/6E access points, thin clients, and AI-based surveillance systems that utilize uncompressed video. It provides versatile connectivity options with 10GBASE-T and 10GBASE-X SFP+ ports, enhancing network reach.

Each port supports up to 95W of PoE power, meeting IEEE 802.3bt Type 4 standards and providing a total 420W PoE budget. Featuring advanced data throughput, hardware-based Layer 3 routing, and efficient Layer 2 and Layer 4 switching, it integrates PLANET's (UNI- NMS) and CloudNMS, simplifying IPv6/IPv4 management for seamless control.

- All copper and SFP+ ports deliver pro-level 10Gbps speed for robust connectivity
- Supports PoE Power up to 95 watts for each PoE Port
- Implements ITU-T G.8032 Ethernet Ring Protection Switch (ERPS) for seamless network resilience
- Enhances cybersecurity with SSHv2, TLSv1.2 and SNMPv3, ensuring robust protection against cyber threats
- Cutting-edge support for 1588v2 PTP protocol transparent clock, ensuring precise network synchronization

XGS-6320-8UP4X

- 10GBASE-T 802.3bt PoE++ port x 8
- 10G/2.5G/1GBASE-X SFP+ port x 2
- Max. 400-watt PoE budget

GS-6311-24HP4X

- 10/100/1000BASE-T 802.3bt PoE++ port x 8
- 10/100/1000BASE-T 802.3at PoE++ port x 16
- 10G/1GBASE-X SFP+ port x 4
- Max. 480-watt PoE budget

10G L3 802.3at/802.3bt Managed Multigigabit Switches



The MGS-6311-8P2X is PLANET's first Multigigabit Layer 3 Managed Switch designed in compact size. Offering 8-port PoE 2.5GBASE-T and 2-port dual speed 10G SFP+, it breaks the bandwidth limitation of connecting the wireless network with the wired network. Featuring L3 routing and PLANET Intelligent PoE functions, it provides a highly-secure, environment-friendly network management and accelerates the deployment of wireless network infrastructure for smart cities.

MGS-6311-8P2X

- 2500/1000/100BASE-T 802.3at PoE+ port x 8
- 10G/1GBASE-X SFP+ port x 2
- Max. 150-watt PoE budget

MGS-6311-8UP4X

- 2500/1000/100BASE-T 802.3bt PoE++ port x 8
- 10G/1GBASE-X SFP+ port x 4
- Max. 240-watt PoE budget

MGS-6311-24UPL6X

- 2500/1000/100BASE-T 802.3bt PoE++ port x 24
- 1G/2.5G/10G SFP+ port x 6
- Max. 720-watt PoE budget

10G L3 802.3at PoE+ Managed Gigabit Switches



IPv6 Routing and 10G Ethernet Switch Solutions with PoE Plus for SMBs

PLANET GS-6311 Layer 3 Managed PoE Switch series supports both IPv4 and IPv6 protocols, and hardware-based Layer 3 static routing capability. They comply with IEEE 802.3at Power over Ethernet Plus (PoE+), equipped with 8 to 48 10/100/1000BASE-T Gigabit Ethernet ports and 2 or 4 10G SFP+ uplink slots. All their Gigabit Ethernet ports when integrated with an 802.3at PoE+ injector can be in full operation.

Extended 10G Network Infrastructure Solution

With the 2/4 built-in SFP+ slots, the GS-6311 series performs up to 176Gbps non-blocking switch fabric to handle extremely large amounts of data. It greatly helps SMBs to build 10Gbps Ethernet network, fulfilling the need of backbone connection, heavy transmission of video streaming services, cloud services and NAS applications at an affordable price.

GS-6311-48P6X

- 10/100/1000BASE-T 802.3at PoE++ port x 48
- 10G/1GBASE-X SFP+ port x 6
- Max. 600-watt PoE budget

GS-6311-24HP4X

- 10/100/1000BASE-T 802.3at PoE++ port x 8
- 10/100/1000BASE-T 802.3at PoE++ port x 16
- 10G/1GBASE-X SFP+ port x 4
- Max. 480-watt PoE budget

GS-6311-24PL4X/ GS-6311-24P4XV

- 10/100/1000BASE-T with 802.3at PoE+ port x 24
- 10GBASE-X SFP+ slot x 4
- Max. 370-/720-watt PoE budget
- 2-inch Smart Color LCD for easy management and monitoring (GS-6311-24P4XV)

L2+ 802.3at/802.3bt PoE Managed Gigabit Switches



To meet the PoE network applications requiring higher power supply with Gigabit speed transmission, PLANET L2+ 802.3at PoE+ and 802.3bt PoE++ Managed Switches provide user-friendly but advanced IPv6 and IPv4 management interfaces to bring out efficiently centralized High Power PoE management. It offers IPv4 and IPv6 VLAN routing feature which allows to crossover different VLANs and different IP addresses for the purpose of having a highly-secure, flexible management and simpler networking applications.

As an advanced PoE switch designed for non-stop surveillance or wireless networks, the L2+ Managed PoE switches feature intelligent PoE functions such as PD alive check, scheduled power recycling and over-temperature protection to improve the availability of critical business applications. Time-based PoE schedule can be used to control PoE power feeding during specified time intervals to help companies and campuses to save power and money.

GS-5220-8P2T2S

- 10/100/1000BASE-T with 802.3at PoE+ port x 8
- 10/100/1000BASE-T port x 2
- 100/1000BASE-X SFP port x 2
- 240-watt PoE budget
- 13-inch desktop size, 1U rack-mountable
- Smart fan design for silent operation

GS-4210-8UP2X

- 10/100/1000BASE-T with 802.3bt PoE++ port x 8
- 100/1G/2.5G/10GBASE-X SFP+ port x 2
- 240-watt PoE budget
- 12-inch desktop size, 1U rack-mountable
- Smart fan design for silent operation

AVS-4210-8HP2X


- 10/100/1000BASE-T with 802.3bt PoE++ port x 4
- 10/100/1000BASE-T with 802.3at PoE+ port x 4
- 100/1G/2.5G/10GBASE-X SFP+ port x 2
- 240-watt PoE budget
- 12-inch desktop size, 1U rack-mountable
- Smart fan design for silent operation

L2/L4 802.3at/bt PoE Managed Gigabit Switches



The L2/L4 802.3at/bt PoE Managed Gigabit Switches allow users to flexibly connect standard and high powered devices simultaneously. To facilitate power management, the Switches come with powerful PoE management features such as over temperature protection, usage threshold alert and auto power allocation to prevent power budget overloading. The PoE power budget can be allocated by priorities or classification and send alert event logs when power usage reaches the defined threshold.

- Complies with IEEE 802.3at/bt Power over Ethernet end-span PSE
- Supports PoE power up to 30.8/60 watts for each PoE port
- Remote PoE power management and monitoring
- Supports PD alive check, scheduled power recycling and time-based PoE schedule and over temperature protection
- IEEE 802.1Q VLAN, Private VLAN and Q-in-Q
- Layer 3 and 4 Access Control List
- Quality of Service (QoS)
- IEEE 802.1D/1w Spanning Tree Protocol
- IGMP snooping v1 and v2, MLD snooping
- Management interface – console ; Telnet Web; SNMP v1, v2c and v3; SSL and SSH

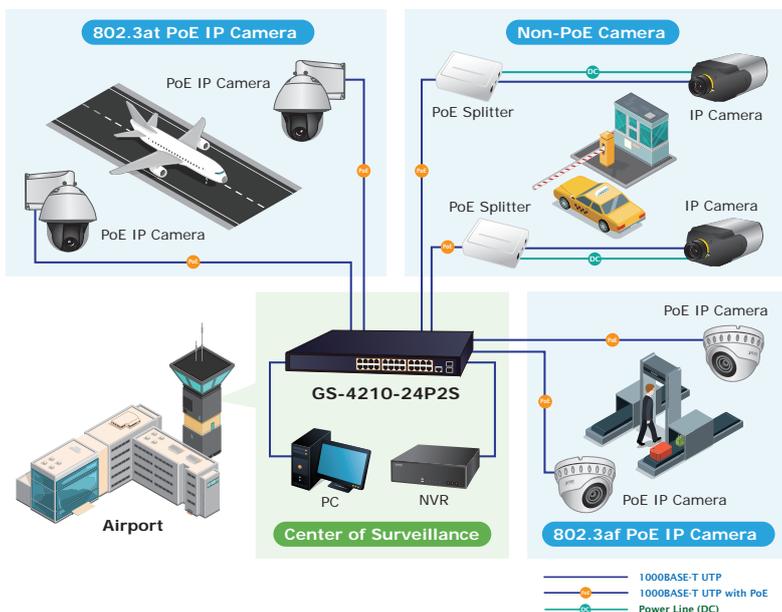

GS-4210-8P2S/GS-4210-8P2C

- 10/100/1000BASE-T with 802.3at PoE+ port x 8
- 10/100/1000BASE-T port x 2 (GS-4210-8P2C)
- 100/1000BASE-X SFP port x 2
- Max.120-watt PoE budget
- 12-inch desktop size, 1U rack-mountable
- Smart fan design for silent operation

GS-4210-8UP2S

- 10/100/1000BASE-T with 802.3bt PoE++ port x 8
- 100/1000BASE-X SFP port x 2
- Max. 180-watt PoE budget
- 12-inch desktop size, 1U rack-mountable
- Smart fan design for silent operation

GS-4210-16P4C/GS-4210-16P2S

- 10/100/1000BASE-T with 802.3at PoE+ port x 16
- 10/100/1000BASE-T port x 4
- 100/1000BASE-X SFP port x 2/4
- Max. 240-watt PoE budget

GS-4210-24P2S

- 10/100/1000BASE-T with 802.3at PoE+ port x 24
- 100/1000BASE-X SFP port x 2
- Max. 370-watt PoE budget

GS-4210-24P4C/GS-4210-24PL4C

- 10/100/1000BASE-T with 802.3at PoE+ port x 24
- 10/100/1000BASE-T port x 4
- 100/1000BASE-X SFP port x 4
- Max. 370-/650-watt PoE budget
- Smart fan design for silent operation

GS-4210-48P4S

- 10/100/1000BASE-T with 802.3at PoE+ port x 48
- 100/1000BASE-X SFP port x 4
- Max. 600-watt PoE budget
- Smart fan design for silent operation

GS-4210-16UP8T4X/GS-4210-24UP4X

- 10/100/1000BASE-T port x 8 (GS-4210-16UP8T4X)
- 10/100/1000BASE-T with 802.3bt PoE++ port x 16/24
- 10GBASE-X SFP+ slot x 4
- Max. 420-/720-watt PoE budget

95W

L2/L4 802.3at PoE+ Managed Switches



PLANET L2/L4 Managed 802.3af/at PoE switches provide a cost-effectiveness advantage to local area network and are widely accepted in SMB office network. They provide intelligent Layer 2 data packet switching and management functions, friendly web user interface, and stable operation. They also comply with Power over Ethernet (PoE) at an affordable price. The Managed PoE switches feature 16-port PoE to 24-port PoE choices to meet various customer requirements. They offer a rack-mountable, safe and reliable power solution for SMBs deploying PoE VoIP systems and PoE wireless networks, or requiring enhanced data security and network traffic management.

FGSW-1816HPS

- 10/100BASE-TX with 802.3at PoE+ port x 16
- 10/100/1000BASE-T port x 2
- 1000BASE-X SFP port x 2
- 240-watt PoE budget
- 19-inch, 1U rack-mountable

FGSW-2624HPS

- 10/100BASE-TX with 802.3at PoE+ port x 24
- 10/100/1000BASE-T port x 2
- 1000BASE-X SFP port x 2
- 240-/370-watt PoE budget
- 19-inch, 1U rack-mountable

Web Smart Ethernet Switch



Efficient Network Management Through NMS and App

The GS-2210 Web Smart Switch series, known for such features as QoS, Link aggregation, VLANs, IGMP, and so on, provides an eye-catching feature called NMS developed by PLANET to easily and remotely manage and monitor network devices in the local environment from mobile app. This feature not only improves operational convenience, but also ensures users to have real-time control over their network infrastructure. It provides users with an unparalleled experience.

- PLANET NMS and NMSViewerPro for deployment management
- 8 to 24 IEEE 802.3at PoE ports with a total PoE budget of up to 260 watts
- Supports PoE schedule, PD alive check and ONVIF
- Supports static trunk, QoS, port isolation and cable diagnostics
- IPv4 IGMP snooping v1, v2; DHCP snooping and IEEE 802.1Q VLAN

GS-2210-8P2S/GS-2210-16P2S/ GS-2210-24P2S

- 10/100/1000BASE-T with 802.3at PoE+ ports x 8/16/24
- 100/1000BASE-X SFP ports x 2
- 120/240/260-watts PoE budget

Unmanaged LCD PoE+ Switches



PLANET LCD PoE Switches are an ideal Plug and Watch Power over Ethernet solution which provides quick installation, real-time PoE work status monitoring and immediate troubleshooting through its unique LCD display to improve work efficiency and quality without any PC or software required.

The LCD monitors of the LCD PoE Switches clearly show the PoE loading of each port, total PoE power usage and system status, such as overload, low voltage, over voltage and high temperature. With its brand-new LCD monitor, user is able to obtain detailed information about real-time PoE working condition of the LCD PoE Switches directly. Also the Power Budget Control function helps to prevent power budget overloading.

LCD Monitor Status

Switch Port Information

01	30.3W	---	M	867M	08	---	---	---	M
02	---	---	---	---	09	-8.3W	---	---	<1M
03	---	---	---	---	10	---	---	---	---
04	15.4W	-10M	---	---	11	-OFF-	---	---	---
05	---	---	---	---	12	---	---	---	---
06	---	---	---	---	13	17.6W	223M	246M	---
07	---	---	---	---	14	---	---	---	---
PB: 300W		TP: 72W		PD: 0					

Main Menu

- 01 - Switch Mode
- 02 - Budget Control
- 03 - PSE Port Priority
- 04 - PSE Port Enable
- 05 - PD Type
- 06 - Alive Check
- 07 - Bandwidth
- 08 - Fan Control

Switch Mode

Options:

- Standard <
- VLAN
- Extend

PSE Port Enable

Port	Status
01	Enable <
	Disable

Current Setting: Enable

<UP>/<Down>:Select
<Enter>:Confirm <Back>:Return

GSD-1222VHP

- 10/100/1000BASE-T with 802.3 at PoE+ port x 8
- 10/100/1000BASE-T uplink port x 2
- 1000BASE-X SFP port x 2
- Hardware DIP Switch, including Standard, VLAN and Extend mode.
- 120-watt PoE budget
- LCD with real-time PoE port status display, and power and alarm alerts
- VLAN Isolation
- 250m distance w/30W power output in Extend Mode
- 12-inch, 1U, rack-mountable

GSW-1820VHP/GSW-2620VHP

- 10/100/1000BASE-T with 802.3 at PoE+ port x 16/24
- 1000BASE-X SFP uplink port x 2
- Hardware DIP Switch, including Standard, VLAN and Extend mode.
- 300-watt PoE budget
- LCD with real-time PoE port status display, and power and alarm alerts
- VLAN Isolation
- 250m distance with 30W power output in Extend Mode

FGSD-1022VHP

- 10/100BASE-TX with 802.3 at PoE+ port x 8
- 10/100/1000BASE-T uplink port x 2
- Hardware DIP Switch, including Standard, VLAN and Extend mode.
- 120-watt PoE budget
- LCD with real-time PoE port status display, and power and alarm alerts
- VLAN Isolation
- 250m distance with 30W power output in Extend Mode
- 12-inch, 1U, rack-mountable

FGSW-1822VHP/FGSW-2622VHP

- 10/100BASE-TX with 802.3at PoE+ port x 16/24
- 10/100/1000BASE-T port x 2
- 1000BASE-X SFP uplink port x 2
- 300-watt PoE budget
- LCD with real-time PoE port status display, and power and alarm alerts
- 250m distance with 30W power output in Extend Mode

Industrial Flat-type PoE+ Switches

Easily-deployed and Expanded PoE Network

Designed to be installed in a wall enclosure or simply mounted at any convenient location on a wall, PLANET Industrial Flat-type PoE+ Switches are an ideal solution to meeting the demand of sufficient PoE power for the network applications such as building/home automation network, Internet of things (IoT), and wired and wireless IP surveillance.

Innovative Wall-mount Installation

The Industrial Flat-type PoE+ Switches adopt "Front Access" design, making the installing, cable wiring, LED monitoring and maintenance of the Industrial Flat-type PoE+ Switches placed in an enclosure easier for technicians to manage. Its magnetic wall mounting or DIN rail installation enables its efficient use of enclosure space, thereby making its usability more flexible.

WGS-6325-8UP2X

- 100/1000/2500BASE-T with 802.3bt PoE++ port x 4
- 10/100/1000BASE-T with 802.3bt PoE++ port x 4
- 10G/2.5G/1GBASE-X SFP+ port x 2
- Max. 480-watt PoE budget
- IPv4/IPv6 OSPF dynamic routing
- ERPS Ring Data Recovery time < 10ms
- Supports Modbus TCP/IP Protocol
- 48~54V DC dual power design



WGS-5225-8UP2SV

- 2.4-inch color LCD touch screen
- 10/100/1000BASE-T with 802.3bt PoE++ port x 8
- 100/1000/2500BASE-X SFP port x 2
- Max. 720-watt PoE budget
- Layer 3 Static route supported
- ERPS Ring Data Recovery time < 10ms
- Supports Modbus TCP/IP Protocol
- 48~54V DC dual power design



WGS-5225-8P2S/ WGS-5225-8P2SV

- 2.4-inch color LCD touch screen with management functions (WGS-5225-8P2SV)
- 10/100/1000/2500BASE-T with 802.3at PoE+ port x 8
- 100/1000/2500BASE-X SFP port x 2
- Max. 240-watt PoE budget
- Layer 3 Static route supported
- ERPS Ring Data Recovery time < 10ms
- Supports Modbus TCP/IP Protocol
- 48~54V DC dual power design



WGS-5215-16UP4X/ WGS-5215-16UP4XV

- 2.4-inch color LCD touch screen with management functions (WGS-5215-16UP4XV)
- 10/100/1000BASE-T with 802.3bt PoE++ port x 16
- 100/1G/2.5G/10GBASE-X SFP+ port x 4
- Max. 720-watt PoE budget
- Layer 3 Static route supported
- ERPS Ring Data Recovery time < 450ms
- Supports Modbus TCP/IP Protocol
- 48~54V DC dual power design



WGS-4215-8P2X/ WGS-4215-8P2XV

- 2.4-inch color LCD touch screen with management functions (WGS-4215-8P2XV)
- 10/100/1000/1000BASE-T with 802.3at PoE+ port x 8
- 100/1G/2.5G/10GBASE-X SFP+ port x 2
- Max. 288-watt PoE budget
- Layer 3 Static route supported
- ERPS Ring Data Recovery time < 450ms
- Supports Modbus TCP/IP Protocol
- 48~54V DC dual power design



WGS-4215-16P2S

- 10/100/1000BASE-T with 802.3at PoE+ port x 16
- 100/1000/1000BASE-X SFP port x 2
- Max. 240-watt PoE budget
- IPv6 and IPv4 Web, Telnet and SNMP management
- PD alive check, scheduled power recycling and time-based PoE schedule
- ERPS Ring Data Recovery time < 450ms
- 48~54V DC dual power design
- -10 to 60 degrees C operating temperature



WGS-4215-8P2S/ WGS-4215-8HP2S

- 10/100/1000BASE-T with 802.3at PoE+ port x 8
- 10/100/1000BASE-T with 802.3bt PoE++ port x 8 (WGS-4215-8HP2S)
- 100/1000/1000BASE-X SFP port x 2
- Max. 200-/360-watt PoE budget
- IPv6 and IPv4 Web, Telnet and SNMP management
- PD alive check, scheduled power recycling and time-based PoE schedule
- ERPS Ring Data Recovery time < 450m
- 48~54V DC dual power design



WGS-804HPT

- 10/100/1000BASE-T with 802.3at PoE+ port x 4
- 10/100/1000BASE-T port x 4
- Max. 144-watt PoE budget
- LED indicators for PoE usage and status
- 802.1Q VLAN, MSTP and IGMP snooping
- IPv6 and IPv4 Web, Telnet and SNMP management
- 48~54V DC dual power design
- -40 to 75 degrees C wide operating temperature



WGS-818HP/WGS-814HP/ WGS-804HP

- 10/100/1000BASE-T with 802.3at PoE+ port x 8 (WGS-818HP)
- 10/100/1000BASE-T with 802.3at PoE+ port x 4
- 10/100/1000BASE-T port x 4
- Max. 60-/120-watt PoE budget
- LED indicators for PoE usage and status
- 48~54V DC redundant power
- -10 to 60 degrees C operating temperature



Unmanaged PoE+/PoE++ Switches

Gigabit

GSD-1022UP

- 10/100/1000BASE-T with 802.3bt PoE++ port x 2
- 10/100/1000BASE-T with 802.3at PoE+ port x 4
- 10/100/1000BASE-T port x 2
- Max. 120-watt PoE budget
- 802.3bt PoE++/Legacy via DIP selection
- Compact size, wall-mountable



GSD-604HP

- 10/100/1000BASE-T with 802.3at PoE+ port x 4
- 10/100/1000BASE-T port x 2
- Max. 55-watt PoE budget
- Port-based VLAN via DIP selection
- Compact size, wall-mountable



GSD-908HP

- 10/100/1000BASE-T with 802.3at PoE+ port x 8
- 10/100/1000BASE-T port x 1
- Max. 100-watt PoE budget
- Compact size, wall-mount and magnetic wall mountable



GSD-1008HP

- 10/100/1000BASE-T with 802.3at PoE+ port x 8
- 10/100/1000BASE-T port x 2
- Max. 120-watt PoE budget
- Hardware-based DIP switch for Standard, VLAN and Extend mode selection
- 9-inch, 1U rack-mountable



MGS-910XP

- 10/100/1000/2500BASE-T with 802.3at PoE+ port x 8
- 10GBASE-X SFP+ port x 1
- Max. 120-watt PoE budget
- Desktop size, 1U rack-mountable



GSD-2022P

- 10/100/1000BASE-T with 802.3at PoE+ port x 16
- 10/100/1000BASE-T port x 2
- 1000BASE-X SFP port x 2
- Max. 185-watt PoE budget
- Hardware-based DIP switch for Standard, VLAN and Extend mode selection
- Desktop size, 1U rack-mountable



GSW-1820HP

- 10/100/1000BASE-T with 802.3at PoE+ port x 16
- 1000BASE-X SFP port x 2
- Max. 220-watt PoE Power budget
- Hardware-based DIP switch for Standard, VLAN and Extend mode selection
- 19-inch, 1U rack-mountable



GSW-2620HP

- 10/100/1000BASE-T with 802.3at PoE+ port x 24
- 1000BASE-X SFP port x 2
- Max. 220-watt PoE Power budget
- Hardware-based DIP switch for Standard, VLAN and Extend mode selection
- 19-inch, 1U rack-mountable



GSW-5240HP

- 10/100/1000BASE-T with 802.3at PoE+ port x 48
- 1000BASE-X SFP port x 4
- Max. 370-watt PoE budget
- Supports PD alive checks
- 19-inch, 1U rack-mountable



FSD-604HP/FSD-1008HP

- 10/100BASE-TX with 802.3at PoE+ port x 4/8
- 10/100BASE-TX port x 2
- Max. 60-/120-watt PoE budget
- Hardware-based DIP switch for Standard, VLAN and Extend mode selection
- Internal AC, fanless design



FSD-1011HP

- 10/100BASE-TX with 802.3at PoE+ port x 8
- 10/100/1000BASE-T port x 1
- 100/1000BASE-X SFP port x 1
- Max. 120-watt PoE budget
- Hardware-based DIP switch for Standard, VLAN and Extend mode selection
- 9-inch, 1U rack-mountable



FGSD-1821P/FGSW-2511P

- 10/100BASE-TX with 802.3at PoE+ port x 16/24
- 10/100/1000BASE-T port x 2/1
- 1000BASE-X SFP port x 1 (Combo Port)
- Max. 185-/190-watt PoE budget
- Hardware-based DIP switch for Standard, VLAN and Extend mode selection



Fast Ethernet

Multi-port PoE Injector Hubs

Quick and Easy PoE Network Deployment

PLANET PoE Injector Hubs provide 4-/12-/24-port IEEE 802.3at/bt Power over Ethernet injector functions and comply with IEEE 802.3, IEEE 802.3u, IEEE 802.3at and IEEE 802.3bt standards. This series supports PoE power for any remote IEEE 802.3at/bt powered device (PD) like wireless access point, IP phone, and IP camera.

Easy Cabling Installation

The PoE Injector Hubs are installed between a regular Ethernet Switch and PDs; they inject power to the PDs without affecting the data transmission performance. They offer a cost effective and quick solution to upgrading network system to IEEE 802.3at/bt Power over Ethernet system without replacing the existing Ethernet Switch.

- Complies with IEEE 802.3at/bt Power over Ethernet mid-span PSE
- PoE power up to 95-watt for PoE output
- Remote power feeding up to 100m
- Full power support for each PoE port
- Automatically detects the powered device (PD)
- Indication of LED indicator power input
- 100~240VAC, 50/60Hz, universal power supply

802.3bt PoE++ 1G/2.5G/10G Managed Injector Hubs

UPOE-800XG

- 10/100/1G/2.5G/10GBASE-T "Data" input port x 8
- 10/100/1G/2.5G/10GBASE-T "Data + Power" output port x 8
- Max. 400-watt PoE budget
- PoE Power up to 95 watts for each PoE port
- Web management interface
- SNMP Trap and PoE schedule
- 19-inch, 1U rack-mountable



UPOE-1600XG

- 10/100/1G/2.5G/10GBASE-T "Data" input port x 16
- 10/100/1G/2.5G/10GBASE-T "Data + Power" output port x 16
- Max. 600-watt PoE budget
- PoE Power up to 95 watts for each PoE port
- Web management interface
- SNMP Trap and PoE schedule
- 19-inch, 1U rack-mountable



UPOE-2400XG

- 10/100/1G/2.5G/10GBASE-T "Data" input port x 24
- 10/100/1G/2.5G/10GBASE-T "Data + Power" output port x 24
- Max. 800-watt PoE budget
- PoE Power up to 95 watts for each PoE port
- Web management interface
- SNMP Trap and PoE schedule
- 19-inch, 1U rack-mountable



UPOE-800G

- 10/100/1000BASE-T "Data" input port x 8
- 10/100/1000BASE-T "Data + Power" output port x 8
- Max. 400-watt PoE budget
- PoE Power up to 95 watts for each PoE port
- Web management interface
- SNMP Trap and PoE schedule
- 19-inch, 1U rack-mountable



UPOE-1600G

- 10/100/1000BASE-T "Data" input port x 16
- 10/100/1000BASE-T "Data + Power" output port x 16
- Max. 600-watt PoE budget
- PoE Power up to 95 watts for each PoE port
- Web management interface
- SNMP Trap and PoE schedule
- 19-inch, 1U rack-mountable



UPOE-2400G

- 10/100/1000BASE-T "Data" input port x 24
- 10/100/1000BASE-T "Data + Power" output port x 24
- Max. 800-watt PoE budget
- PoE Power up to 95 watts for each PoE port
- Web management interface
- SNMP Trap and PoE schedule
- 19-inch, 1U rack-mountable



802.3bt PoE++ Injector Hubs

UPOE-400

- 100/1G/2.5G/5GBASE-T "Data" input port x 4
- 100/1G/2.5G/5GBASE-T "Data + Power" output port x 4
- Max. 160-watt PoE budget
- Hardware-based DIP switch for 802.3bt PoE++, PoH and Force mode selection
- Compact size, wall-mountable



IPOE-270/IPOE-270-12V

- 10/100/1G/2.5G/5GBASE-T "Data" input port x 2
- 10/100/1G/2.5G/5GBASE-T "Data + Power" output port x 2
- Up to 90-watt of PoE power on 4-apir UTP
- Max. 180-watt PoE budget
- -40~75 degrees C wide operating temperature
- IP30 metal case, DIN-rail and wall-mountable



IPOE-470/IPOE-470-12V

- 10/100/1G/2.5G BASE-T "Data" input port x 4
- 10/100/1G/2.5G BASE-T "Data + Power" output port x 4
- Up to 95-watt of PoE power on 4-apir UTP
- Max. 240-watt PoE budget
- -40~75 degrees C wide operating temperature
- IP30 metal case, DIN-rail and wall-mountable



802.3at PoE+ Injector Hubs

HPOE-460

- 10/100/1000BASE-T "Data" input port x 4
- 10/100/1000BASE-T "Data + Power" output port x 4
- Max. 120-watt PoE budget
- PoE Power up to 30.8 watts for each PoE port
- Compact size, wall-mountable



POE-1200G

- 10/100/1000BASE-T "Data" input port x 12
- 10/100/1000BASE-T "Data + Power" output port x 12
- Max. 220-watt PoE budget
- PoE Power up to 30.8 watts for each PoE port
- Web management interface
- SNMP Trap and PoE schedule
- 19-inch, 1U rack-mountable



POE-2400G

- 10/100/1000BASE-T "Data" input port x 24
- 10/100/1000BASE-T "Data + Power" output port x 24
- Max. 440 watt PoE budget
- PoE Power up to 30.8 watts for each PoE port
- Web management interface
- SNMP Trap and PoE schedule
- 19-inch, 1U rack-mountable



HPOE-1200G

- 10/100/1000BASE-T "Data" input port x 12
- 10/100/1000BASE-T "Data + Power" output port x 12
- Max. 360-watt PoE budget
- PoE Power up to 30.8 watts for each PoE port
- Web management interface
- SNMP Trap and PoE schedule
- 19-inch, 1U rack-mountable



HPOE-2400G

- 10/100/1000BASE-T "Data" input port x 24
- 10/100/1000BASE-T "Data + Power" output port x 24
- Max. 720-watt PoE budget
- PoE Power up to 30.8 watts for each PoE port
- Web management interface
- SNMP Trap and PoE schedule
- 19-inch, 1U rack-mountable



Single-port PoE Injectors & Splitters

PLANET Single-port PoE Injectors and Splitters are compliant with IEEE 802.3af/at 30-watt PoE and IEEE 802.3bt Ultra PoE standard to help achieve a more flexible network deployment. The PoE injectors insert power into Ethernet cables and allow the cable between the PoE injector and splitter to transfer data and power simultaneously. The PoE splitter is paired with the injector to turn the non-PoE devices into PoE-ready equipment. The maximum distance between the injector and splitter is 100 meters.

802.3bt PoE++ Injectors

POE/IPOE Series

- Complies with IEEE 802.3bt Power over Ethernet
- Maximum power up to 95 watts
- Auto-detection of IEEE 802.3bt PoE++ PDs from being damaged by incorrect installation

IPOE-171-60W/IPOE-171-95W

- Up to 95 watts of PoE power on 4-pair UTP
- Data and power over one Ethernet cable up to 100 meters
- Backward compatible with IEEE 802.3at/af PD device
- Supports 10/100/1G/2.5G/5G applications
- -40 to 75 degrees C wide operating temperature
- IP30 metal case, DIN-rail and wall-mountable



POE-171A-60/POE-171A-95

- Up to 95 watts of PoE power on 4-pair UTP
- Data and power over one Ethernet cable up to 100 meters
- Backward compatible with IEEE 802.3at/af PD device
- Supports 10/100/1G/2.5G/5G applications



POE-176-95/IPOE-176

- 802.3bt PoE++ compliant, up to 95-watt power output
- DIP switch for 802.3bt/Force mode selection
- Supports 10/100/1G/2.5G/5G/10G applications
- -40 to 75 degrees C wide operating temperature (IPOE-176)
- IP30 metal case, DIN-rail and wall-mountable (IPOE-176)



POE-172/POE-173

- Up to 60 watts of PoE power on 4-pair UTP
- Data and power over one Ethernet cable up to 100 meters
- Backward compatible with IEEE 802.3at/af PD device
- Supports 10/100/1000BASE-T applications



POE-175-95

- Up to 95 watts of PoE power on 4-pair UTP
- Data and power over one Ethernet cable up to 100 meters
- Backward compatible with IEEE 802.3at/af PD device
- Supports 10/100/1000BASE-T applications



IGUP-805AT/IGUP-1205AT/IGUP-2205AT

- 1-/1-/2-port 10/100/1000BASE-T 802.3bt PoE++ type-4 PSE
- 1-/2-/2-port 100/1000BASE-X SFP
- -40 to 75 degrees C wide operating temperature.
- 12-56V DC redundant power
- Max. 90-/90-/180-watt PoE budget
- DIP switch for 802.3bt/PoH/Force mode control



IPOE-175

- Up to 60 watts of PoE power on 4-pair UTP
- Data and power over one Ethernet cable up to 100 meters
- IP67 and IK10-rated aluminum case
- -40~75 degrees C wide operating temperature
- 24~56V DC to 55V power boost technology



GUP-805A-60W/GUP-805A-95W

- 1-port 10/100/1000BASE-T 802.3bt PoE++ type-4 PSE
- 1-port 100/1000BASE-X SFP
- Max. 60-/95-watt PoE power on 4-pair UTP
- DIP switch for PoE power feeding options (BT/UPOE/Legacy) selection
- Made of metal



Ultra PoE Splitters

POE-171S/POE-172S

- 10/100/1000BASE-T "Data" output port x 1
- 10/100/1000BASE-T "Data + Power" input port x 1
- Max. 50-/60-watt power output
- Supports 12V/19V/24V DC power output by DIP switch



802.3bt PoE++ Splitters

IPOE-176S

- 10G/5G/2.5G/1G/100Mbps "Data" output port x 1
- 10/100/1G/2.5G/5G/10GBASE-T "Data + Power" input port x 1
- Compliant with IEEE 802.3bt PoE++ PD
- Max. 60 watt power output
- Supports 12V/19V/24V DC power output by DIP switch
- -40 to 75 degrees C wide operating temperature (IPOE-176S)
- IP30 metal case, DIN-rail or wall-mountable (IPOE-176S)

10Gbps
RJ45802.3bt
PoE++

POE-173S/ POE-173S-12V/ IPOE-173S

- 10/100/1000BASE-T "Data" output port x 1
- 10/100/1000BASE-T "Data + Power" input port x 1
- Max. 60 watt power output
- Supports 12V/24V DC power output by DIP switch (IPOE-173S)
- -40 to 75 degrees C wide operating temperature (IPOE-173S)
- IP30 metal case, DIN-rail and wall-mountable (IPOE-173S)
- Compliant with IEEE 802.3bt PoE++ PD

802.3bt
PoE++

IPOE-175S

- Supports 12V DC, 60-watt power output
- IP67 and IK10-rated aluminum case
- -40~75 degrees C wide operating temperature
- Compliant with IEEE 802.3bt PoE++ PD
- Supports 10/100/1G applications

802.3bt
PoE++

802.3at PoE+ Injectors & Splitters

POE/IPOE/GTP Series

- Complies with IEEE 802.3af/at Power over Ethernet
- Maximum power up to 30.8 watts
- Auto-detection of PoE+ IEEE 802.3at PDs from being damaged by incorrect installation

GTP-805A

- 10/100/1000BASE-T "Data + Power" output port x 1
- 1000BASE-X "Data" input port x 1
- Mid-span PSE
- Made of metal

100FX
Fiber
Optical

IGTP-805AT/IGTP-802T/ IGTP-802TS/IGTP-815AT

- 100/1000BASE-X single/ multi mode LC (SFP interface)
- 10/100/1000BASE-T with 802.3at PoE+ port x 1
- Link Fault Pass-through (LFP) support
- -40 to 75 degrees C operating temperature
- IP30 metal case, DIN-rail and wall-mountable



IGTP-2205AT

- 2-port 10/100/1000BASE-T 802.3at PoE+
- 2-port 100/1000BASE-X SFP
- -40 to 75 degrees C wide operating temperature
- Compact IP30 metal case
- 48~54V DC power input

Compact
size

POE-163/POE-165

- 10/100/1000BASE-T "Data" input port x 1 (POE-163)
- 10/100/1000BASE-T "Data + Power" output port x 1 (POE-163)
- 10/100/1G/2.5G/5Gbps "Data" input port x 1 (POE-165)
- 10/100/1G/2.5G/5Gbps "Data + Power" output port x 1 (POE-165)
- Mid-span PSE
- Plastic compact size, internal 100-240V AC power supply

Internal
Power

IPOE-162

- 10/100/1000BASE-T "Data" input port x 1
- 10/100/1000BASE-T "Data + Power" output port x 1
- -40 to 75 degrees C operating temperature
- IP30 metal case, DIN-rail and wall-mountable



IPOE-260/IPOE-260-12V

- 10/100/1000BASE-T "Data" input port x 2
- 10/100/1000BASE-T "Data + Power" output port x 2
- -40 to 75 degrees C operating temperature
- IP30 metal case, DIN-rail and wall-mountable



IPOE-162S

- 10/100/1000BASE-T "Data" output port x 1
- 10/100/1000BASE-T "Data + Power" input port x 1
- Power output: 12V/24V DC, max.2A
- -40 to 75 degrees C operating temperature
- IP30 metal case, DIN-rail and wall-mountable

12/24V
DC Power
Output

POE-161S/POE-162S

- 10/100/1000BASE-T "Data" output port x 1
- 10/100/1000BASE-T "Data + Power" input port x 1
- Made from plastic
- Power output: 5V/12V DC, max. 5A (POE-161S)
- Power output: 12V/24V DC, max. 2A (POE-162S)

12/24V
DC Power
Output

802.3af PoE Injectors

POE/FTP Series

- Complies with IEEE 802.3af Power over Ethernet
- Data and power transmission distance up to 100 meters
- Maximum power up to 15.4 watts
- Auto-detection of PoE IEEE 802.3af equipment and devices from being damaged by incorrect installation
- Desktop size, wall-mountable

FTP-802/802S15

- 10/100BASE-TX "Data + Power" output port x 1
- 100BASE-FX "Data" input port x 1
- End-span PSE
- Made of metal



PoE Extenders

PLANET PoE Extenders are a newly-designed and simple device which extends both the reach of Ethernet data and power over the standard 100m (328 ft.) RJ45 UTP cable to 200m, 300m or longer distance, making the network installations more efficient and cost-effective.

POE/IPOE-E Series

- Extends the range of PoE by an additional 100 meters (328ft.) or more
- Forwards both Ethernet data and PoE power to remote devices
- Multiple units, daisy-chain installation supported
- No external power cable required for installation
- Compact size, wall-mountable
- Plug and Play

802.3bt PoE++ Extenders

IPOE-E174

- Forwards both Ethernet data and in-line power to 4 remote devices
- 1-port 802.3bt PoE++ PD
- 4-port IEEE 802.3af/at Power over Ethernet/ end-span PSE
- Supports PoE output power up to 30.8 watts for each PoE port
- Extends the range of PoE for an additional 100 meters (328ft.)
- -40 to 75 degrees C wide operating temperature
- No external power cable required for installation
- Plug and Play, no software required



POE-E304/WGS-E304PT

- Forwards both Ethernet data and in-line power to 4 remote devices
- 1-port 802.3bt PoE++ Power over Ethernet PD
- 4-port IEEE 802.3af/at Power over Ethernet/ end-span PSE
- Supports PoE output power up to 30.8 watts for each PoE port
- Extends the range of PoE for an additional 100 meters (328ft.)
- No external power cable required for installation
- Plug and Play, no software required



IPOE-E302/POE-E301

- 10/100/1000BASE-T "Data + Power" shielded RJ45 input port x 1, 802.3bt PoE++ PD compliant
- 10/100/1000BASE-T "Data + Power" shielded RJ45 output port x 2
- Max. total PoE budget up to 60 watts
- -40 to 75 degrees C wide operating temperature (IPOE-E302)
- Extends Cat.5 cable installations to beyond 100 meters



802.3at/af PoE Extenders

POE-E201

- 10/100/1000BASE-T "Data + Power" output port x 1
- 10/100/1000BASE-T "Data + Power" input port x 1
- Complies with IEEE 802.3af/at Power over Ethernet mid-span
- Maximum extended distance up to 500m



POE-E202

- 10/100/1000BASE-T "Data + Power" output port x 2
- 10/100/1000BASE-T "Data + Power" input port x 1
- Complies with IEEE 802.3af/at Power over Ethernet mid-span
- Maximum extended distance up to 300m



Long Reach PoE L2/L4 IPv6 Managed Switches

LRP Series



PLANET Long Reach PoE (LRP) solution is designed to extend IP Ethernet transmission and inject power over an existing coaxial cable for distance up to 1000m (3280ft) into PoE IP camera, PoE wireless AP and any 802.3af/at compliant powered device (PD).

The Long Reach PoE solution consists of an LRP switch/injector and LRP extender which can work without any power adapter anywhere on your network infrastructure. It is a perfect solution for sending IP video links and power to remote PoE IP camera installation that is beyond the 100-meter distance limit of Ethernet.


- Re-use the existing coaxial cable that eliminates power cabling with Power over coaxial (PoC)
- Data and Power over coaxial up to 1km
- Up to 36-watt power output per PoC port
- PD alive check, scheduled power recycling and time-based PoE schedule
- IEEE 802.1Q VLAN, Q-in-Q, Private VLAN and GVRP
- IEEE 802.1w RSTP, IEEE 802.1s MSTP and loop protection
- IGMP snooping v2 and v3 and MLD snooping
- QoS, Voice VLAN and bandwidth control
- Layer 2, 3 and 4 Access Control List
- IPv4 and IPv6 Web interface; Telnet; SNMP v1, v2c and v3; SSH and SSL management

LRP-822CS

- Long Reach PoE over coaxial port x 8
- 100/100/1000BASE-T port x 2
- 100/1000BASE-X SFP port x 2
- 240-watt PoE budget
- Up to 36 watts per PoC port
- Power over coaxial up to 1km

LRP-1622CS

- Long Reach PoE over coaxial port x 16
- 100/100/1000BASE-T port x 2
- 100/1000BASE-X SFP port x 2
- 440-watt PoE budget
- Up to 36 watts per PoC port
- Power over coaxial up to 1km

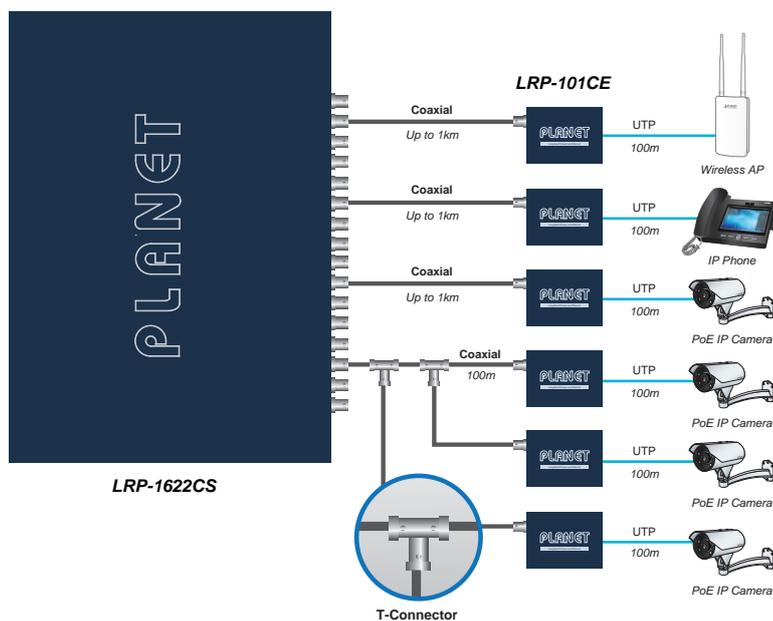


Long Reach PoE Injectors & Extenders

LRP-101/LRP-111 series



The LRP-101/LRP-111 PoE Extender series, which sources power from the LRP switch or LRP injector, is a Single-port, 802.3at/802.3bt High Power over Ethernet Injector providing a maximum of up to 25/60 watts of power output over Ethernet cable which allows data and power to transmit simultaneously through the cable to PoE PD (Powered Device).

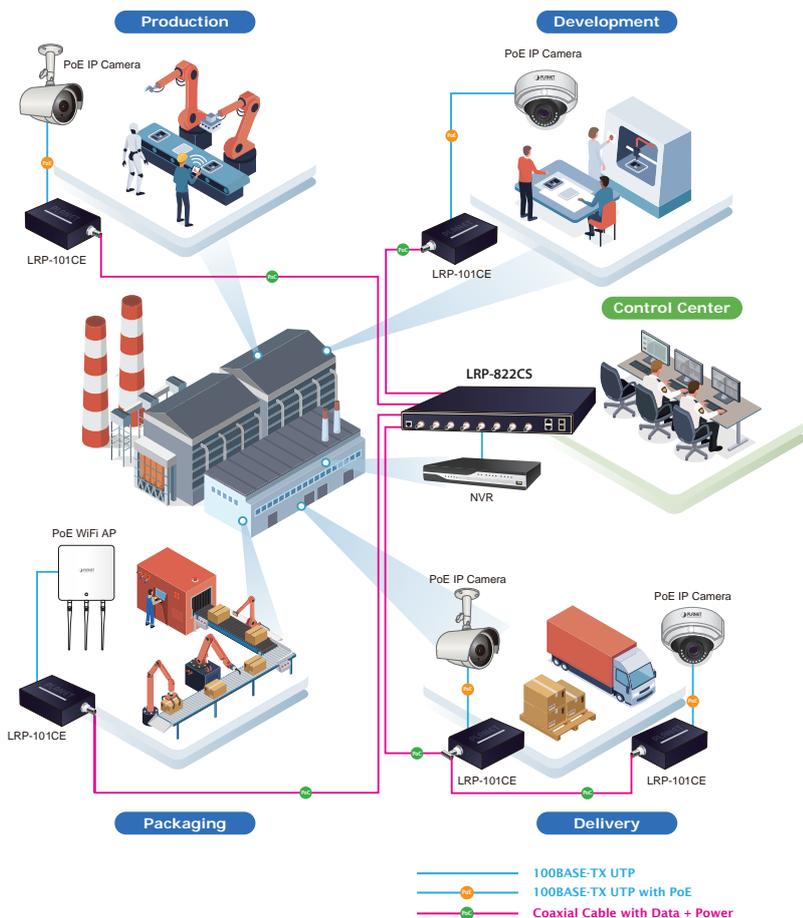

Single Port Injector

LRP-101CH

- 1-port BNC with passive PoE PSE
- 1-port 10/100TX RJ45 with 802.3at PoE+ Input
- -20 ~ 70 degrees C operating temperature
- Power over coaxial up to 1km

LRP-101UH

- 1-port UTP with passive PoE PSE
- 1-port 10/100TX RJ45 with 802.3at PoE+ Input
- -20 ~ 70 degrees C operating temperature
- Power over UTP up to 500m

LRP-111UH

- 1 Long Reach 90-watt PoE PSE Port with 100Mbps@500 meters or 10Mbps@800 meters
- 1-port 10/100TX RJ45 with 802.3bt PoE++ Input
- 48~54V DC or 802.3bt PoE++ power Input
- -40~75 degrees C operating temperature
- IP30 compact-sized case, DIN-rail or wall-mountable
- Co-works with LRP-111UE
- Power over UTP up to 800m

Single Port Extender

LRP-101CE

- 1-port BNC with passive PoE PD
- 1-port 10/100TX RJ45 with 802.3at PoE+ PSE to remote PoE IP camera/AP
- -20 ~ 70 degrees C operating temperature

LRP-101UE

- 1-port UTP with passive PoE PD
- 1-port 10/100TX RJ45 with 802.3at PoE+ PSE to remote PoE IP camera/AP
- -20 ~ 70 degrees C operating temperature

LRP-111UE

- 1 Long Reach PoE PD Port
- 1-port 10/100TX RJ45 with 60-watt 802.3bt PoE++ output
- PoE power input, no extra power adapter required
- -40~75 degrees C operating temperature
- IP30 compact-sized case, DIN-rail or wall-mountable
- Co-works with LRP-111UH

Media Conversion

All-Inclusive Fiber Optic Network Solution

Telecom



Layer 3 Chassis Switch

- ▶ CS-6303R/ CS-6306R/ CS6-S24S8X/ CS6-S16X/ CS6-S4Q

64 x 10G SFP+

16 x 40G QSFP+



Enterprise



L3 Fiber Managed Switches

- ▶ XGS3-2424Z/ SGS-6341-16S8C4XR/ XGS-6350-12X8TR/ GS-6320-46S2C4XR

12 x 10G SFP+ Max.



Data Center



Layer 3 100G Managed Switch

- ▶ XGS-6350-24X4C/ XGS-6350-48X2Q4C

24/48 x 10G SPF+

4 x 100G QSFP28



Factory



Industrial L3 Managed Switches

- ▶ IGS-6325-5X1T/ IGS-6325-8T8S/ IGS-6325-8T8S4X

4 x 10G SFP+

-40~75°C



FTTx



Metro Ethernet Switches

- ▶ MGSW-28240F/ MGSW-24160F MGSD-10080F/ MGS-6320-2T6S2X

4 x 10G SFP+ Max.

-10~60°C



Building



Commercial and Industrial 10G Media Converters

- ▶ XT-905A/ XT-915A/ XT-925A

2 x 10G SFP+ Max.

1 x 10G BASE-T RJ45



Centralized Media Converter Management



PLANET Media Converter Chassis allows the installation of up to 15 PLANET standard Media Converters with diverse choices, such as fiber, GEAPON, Ethernet, PoE, serial RS232/485 interfaces, VDSL2 and video to meet different network applications. It is very flexible for Media Converter series to be installed in the chassis for centralized media conversion management.

Web/SNMP/OAM Remote Management

For efficient management, the Managed Media Converters are equipped with remote Web interface. They also support the standard SNMP and TS-1000/802.3ah OAM protocol and can be managed via any standard management software.



Extension & Expansion

With the feature-rich chassis, the converters can easily expand the fiber-optic networks by simply plug and play. The wiring distance of PLANET Media Converter Chassis is extendable from 2 to 120 kilometers, and the Media Converter transmission distance is up to 120 kilometers.



DIN-rail Installation



Chassis Installation



Wall-mount Installation

Easy Installation

With standard cases, PLANET Media Converters provide a 3-way installation, including DIN rail, chassis and wall mount, to manage all devices more efficiently.

Built for Harsh Environments

The Industrial Media Converter Series is equipped with the slim-type IP30 metal case for easy deployment in heavy Industrial demanding environments. Being able to operate under the temperature range from -40 to 75 degrees C, the Industrial Media Converter Series can be placed in almost any difficult environment.



Managed Media Converter Chassis



For powerful advanced fiber-optic function and cost-effective solution, PLANET Managed Media Converter Chassis series, MC-1610MR/MC-1610MR48, provides 16 Media Converter slots and one management system in a 19" rack chassis. The MC-1610MR/MC-1610MR48 is designed for FTTH applications by ISPs, telecoms, campuses and enterprises.

The MC-1610MR/MC-1610MR48 helps to easily build the FTTH installation and perfectly satisfies diverse demands. The 16 slots can be flexibly applied with PLANET Fast/Gigabit Ethernet Smart Media Converter (FST-8/GST-8/XST series) to construct network solution of FTTH (Fiber to the Home), FTTB (Fiber to the Building) or FTTC (Fiber to the Curb) for ISPs, enterprises and campuses. The MC-1610MR/MC-1610MR48 is a reliable and efficient solution for network application where distance and installation budget are highly concerned.

- High-quality 19" rack-mountable chassis installation
- Bay power isolation ensures each bay is electrically isolated from each other
- Installation of up to two fans for increased air-flow for system cooling
- One 10/100/1000Mbps Ethernet port and one RS232 port for management
- LED indicators for system, power and fan status
- NTP client (Time zone setting)
- Remote syslog and local system log
- DHCP client and DNS client
- Temperature detects display and alarm
- Web firmware upgrade
- PLANET Smart Discovery Utility for deployment management
- Media link/connection speed duplex status for each converter module
- Redundant backup system (Redundant Link Media Converter)

MC-1610MR

- Console/Telnet/Web/SNMP management
- 16 hot-swappable modular converter management
- TS-1000/802.3ah OAM remote terminal management
- Two power slots for redundant power, optional AC/-48V DC supplies

MC-1610MR48

- Console/Telnet/Web/SNMP management
- 16 hot-swappable modular converter management
- TS-1000/802.3ah OAM remote terminal management
- Two power slots for redundant power, optional AC/-48V DC supplies

Web/SNMP management

- OAM
- Device Control
- Redundant Link
- Link Status Monitoring
- SNMP Trap Alarm



Hot-swappable/flexible power input



Dual AC



Dual DC



DC + AC

Power Module

Smart Gigabit Media Converters



PLANET GST-80x Smart Gigabit Media Converter series extends communication distance with high Gigabit performance via fiber optic cable. The GST-80x series provides media conversion between 10/100/1000BASE-T and 1000BASE-SX/LX interfaces such as multi-mode LC/SC connectors (220m/550m), single-mode LC/SC connectors (10/20/40/80/120km) and single fiber connectors (WDM,20/60km) for various fiber optic applications.

- Complies with IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX/LX Ethernet standard
- Choice of fiber connectors from SC, LC, WDM, multi-mode/ single-mode fiber/1000BASE-SX/LX mini GBIC module
- Auto MDI/MDIX on TP port
- LLR /LLCF for fiber connection diagnostic
- IEEE 802.3ah OAM/TS-1000 OAM
- Manageable through MC-1610MR/MC-1610MR48
- LED indicators for converter status
- 9K jumbo frame size supported
- DIP switch for fiber (auto-negotiation/manual) and LFP function (disable/enable) setting
- EMI standards complies with FCC, CE class A

Smart Fast Ethernet Media Converters



PLANET Smart Fast Ethernet Media Converter, FST-80x series, extends communication distance with highly-stable performance via fiber optic cable. The FST-80x series provides media conversion between 10/100BASE-TX and 100BASE-FX interfaces such as multi-mode ST/SC connectors (2km), single-mode SC connector (15/35/50km), single fiber connector (WDM, 20km) and fiber connection options for various applications.

- Complies with IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX and 100BASE-FX Ethernet standard
- One 10/100BASE-TX port with RJ45 connector, one 100BASE-FX port with ST/SC/WDM connector supporting multi-mode or single-mode fiber optic cable
- Auto MDI/MDIX on TP port
- LLR/LLCF for fiber connection diagnostic
- Manageable through MC-1610MR/MC-1610MR48
- LED indicators for converter status
- DIP switch to set fiber (HDX/FDX), UTP (auto-negotiation/manual), speed (10/100Mbps), duplex mode (half/full duplex mode), LLR (disable/enable), LLCF (disable/enable), flow control (disable/enable) and LFP function (disable/enable)
- EMI standards complies with FCC, CE class B

GST-802

- One 1000BASE-SX port with SC connector
- Supports fiber optic up to 550m

GST-802S

- One 1000BASE-LX port with SC connector
- Supports fiber optic up to 20km

GST-805A

- One 1000BASE-SX/LX SFP slot
- Supports fiber optic up to 120km (Vary on SFP module)

GST-806A15

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 20km

GST-806B15

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 20km

GST-806A60

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 60km

GST-806B60

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 60km

FST-801

- One 100BASE-FX port with ST connector
- Supports fiber optic up to 2km

FST-802

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 2km

FST-802S15

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 15km

FST-802S35

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 35km

FST-802S50

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 50km

FST-806A20

- One 100BASE-FX port with WDM connector
- Supports fiber optic up to 20km

FST-806B20

- One 100BASE-FX port with WDM connector
- Supports fiber optic up to 20km

Smart 10Gigabit Media Converters



With target applications including 1Gbps, 2.5Gbps, 5Gbps and 10G Ethernet switching, PLANET XST-705A Smart 10Gigabit Media Converter is ideal for wide applications for copper to fiber media conversion wherever 10Gigabit bandwidth is required.

The XST-705A has one RJ45 port and one SFP+ slot. It supports 10Gigabit Ethernet conversion from copper 10GBASE-T to fiber multi-mode or single-mode, utilizing 10GBASE-SR or 10GBASE-LR SFP+ transceiver installed in the SFP+ slot to extend distances to server switches and patch panels. The deployment distance can be extended from 300 meters (multi-mode) to up to 80 kilometers (single-mode).

The XST-705A is designed for use in network environments where the ultra-high bandwidth provided by 10Gigabit Ethernet is required, for example, data center cloud computing, enterprise backbones, campus networks, and carrier infrastructure.

XST-705A

- One 10GBASE-X SFP+ slot, supporting up to 80km (Vary on SFP module)
- One 10G/5G/2.5G/1G/100M RJ45 copper port
- Complies with IEEE 802.3ae 10GBASE-R
- NBASE-T featuring adaptive rate operation
- 100 meters over Cat 6.A at 10Gbps
- Low power consumption
- Manageable through MC-1610MR/ MC-1610MR48

Media Converter Chassis



Offering more capacity to the converters in one chassis, PLANET MC-700/MC-1500 provides 7/15 slots in the 10"-19" rack saving more spaces for fiber-optic wiring yet simplifying the maintenance of media conversion. It allows the connectivity of up to 7-/15-slot PLANET Fast Ethernet, Gigabit Ethernet or VDSL2 Converters in one chassis. One fan with LED indicators for the system cooling is also available.

Providing redundant power to gain more reliable media conversions, the MC-1500R/MC-1500R48 offers 15 slots for PLANET's full-ranging Media Converter series and 2 slots for 130W or DC -48V redundant power supply. It allows the connectivity of up to 15 PLANET Fast Ethernet, Gigabit Ethernet or VDSL2 Converters in one chassis. Two fans with LED indicators for the system cooling are also available.

The MC-700, MC-1500, MC-1500R and MC-1500R48 offer flexibility in installation and cost-effective scalable solution. With an independent power supply on each slot of the MC-700, MC-1500, MC-1500R and MC-1500R48, any converter is hot-swappable without causing an interruption to other converters. The Media Converters and power modules can be plugged and played anytime. Each bay of the Media Converter Chassis can be populated with any of PLANET's Media Converter series, the FT, GT, VC-23x and ICS, which provide media conversion between fiber optic, phone wire and serial to copper lines.

- High-quality 10"/19" rack-mountable chassis installation
- Bay power isolation ensures each bay is electrically isolated from each other
- Power protection: protection from over voltage, over current and short circuit
- One/two built-in fans for hardware cooling
- Supplies the converters and power modules to be plugged and played
- Reduces the effort of converter maintenance and management and diagnose the status at one time
- FCC Part 15 Class A, CE

MC-700

- 7-slot hot-swappable
- LED indicators for system status monitoring
- Built-in AC power supply unit



MC-1500

- 15-slot hot-swappable
- LED indicators for system status monitoring
- Built-in AC power supply unit



MC-1500R

- 15-slot hot-swappable
- LED indicators for system status monitoring
- One AC 100-240V power input
- Redundant power supply with option of 100-240V AC or -48V DC



MC-1500R48

- 15-slot hot-swappable
- LED indicators for system status monitoring
- One DC -48V power input
- Redundant power supply with option of 100-240V AC or -48V DC



MC-1500R Rear Panel

10G Media Managed Converters



PLANET XT-900 series high-performance media converter improves network connectivity and provides sophisticated management capabilities. It is the first 10G media converter in the industry with standalone secure management, making it the best option for enterprise and telecom remote management and monitoring. The XT-900 series allows for remote management via an intuitive web interface, command line interface (CLI) and SNMP protocol, enabling easy monitoring and configuration of the converter from anywhere.

Our cutting-edge converter features one 10GBASE-T copper port and two 10G SFP+ ports, providing ultra-fast connectivity for devices with RJ45 interfaces as well as greater flexibility in fiber-optic cabling options. This powerful yet compact solution makes it the ideal choice for businesses looking to boost their network speed and functionality.

With target applications including 10Gbps Ethernet switching and aggregation, PLANET's IXT-900 series is ideal for scenarios needing high-bandwidth data transmission. These converters are especially suitable for environments such as data centers, campus backbones, and ISP networks.

The IXT-900 series features one RJ45 port and two SFP+ slots, allowing for 10G Ethernet media conversion from copper to fiber, with distances extended from 300 meters (multi-mode) to 80 kilometers (single-mode). Additionally, models like IXT-900-1X1UP and IXT-900-2X1UP support IEEE 802.3bt PoE++, providing up to 95W per port—ideal for high-consumption devices like IP cameras and access points.

Designed for demanding environments, the IXT-900 series operates from -40 to 75°C, with an IP40 case to resist electromagnetic interference. Its rugged design ensures reliable performance on factory floors and in outdoor cabinets.

XT-905A

- One 10GBASE-X port
- One 10G/5G/2.5G/1G/100M RJ45 copper
- Support Link-Fault Pass-through (LFP) feature
- Support the IEEE 802.1Q VLAN standard
- Web, CLI and SNMP management
- Supports ITU-G.8032 Ethernet Ring Protection Switch (ERPS)

XT-915A

- Two 10GBASE-X ports double the Distance of Deployment
- Support Link-Fault Pass-through (LFP) feature
- Support the IEEE 802.1Q VLAN standard
- Web, CLI and SNMP management
- Supports ITU-G.8032 Ethernet Ring Protection Switch (ERPS)

XT-925A

- Two 10GBASE-X ports double the Distance of Deployment
- One 10G/5G/2.5G/1G/100M RJ45 copper
- Support Link-Fault Pass-through (LFP) feature
- Support the IEEE 802.1Q VLAN standard
- Web, CLI and SNMP management
- Supports ITU-G.8032 Ethernet Ring Protection Switch (ERPS)

IXT-900-1X1T/IXT-900-2X1T

- One/Two 10GBASE-X SFP+ port
- One 10G/5G/2.5G/1G/100BASE-T RJ45 port
- Supports Link Fault Pass-through (LFP) for quick fault detection
- Compliant with IEEE 802.1Q VLAN standard
- Web, CLI, and SNMP management interfaces
- Supports ITU-T G.8032 Ethernet Ring Protection Switching (ERPS)

IXT-900-2X

- Two 10GBASE-X SFP+ fiber ports
- Supports single-mode and multi-mode conversion up to 80km
- Link Fault Pass-through (LFP) feature for enhanced fault detection
- Compliant with IEEE 802.1Q VLAN standard
- Supports ITU-T G.8032 Ethernet Ring Protection Switching (ERPS)
- IPv4/IPv6 dual-stack management for flexible network integration

IXT-900-2X1PD

- Two 10GBASE-X SFP+ ports and one 10G/5G/2.5G/1G/100BASE-T RJ45 port with PoE PD support
- Supports Link Fault Pass-through (LFP) for enhanced fault detection
- Compliant with IEEE 802.1Q VLAN standard
- IPv4/IPv6 dual stack management for flexible network integration
- Supports ITU-T G.8032 Ethernet Ring Protection Switching (ERPS)
- Designed for operation in extreme environments (-40 to 75°C)

IXT-900-1X1UP/IXT-900-2X1UP

- One/Two 10G/5G/2.5G/1G/100BASE-T RJ45 port with IEEE 802.3bt PoE++ support
- One 10GBASE-X SFP+ port
- Intelligent PoE alive check and scheduled power recycling to enhance reliability
- Supports Link Fault Pass-through (LFP) for fast fault detection
- IPv4/IPv6 dual-stack management
- Supports ITU-T G.8032 Ethernet Ring Protection Switching (ERPS)
- Environmentally hardened design for temperatures ranging from -40 to 75°C

10G Ethernet Media Converter



With target applications including 1Gbps, 2.5Gbps, 5Gbps and 10G Ethernet switching and aggregation, PLANET IXT and XT 10G Media converter series is ideal for wide applications for copper to fiber media conversion wherever 10Gigabit bandwidth is required.

The IXT and XT series has one RJ45 port and one SFP+ slot. It supports 10Gigabit Ethernet media conversion from copper 10GBASE-T to fiber multi-mode or single-mode, utilizing 10GBASE-SR or 10GBASE-LR SFP+ transceiver installed in the SFP+ slot to extend distances to servers, switches and patch panels. The deployment distance can be extended from 300 meters (multi-mode) to up to 80 kilometers (single-mode).

The IXT series is designed for use in network environments where the ultra-high bandwidth provided by 10Gigabit Ethernet is required, for example, data center cloud computing, enterprise backbones, campus networks, and carrier infrastructure.

XT-705A

- One 10GBASE-X SFP+ slot
- One 10G/5G/2.5G/1G/100M RJ45 copper
- Complies with IEEE 802.3ae 10GBASE-R
- NBASE-T featuring adaptive rate operation
- 100 meters over Cat 6A at 10Gbps
- Low power consumption
- Compact size; compatible with MC-700/ MC-1500 Chassis

10G SFP+ NBASE-T

XT-715A

- One 10GBASE-X SFP+ slot
- One 10G/5G/2.5G RJ45 copper
- Complies with IEEE 802.3ae 10GBASE-R
- NBASE-T featuring adaptive rate operation
- 100 meters over Cat 6A at 10Gbps
- Low power consumption
- Compact size; compatible with MC-700/ MC-1500 Chassis

XT-815A

- Two 10G/2.5G/1GBASE-X SFP+ slots
- Complies with IEEE 802.3ae 10GBASE-R
- Low power consumption
- Compact size; compatible with MC-700/ MC-1500 Chassis

IXT-705AT

- One 10GBASE-X SFP+ slot
- One 10G/5G/2.5G/1G/100M RJ45 copper
- Complies with IEEE 802.3ae 10GBASE-R
- NBASE-T featuring adaptive rate operation
- 100 meters over Cat 6A at 10Gbps
- -40~75 degrees C operating temperature
- IP30 metal case
- Low power consumption

10G SFP+ NBASE-T

IXT-815AT

- Two 10G/2.5G/1GBASE-X SFP+ slots
- Complies with IEEE 802.3ae 10GBASE-R
- Low power consumption
- Compact size; Low power consumption
- -40~75 degrees C operating temperature
- IP30 metal case

Gigabit Managed Media Converters



PLANET GT-91x series provides much flexibility with all kinds of 10/100/1000Mbps Ethernet Media on RJ45 port and offers highly stable Gigabit fiber performance. It supports conversion between 10/100/1000BASE-T and 1000BASE-LX/SX network, which includes SFP/WDM connectors with single-mode or multi-mode media as required.

For efficient management, PLANET GT-91x Managed Gigabit Ethernet Media Converter series is equipped with remote Web/SNMP interface. With its built-in Web-based management, PLANET GT-91x series acts as an easy-to-use, platform-independent management and configuration facility.

- Complies with IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, 100BASE-FX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX/LX
- Choice of fiber connectors: LC, WDM, multi-mode/single-mode
- LED indicators for easy network diagnostics
- Auto MDI/MDIX on TP port
- IP-based web interface
- SNMP v1/v2c monitor
- 802.1Q/Q-in-Q/Management VLAN
- Maximum frame size up to 16K bytes
- TS-1000 OAM/IEEE 802.3ah OAM/Loop Back Test
- Compact in size, easy installation
- 10-/19-inch chassis compatibility (MC-700/MC-1500/MC-1500R/MC-1500R48)

Gigabit Media Converters



For the flexibility of all kinds of 10/100/1000Mbps Ethernet Media on RJ45 port and highly-stable Gigabit fiber performance, PLANET GT-802, GT-802S, GT-805A and GT-806A/B series and GT-1205A Gigabit Ethernet Media Converter extend communication distance with Gigabit performance via fiber optic cable. The GT-80x series and GT-1205A provide media conversion between 10/100/1000BASE-T and 1000BASE-SX/LX interfaces for various fiber optic applications.

- Complies with IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX, IEEE 802.3ab 1000BASE-T, IEEE 802.3z 1000BASE-SX/LX
- IEEE 802.3x full-duplex flow-control and back-pressure in half-duplex eliminate the loss of packets
- Auto MDI/MDIX on TP port
- 9K jumbo frame
- OAM terminal (TS-1000 and IEEE 802.3ah)
- LED indicators for easy network diagnostics
- External 5V/2A DC power supply
- Wall mounting and DIN-rail supported
- Compact in size, easy installation
- 10-/19-inch chassis compatibility (MC-700/MC-1500/MC-1500R/MC-1500R48)

GT-915A

- One 1000BASE-SX/LX SFP slot
- Supports fiber optic up to 120km (depending on SFP module)

GT-802/GT-802S

- One 1000BASE-SX port with SC connector
- Supports fiber optic up to 550m
- Supports fiber optic up to 20km

GT-805A

- One 1000BASE-SX/LX SFP slot
- Supports fiber optic up to 120km (Vary on SFP module)

GT-806A15/GT-806B15

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 20km

GT-806A40/GT-806B40

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 40km

GT-806A60/GT-806B60

- One 1000BASE-LX port with WDM connector
- Supports fiber optic up to 60km

GT-1205A

- Dual 100/1000BASE-X mini-GBIC SFP slot
- DIP Switch for 100FX or 1000X SFP supports on dual SFP slots
- Supports fiber optic up to 120km (depending on SFP module)
- One 10/100/1000BASE-T Copper Port
- 3-port switch mode or redundant mode
- Hardware fiber port redundancy
- IEEE 802.3x flow control

GT-805A-PD

- PoE Powered
- Compliant with 802.3af/at
- PoE/5V DC dual power input
- One 1000BASE-SX/LX SFP slot
- Supports fiber optic up to 120km (Vary on SFP module)

Gigabit PoE Media Converters



As more demand for PoE powered devices needs higher power input and long distance transmission, PLANET GTP-805A/GUP-805A-60W/GUP-805A-95W PoE Media converter series is an ideal solution for this kind of PoE applications.

The GTP-805A IEEE 802.3at PoE+ media converter supports a maximum of 30-watt PoE output. The GUP-805A-60W and GUP-805A-95W IEEE 802.bt PoE++ are capable to source up to 60 watts and 95 watts of power by using all the four pairs of standard Cat5e/6 Ethernet cabling to deliver power and full-speed data to each remote PoE-compliant powered device (PD).

With complete power budget solutions of 30 watts ,60 watts and 95 watts for different kinds of PoE applications, the GTP-805A, GUP-805A-60W and GUP-805A-95W provide a quick, safe and 802.3at PoE+/802.3bt PoE++ network solution for small businesses and enterprises.

GTP-805A

- One 100/1000BASE-X SFP slot
- Supports fiber optic up to 120km (vary on SFP module)
- One 10/100/1000BASE-T Port with IEEE 802.3 at PoE+ 30W Power output

GUP-805A-60W

- One 100/1000BASE-X SFP Slot
- Supports fiber optic up to 120km (vary on SFP module)
- One 10/100/1000BASE-T Port with IEEE 802.3 bt PoE++ 60W Power output

GUP-805A-95W

- One 100/1000BASE-X SFP Slot
- Supports fiber optic up to 120km (vary on SFP module)
- One 10/100/1000BASE-T Port with IEEE 802.3 at PoE++95W Power output

Fast Ethernet Media Converters



PLANET FT-80x series is a Fast Ethernet Bridge 100BASE-FX fiber to 10/100BASE-TX shielded twisted pair (STP) converter. It supports both half-duplex and full-duplex operations and a variety of fiber options. The converter automatically adapts to the highest level of performance supported by the device connected to the STP port.

- Complies with IEEE 802.3, IEEE 802.3u 10/100BASE-TX, 100BASE-FX
- IEEE 802.3x full-duplex flow-control and back-pressure in half-duplex eliminate the loss of packets
- Auto MDI/MDIX on TP port
- Rear DIP switch for FX duplex mode selection
- Side DIP switch for LFP mode selection
- LED indicators for easy network diagnostics
- External 5V/2A DC power supply
- Wall mounting and DIN-rail supported
- Compact in size, easy installation
- 10-/19-inch chassis compatibility (MC-700/MC-1500/MC-1500R/MC-1500R48)

FT-801

- One 100BASE-FX port with ST connector
- Supports fiber optic up to 2km

FT-802

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 2km

FT-802S15

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 15km

FT-802S35/FT-802S50

- One 100BASE-FX port with SC connector
- Supports fiber optic up to 35km
- Supports fiber optic up to 50km

FT-806A20/FT-806B20

- One 100BASE-FX port with WDM connector
- Supports fiber optic up to 20km

FT-806A60/FT-806B60

- One 100BASE-FX port with WDM connector
- Supports fiber optic up to 60km


VDSL2 Media Converters



PLANET VC series is Ethernet-over-VDSL2 Media Converter with high performance. It is based on two core networking technologies, Ethernet and VDSL2 (Very-high data-rate Digital Subscriber Line 2). The VDSL2 technology offers the absolutely fastest data transmission speeds over the existing copper telephone lines without the need of rewiring.

The VC series can be used as a standalone unit when powered by its DC adapter or used as a slide-in module to PLANET 10-/19-inch 7-/15-slot Media Converter Chassis (MC-700/MC-1500/MC-1500R/MC-1500R48).

- Complies with IEEE 802.3 10BASE-T, IEEE 802.3u 100BASE-TX and IEEE 802.3x flow control Ethernet standards
- CO/CPE selectable via DIP switch
- DMT (Discrete Multi-Tone) line coding
- IEEE 802.1Q VLAN tag transparent, 1536 bytes packet size support
- LED indicators for easy network diagnostics
- External DC 5V 2A power supply
- Wall mounting and DIN-rail supported
- Compact in size, easy installation
- 10-/19-inch chassis compatibility (MC-700/MC-1500/MC-1500R/MC-1500R48)

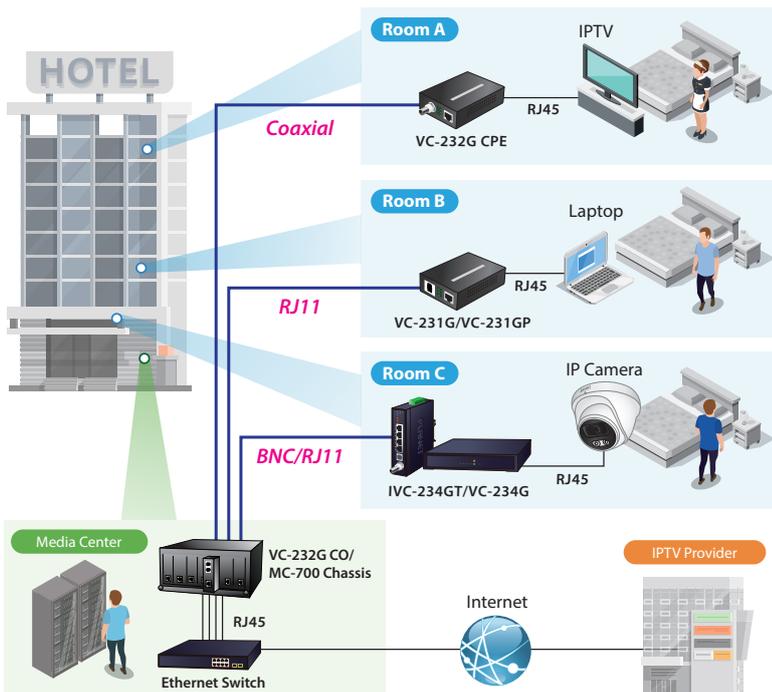

VC-231

- ITU-T G.993.2 VDSL2 (Profile 17a/30a)
- One RJ11 connector for VDSL2 connection with up to 1.4km distance support

VC-231G/VC-231GP

- One RJ11 connector for VDSL2 connection
- One 10/100/1000BASE-T RJ45
- Supports ITU-T G.993.2 VDSL2 Profile 17a/30a/35b
- ITU-T G.993.5 G.vectoring and G.INP
- Upstream/Downstream bandwidth up to 200/100Mbps
- CO/CPE mode selectable via DIP switch
- Selectable target band plan and SNR margin
- 30-watt 802.3at PoE+ PSE (VC-231GP)

VC-232G

- One BNC connector for VDSL2 connection
- Uses existing RG59/RG6 coaxial cable
- One 10/100/1000BASE-T RJ45
- ITU-T G.993.5 G.vectoring and G.INP
- Supports ITU-T G.993.2 VDSL2 Profile 17a/30a/35b
- Upstream/Downstream bandwidth up to 200/100Mbps
- CO/CPE mode selectable via DIP switch
- Selectable target band plan and SNR margin

VC-234G/IVC-234GT

- One RJ11 connector for VDSL2 connection
- One phone connector for telephone connection
- Four 10/100/1000BASE-T RJ45
- Supports ITU-T G.993.2 VDSL2 Profile 17a/30a/35b
- ITU-T G.993.5 G.vectoring and G.INP
- Upstream/Downstream bandwidth up to 200/100Mbps
- CO/CPE mode selectable via DIP switch
- Selectable target band plan and SNR margin
- -40 to 75 degrees C operating temperature (IVC-234GT)

VC-231GF

- One RJ11 connector for VDSL2 connection
- One 1000BASE-X SFP
- ITU-T G.993.5 G.vectoring and G.INP
- Upstream/Downstream bandwidth up to 200/100Mbps
- CO/CPE mode selectable via DIP switch
- Selectable target band plan and SNR margin

IVC-234GPT

- One RJ11 connector for VDSL2 connection
- One phone connector for telephone connection
- Four 10/100/1000BASE-T RJ45, 30-watt 802.3at PoE+ PSE
- Supports ITU-T G.993.2 VDSL2 Profile 17a/30a/35b
- ITU-T G.993.5 G.vectoring and G.INP
- Upstream/Downstream bandwidth up to 200/100Mbps
- CO/CPE mode selectable via DIP switch
- Selectable target band plan and SNR margin
- -40 to 75 degrees C operating temperature

Serial over Ethernet Media Converters



PLANET ICS-10x Media Converter/Device Server series can convert Serial RS232/RS422/RS485 communication interface over Fast Ethernet networking. There are RJ45 and SC type connectors and single-mode/multi-mode media for customers' needs. Ethernet signal allows two types of segments to connect easily and efficiently.

- Complies with IEEE 802.3, IEEE 802.3u 10/100BASE-TX, 100BASE-FX standard
- Choice of fiber connectors: SC/LC, multi-mode/single-mode fiber
- IP-based web interface
- SMTP e-mail for alarm notification of events
- LED indicators for easy network diagnostics
- PLANET Smart Discovery utility finds ICS-10x devices on the network automatically
- Firmware upgrade via HTTP protocol
- Reset button on the front panel for reset to factory default
- Wall mounting and DIN-rail supported
- Compact in size, easy installation
- 10-/19-inch chassis compatibility (MC-700/MC-1500/MC-1500R/MC-1500R48)

ICS-110

- One DB9 interface supports RS232, 2-wire RS485, 4-wire RS485 and RS422 operation
- 1-port 10/100BASE-TX RJ45 interface with auto MDI/MDI-X function


ICS-115A

- One DB9 interface supports RS232, 2-wire RS485, 4-wire RS485 and RS422 operation
- 1-port 100BASE-FX SFP slot


ICS-120

- Two DB9 interfaces support RS232, 2-wire RS485, 4-wire RS485 and RS422 operation
- 1-port 10/100BASE-TX

Standalone Installation - Device Gateway Server

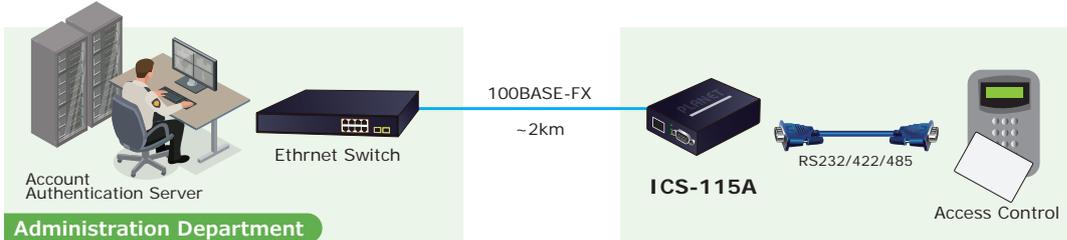

Pair Connection - Local to Remote Serial Extension

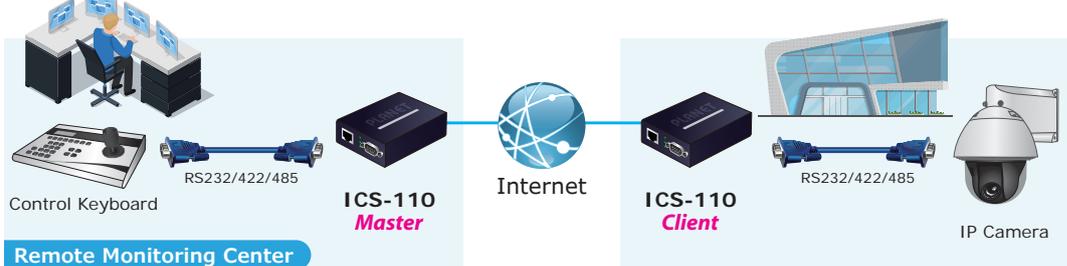

RS422/RS485 Modbus Gateway



PLANET MG-11x/MGS-12x 1/2-port RS232/422/485 Modbus Gateway supports converting any Modbus Protocols between Modbus TCP, Modbus RTU, and Modbus ASCII for all supported hardware interfaces. Its serial protocol can be used for industrial automation where SCADA or HMI system is in place, which brings interconnection over Ethernet longer distances, thus making a network infrastructure more flexible.

- Complies with IEEE 802.3, IEEE 802.3u 10/100BASE-TX, 100BASE-FX Standard
- 10/100TX RJ45 and 100FX SFP Interfaces
- Built-in IP-based Web interface
- Modbus TCP, Modbus RTU, Modbus ASCII, IP, ARP, DHCP and DNS
- RTU Master, RTU Slave, ASCII Master, and ASCII Slave serial operation modes
- Master mode supports 32 slave TCP connection requests
- Slave mode supports 32 TCP master connections
- Firmware upgrade/configuration backup and restore via HTTP protocol
- Reset button for resetting to factory default
- Wall-mount or DIN-rail installation
- -10 to 60 degrees C operating temperature
- 10-/19-inch chassis compatibility (MC-700/MC-1500/MC-1500R/MC-1500R48)

Video over Fiber Optic Converters



PLANET has developed the video over Gigabit fiber media converter kit, VF-101G/102G/106G/402-KIT, which is ideal for extending the distance and signal conversion by transmitting the AHD/TVI/CVI/CVBS video and data over the fiber-optic cable.

The VF-10xG series and VF-402 include different types of fiber connectors such as ST, FC and WDM-SC which enable CCTV applications to replace the traditional coaxial cable with stable fiber cable performing more efficiently.

Adopting the intelligent encoding/decoding technology and with the compact box, the VF-10xG-KIT video over fiber media converter series enables videos to be delivered in high quality over a distance of up to 20km long.

- High-speed synchronous digital transmission technology
- 8-/10-bit digital video signal sampling
- Data type: RS485
- PAL, NTSC, SECAM compatible
- Long-distance data transmission of 20km
- Guarantees safe transmission under poor electromagnetic environment
- Compliant with hybrid video (AHD/TVI/CVI/CVBS)
- Compact size, wall mounting and DIN-rail supported, easy installation
- Standalone or work with PLANET MC-700/1500/1500R media converter chassis (For VF-10XG series)

MG-110

- One DB9 interface supports RS232, 2-wire RS485, 4-wire RS485 and RS422 operation
- 1-port 10/100BASE-TX RJ45 with auto MDI/MDI-X function

MG-115A

- One DB9 interface supports RS232, 2-wire RS485, 4-wire RS485 and RS422 operation
- 1-port 100BASE-FX SFP

MG-120

- Two DB9 interfaces support RS232, 2-wire RS485, 4-wire RS485 and RS422 operation
- 1-port 10/100BASE-TX RJ45 with auto MDI/MDI-X function

VF-101G-KIT

- Compliant with hybrid video (AHD/TVI/CVI/CVBS)
- ST multi-mode fiber connector
- Long-distance data transmission of 20km
- Wide temperature range from -25 to 70 degrees C

VF-102G-KIT

- Compliant with hybrid video (AHD/TVI/CVI/CVBS)
- FC multi-mode fiber connector
- Long-distance data transmission of 20km
- Wide temperature range from -25 to 70 degrees C

VF-106G-KIT

- Compliant with hybrid video (AHD/TVI/CVI/CVBS)
- WDM-SC multi-mode fiber connector
- Long-distance data transmission of 20km
- Wide temperature range from -25 to 70 degrees C

VF-402-KIT

- Compliant with hybrid video (AHD/TVI/CVI/CVBS)
- FC multi-mode fiber connector
- Long-distance data transmission of 20km
- Wide temperature range from -20 to 70 degrees C
- Fiber optic transmission of four video signals on one fiber with RS485 data signals

Broadband Communications



High-Performance Internet Solution for FTTx and Triple Play Applications

XGS-PON/GPON



XGS-PON/GPON ONT and HGU

VDSL2



VDSL2 Converter



IPTV



Internet



Online Gaming



VoIP via Wi-Fi

PLANET Last Mile Transmission Solution provides not only CO (Central Office) side of equipment for ISPs but also CPE (Customer Premises Equipment) side of device for end users. Its high bandwidth certainly meets the requirements of triple play devices for today's home entertainment and communications.



Delivering Highly-demanding Connectivity for ISPs/Triple Play Devices

With the capability of 200/200Mbps symmetric data transmission, PLANET VDSL2 Solution enables many multi-media services, such as VoD (Video on Demand), Voice over IP, video phone, IPTV, Internet caching server, distance education and so on, to work on the Internet without any reservation.

10Gbps High-speed and 20km Long-distance Coverage for Triple Play Services

PLANET XGS-PON Solution provides a high bandwidth of up to 10Gbps for both upstream and downstream, and a long-distance coverage of up to 20km between equipment nodes for network deployment, thereby meeting the demand of increasing home multimedia and entertainment.



XGS-PON / XG-PON

XGPL-16000

- 16 XGS-PON ports, up to 256 ONTs/HGUs per port, 10Gbps speeds
- Complies with ITU-T G.9807.1, G.987 and G.988
- 8x10G SFP+ & 2x100G uplinks for high-capacity backbone
- Distance up to 20km
- Layer-2 features: VLAN, LACP, STP, ERPS, mirroring, loop protection
- User-friendly CLI, Telnet, SNMP, Web management
- Optional redundant power design with dual-AC or AC+DC supported



XGPN-400AXV

- 4 Gigabit Ethernet ports, 1 voice port
- 1 SC/UPC type XG-PON port, 10Gbps download, 2.5Gbps upload
- Compatible with 802.11ax Wi-Fi 6 wireless speed up to 3000Mbps, supports dual-band 2.4GHz and 5GHz
- Distance up to 20km
- VLAN and QoS help separate networks and manage traffic easily
- Easy remote management via web, TELNET, TR-069, OMCI/OAM, supports firmware upgrades



XGPN-100

- 1-port XGS-PON with 10Gbps up/downstream speeds
- Complies with ITU-T G.987.3, G.988, G.989
- Distance up to 20km
- Supports VLAN, QoS, and IGMP/MLD snooping
- Multiple operation modes: routing, bridging, hybrid
- Web, TR-069, OMCI remote management
- Supports firmware upgrades by web, TFTP, TR-069, or OLT



xPON

CS6-16PON4C4SX

- 16 GPON ports, each connects up to 128 ONT/HGU, maximum 20km distance.
- Speeds up to 2.5Gbps download and 1.25Gbps upload per port
- 4 Gigabit RJ45, 8 Gigabit SFP, and 4 10G SFP+ uplink ports
- Hot-swappable modules and redundant power, strong reliability
- Easy web interface and multiple management options
- Layer 2 switching: VLAN, aggregation, spanning tree, ERPS, mirroring, loop protection
- Security features: 802.1x, RADIUS, ACL, DHCP and ARP protection, IP Source Guard



GPN-SFP

- SC/APC type GPON port for easy fiber connectivity
- Supports up to 2.5Gbps downstream and 1.25Gbps upstream speeds
- Transmission distance up to 20km
- Fully compliant with ITU-T G.984/988 standards
- Low power consumption: less than 2.5W
- High-sensitivity optical receiver (-28dBm or better)
- IGMP/MLD snooping for efficient multicast management
- Plug & Play design for quick deployment and easy installation



GPN-400AXV

- Built-in 4-port 10/100/1000Mbps Ethernet switch
- 2 FXS ports for VoIP communication
- 1 USB 2.0 port for configuration backup
- Complies with ITU-T G.984/G.988
- Up to 2.5Gbps downstream and 1.25Gbps upstream
- Supports IEEE 802.11ax/ac/n wireless technology
- Dual-band Wi-Fi 6 with total wireless data rate up to 3000Mbps



GPL-8000

- 8 PON ports, 8 1G SFP ports, 8 1G/10G SFP+ ports and 4 Gigabit RJ45 interfaces
- Complies with ITU-T G.984/G.988
- Per PON supports 128 ONT/HGU devices
- Asymmetric downlink 2.5Gbps/uplink 1.25Gbps
- Distance up to 20km
- IEEE 802.1Q tagged VLAN and Q-in-Q VLAN supported
- User-friendly GUI management
- Optional redundant power design with dual-AC or AC+DC supported



GPN-100

- One 10/100/1000 RJ45 port
- Up to 2.5Gbps downstream and 1.25Gbps upstream
- Distance up to 20km
- Compliant with ITU-T G.984/988
- Supports IGMP snooping and SLA
- Supports DBA and QoS



EPL-SPT-8/EPL-SPT-32/ EPL-SPT-64

- 1 : 8 high split ratio (EPL-SPT-8)
- 1 : 32 high split ratio (EPL-SPT-32)
- 1 : 64 high split ratio (EPL-SPT-64)
- Wide operating wavelength: 1260nm to 1650nm
- Wide operating temperature: -40 to 85 degrees C



VDSL2 Bridges/Routers




High-Performance VDSL2 Data Rate over Existing Phone Lines

PLANET 30a/35b VDSL2 Solution contains various VDSL2 CPE (customer premises equipment) models for telecoms, ISPs (internet service providers), SIs (system integrators), IP surveillance providers, etc. It is based on two core networking technologies -- Ethernet and VDSL2 (very-high-data-rate digital subscriber line 2). The total VDSL2 solution offers the absolutely fastest data transmission speeds over the existing copper telephone lines without the need of rewiring. The ideal xDSL technology provides the best solution to the last-mile connectivity.



Ethernet over VDSL2 Converter

- One box design, CO/CPE selectable via DIP switch
- ITU-T G.993.2 VDSL2 (Profile 17a/30a/35b)
- Built-in POTS splitter
- Compact in size, easy installation
- 10-/19-inch chassis compatible (MC-700/MC-1500/1500R)

VDSL2 Cabling for IP Surveillance

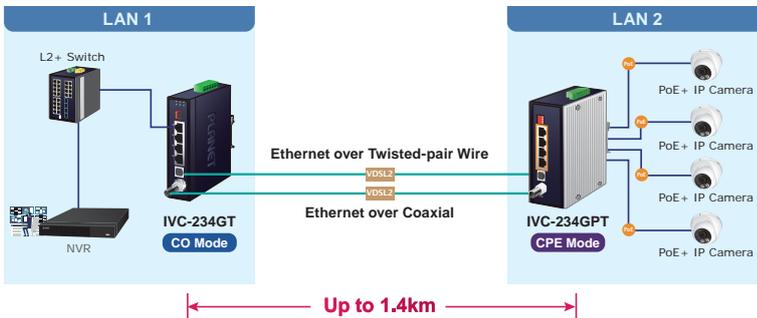

Multi-LAN Connection

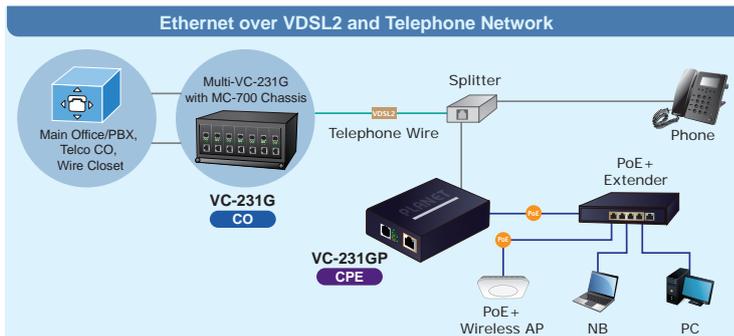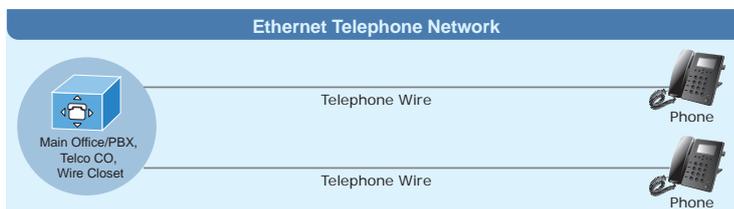

VC-231

High bandwidth 10/100TX over VDSL2 Media Converter

- VDSL2 ITU-T G.993.2 30a profile
- 100/100Mbps download/upload @1000ft
- 1-port 10/100BASE-TX RJ45

VC-234

High bandwidth 4-port 10/100TX to VDSL2 Bridge

- VDSL2 ITU-T G.993.2 30a profile
- 100/100Mbps download/upload @1000ft
- 4-port 10/100BASE-TX RJ45

VC-231G/VC-231GP

1-port 10/100/1000T Ethernet over VDSL2 Media Converter

- One RJ11 connector for VDSL connection
- One 10/100/1000BASE-T RJ45
- ITU-T G.993.5 G.vectoring and G.INP
- Upstream/Downstream bandwidth up to 200/200Mbps
- CO/CPE mode selectable via DIP switch
- Selectable target band plan and SNR margin
- 30-watt 802.3at PoE+ PSE (VC-231GP)

VC-232G

1-port 10/100/1000T Ethernet over Coaxial Media Converter

- One BNC connector for VDSL connection
- Uses existing RG59/RG6 coaxial cable
- One 10/100/1000BASE-T RJ45
- ITU-T G.993.5 G.vectoring and G.INP
- Upstream/Downstream bandwidth up to 200/200Mbps
- CO/CPE mode selectable via DIP switch
- Selectable target band plan and SNR margin

VC-234G/IVC-234GT

4-port 10/100/1000T Ethernet to VDSL2 Bridge

- One RJ11 connector for VDSL connection
- One phone connector for telephone connection
- Four 10/100/1000BASE-T RJ45
- ITU-T G.993.5 G.vectoring and G.INP
- Upstream/Downstream bandwidth up to 200/200Mbps
- CO/CPE mode selectable via DIP switch
- Selectable target band plan and SNR margin

IVC-234GPT

Industrial 4-Port 10/100/1000T 802.3at PoE+ to VDSL2 Extender

- One RJ11 & BNC connector for VDSL connection
- Four 10/100/1000BASE-T RJ45 with 30-watt 802.3at PoE+ PSE
- 120-watt PoE budget
- ITU-T G.993.5 G.vectoring and G.INP
- Upstream/Downstream bandwidth up to 200/200Mbps
- CO/CPE mode selectable via DIP switch
- Selectable target band plan and SNR margin

Wireless LAN



Comprehensive Centralized **Wireless AP** Management Solution

Optimizing Wireless Network within Minutes



Indoor Managed Access Points



Outdoor Managed Access Points



Industrial Managed Access Points



Centralized Wireless LAN Management via Network Management System

Designed for large-scale wireless network in smart cities, such as hotels, shopping malls, SMBs, buildings and any public area, PLANET's Centralized Wireless LAN Management Solution can centrally manage up to 1,02,400 indoor and outdoor wireless APs via PLANET's Universal Network Management System (UNI-NMS) or DDNS cloud portal.



Efficient AP Positioning

With the simplified Cluster AP management including Multi SSIDs, Zone Plan and Google Map, the administrator can automatically discover, configure, monitor and locate all the managed APs without configuring each AP one by one, thus greatly optimizing the wireless network performance.

Comprehensive and User-friendly AP Control

PLANET's Centralized Wireless LAN Management Solution provides the browser-based dashboard and graphical data analysis to show the administrator valuable wireless network information at a glance. Moreover, the Wireless Controllers come with an intuitive color touch LCD or LCD control that help the administrator to monitor APs and wireless network in real time.



Create an Ultra-speed & Reliable Wi-Fi 6/7 Industrial Environment

PLANET IAP-3600BE and IAP-3600BE-4PF Industrial Wi-Fi 7 Access Points bring the latest ultra-speed wireless technology to industrial networks, delivering faster, more responsive, and energy-efficient connections. Together with the IAP-2400AX Wi-Fi 6 model, they provide seamless and secure connectivity across factories, warehouses, and remote sites. All models feature a compact IP30 metal housing, wide-temperature design (-40~70°C), and flexible DIN-rail or wall mounting, ensuring reliable operation even in the harshest environments.



Wireless AP Management Solution

PLANET Wireless AP Management Solution offers multiple ways of central AP management with Hardware AP Controller, Software AP Controller and Firmware AP Controller. The solution enables you to control up to 102,400 APs in different indoor or outdoor locations at the same time. Featuring the friendly floor plan, dashboard and graphical statistic functions through one single browser-based web user interface, the administrator can easily discover, configure, update and monitor all the managed APs.

Hardware AP Controller

UNC-NMS

Universal Network Management Central Controller with LCD

- Centrally manages up to 100 sites with up to 102,400 nodes spread all over
- Central provisioning and remotely controls over each managed device
- With encryption length of 2048 bits and SHA-265 algorithm for enhanced protection
- Physical site map viewing and logical topology view of network
- Alert popup message and e-mail alarm notification
- Top 10-site events, history comparison graph and critical event chart for analyzing network status



NMS-1000V-12

Universal Network Management Controller with LCD Touch Screen (12")

- Stylish TFT-LCD touch screen display and aluminum die-cast front bezel and chassis
- Auto discovery of up to 1024 devices via web interface
- Central provisioning and remotely control over each managed device
- A topology view of network devices by LLDP protocol
- All-new dashboard for monitoring traffic and PoE usage
- Setup Wizard, alert popup message and e-mail alarm notification
- Supports PLANET DDNS/Easy DDNS



NMS-500

Enterprise-class Universal Network Management Controller

- Auto discovery of up to 512 devices via web interface
- Central provisioning and remotely controls over each managed device
- A topology view of network devices by LLDP protocol
- SMTP alarm and syslog for managed devices in real-time status
- Smart AP Controller up to 512 APs
- Easy deployment with map positioning
- Dashboard and chart design for all information in one
- Console/Telnet command line interface
- Supports PLANET DDNS/Easy DDNS



XVR-800 series

Enterprise Dual 10G VPN Security Router

- One 10GBASE-T RJ45 and one 10GBASE-X SFP+ WAN/LAN ports
- Dual-WAN failover and load balancing
- Static Packet Inspection (SPI) firewall and blocks DoS/DDoS attack
- Full security with Cybersecurity, VLAN, NAT, DMZ, Static/Dynamic routing, and IP/MAC/Port filtering
- Multiple VPN with IPSEC, OpenVPN, PPTP, L2TP, GRE, WireGuard and VPN Failover
- PLANET UNI-NMS, Easy DDNS and Wireless AP Management
- Wi-Fi compliant IEEE 802.11b/g/n/ac/ax/be dual-band for mobile client connectivity (XVR-800BE/XVR-800PBE)
- Compliant with IEEE 802.3af/at PoE interface and PoE management (XVR-800P/XVR-800PBE)



Hardware AP Controller

VR-300 series

Enterprise 5-Port 10/100/1000T VPN Security Router

- Dual-WAN failover and load balancing
- Static Packet Inspection (SPI) firewall and blocks DoS/DDoS attack
- Full security with Cybersecurity, VLAN, NAT, DMZ, Static/Dynamic routing, and IP/MAC/Port filtering
- Multiple VPN with IPSEC, OpenVPN, PPTP, L2TP, GRE and VPN Failover
- PLANET UNI-NMS, Easy DDNS and Wireless AP Management
- Wi-Fi compliant IEEE 802.11b/g/n/ax dual-band for mobile client connectivity (VR-300W6/VR-300W6A)
- Compliant with IEEE 802.3af/at PoE interface and PoE management (VR-300P)
- One 1000BASE-X SFP slot for WAN (VR-300F/VR-300FP/VR-300FW-NR)



IVR-300 series

Industrial 5-Port 10/100/1000T VPN Security Gateway with Redundant Power

- Dual-WAN failover and load balancing
- Static Packet Inspection (SPI) firewall and blocks DoS/DDoS attack
- Full security with Cybersecurity, VLAN, NAT, DMZ, Static/Dynamic routing, and IP/MAC/Port filtering
- Multiple VPN with IPSEC, OpenVPN, PPTP, L2TP, GRE and VPN Failover
- PLANET UNI-NMS, Easy DDNS and Wireless AP Management
- Wi-Fi compliant IEEE 802.11b/g/n/ax dual-band for mobile client connectivity (IVR-300W)
- Compliant with IEEE 802.3af/at PoE interface and PoE management (IVR-300FP)
- -40 to 75 degrees C operating temperature and fanless design



ICG-2515-NR

Industrial 5G NR Cellular Gateway with 5-Port 10/100/1000T

- Global 5G NR(NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- 4 10/100/1000T LAN ports and 1 10/100/1000T WAN port
- 2 DI, 2 DO and 1 RS485 port for Modbus applications
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Full security with VLAN, NAT, DMZ, routing, firewall and IP/MAC/port filtering
- PLANET NMS controller system and PLANET CloudNMS supported
- DC 9 to 54V redundant power
- -40 to 75 degrees C operating temperature
- IP30 metal case with DIN-rail or wall-mount design



ICG-2515W-NR

Industrial 5G NR Cellular Wireless Gateway with 5-Port 10/100/1000T

- Global 5G NR(NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- Concurrent dual-band connectivity in 2.4GHz (600Mbps) and 5GHz (1200Mbps)
- 4 10/100/1000T LAN ports and 1 10/100/1000T WAN port
- 2 DI, 2 DO and 1 RS485 port for Modbus applications
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Full security with VLAN, NAT, DMZ, routing, firewall and IP/MAC/port filtering
- PLANET NMS controller system and PLANET CloudNMS supported
- DC 9 to 54V redundant power
- -40 to 75 degrees C operating temperature
- IP30 metal case with DIN-rail or wall-mount design



Smart AP Control

AP Management Just Got Easier, More User-friendly & More Usable



Topology

Dashboard

Floor Map



Touch Panel



Simplified Cluster Management with 4 Steps

Enterprise Wi-Fi Networking Solution

PLANET enterprise PoE access points deliver fast, reliable, and secure Wi-Fi with the latest Wi-Fi 7 (802.11be) and Wi-Fi 6/E (802.11ax) technologies. With features like MLO, 320 MHz channels, 4K-QAM, and future support for the 6 GHz band, they provide higher speeds, lower latency, and greater capacity for modern devices. Combined with multiple SSIDs, WPA/WPA2/WPA3 security, and easy management, these access points are ideal for homes, SOHOs, hotels, and offices—offering smooth browsing on 2.4 GHz and excellent HD streaming and multimedia performance on 5 GHz and future 6 GHz Wi-Fi 7 networks.

Enterprise Wireless Access Points/Industrial Wireless Access Points

WDAP-C5100BE

Dual Band 802.11be 5100Mbps Ceiling-mount Wireless Access Point

- Supports dual-band Wi-Fi 7 (802.11be) with speeds up to 4324Mbps on 5GHz and 688Mbps on 2.4GHz
- Features MU-MIMO and OFDMA for efficient multi-user communication
- Seamless Roaming technology ensures smooth transitions between access points
- Beamforming enhances signal strength and stability, while BSS Coloring reduces interference
- Offers WPA3 security and supports WPA/WPA2/WPA3 and WPA2 Enterprise for robust protection
- Supports 802.11s Mesh technology for extended Wi-Fi coverage and stability



WDAP-W3600BE

Wi-Fi 7 Dual Band 802.11be 3600Mbps In-wall Wireless Access Point

- Supports dual-band Wi-Fi 7 (802.11be) with speeds up to 2882Mbps on 5GHz and 688Mbps on 2.4GHz
- Features MU-MIMO and OFDMA for efficient multi-user communication
- Supports standard 86 x 86 mm European outlet box
- Beamforming enhances signal strength and stability, while BSS Coloring reduces interference
- Offers WPA3 security and supports WPA/WPA2/WPA3 and WPA2 Enterprise for robust protection
- Centrally managed by PLANET NMS controller and PLANET CloudNMS



IAP-3600BE/IAP-3600BE-4PF

Industrial Dual Band 802.11be 3600Mbps Wireless Access Point

- Supports dual-band Wi-Fi 7 (802.11be) with speeds up to 2882Mbps on 5GHz and 688Mbps on 2.4GHz
- Support 4-Port IEEE 802.3at PoE+ PSE (IAP-3600BE-4PF)
- Supports MU-MIMO, OFDMA and seamless roaming, beamforming and BSS coloring
- Multiple operation modes: AP, repeater, gateway and WISP mode options
- Supports Wi-Fi MESH
- Centrally managed by PLANET NMS controller and PLANET CloudNMS
- Effective fault alarm and DI/DO alert for better protection



IAP-1800AX/IAP-2400AX

Industrial 5GHz 802.11ax 2400Mbps Wireless Access Point

- Simultaneous dual-band connectivity at 2.4GHz 600Mbps and 5GHz 1200Mbps (IAP-1800AX), 4T4R connectivity at 5GHz 2400Mbps (IAP-2400AX)
- Supports MU-MIMO, OFDMA and seamless roaming, beamforming and BSS coloring
- Multiple operation modes: AP, repeater, gateway and WISP mode options
- Supports Wi-Fi MESH
- Centrally managed by PLANET NMS controller and PLANET CloudNMS
- Effective fault alarm and DI/DO alert for better protection



WDAP-C3000AX

Dual Band 802.11ax 3000Mbps Ceiling-mount Wireless Access Point w/802.3at PoE+ and 2 10/100/1000T LAN Ports

- Supports dual-band Wi-Fi 6 (802.11ax) with speeds up to 2400Mbps on 5GHz and 600Mbps on 2.4GHz
- Features MU-MIMO and OFDMA for efficient multi-user communication
- Seamless Roaming technology ensures smooth transitions between access points
- Beamforming enhances signal strength and stability, while BSS Coloring reduces interference
- Offers WPA3 security and supports WPA/WPA2/WPA3 and WPA2 Enterprise for robust protection
- Supports 802.11s Mesh technology for extended Wi-Fi coverage and stability



WDAP-W3000AX

Dual Band 802.11ax 3000Mbps In-wall Wireless Access Point

- Supports dual-band Wi-Fi 6 (802.11ax) with speeds up to 2400Mbps on 5GHz and 600Mbps on 2.4GHz
- Features MU-MIMO and OFDMA for efficient multi-user communication
- Supports standard 86 x 86 mm European outlet box
- Beamforming enhances signal strength and stability, while BSS Coloring reduces interference
- Offers WPA3 security and supports WPA/WPA2/WPA3 and WPA2 Enterprise for robust protection
- Supports 802.11s Mesh technology for extended Wi-Fi coverage and stability



Wireless Network Adapter

WTL-5800BE

802.11be Wi-Fi 7 Tri-band Wireless PCI Express Adapter

- Supports tri-band Wi-Fi 7 (802.11be) with speeds up to 5800Mbps on 6GHz, 2400Mbps on 5GHz and 574Mbps on 2.4GHz
- Features MU-MIMO and OFDMA for efficient multi-user communication
- PCIe x1 + USB interfaces, separating Wi-Fi and Bluetooth for flexible installation
- Bluetooth 5.4 for reliable connections to headsets, keyboards, mice, and other devices
- Offers WPA3 personal and enterprise including WPA2 transition mode for robust protection
- Two 5 dBi antennas + support for Windows 10/11 and Linux, built for demanding professional use



WTL-2400AXE

802.11AX Wi-Fi 6E Tri-band Wireless PCI Express Adapter

- Supports tri-band Wi-Fi 6E (802.11ax) with speeds up to 2400Mbps on 5G/6GHz and 574Mbps on 2.4GHz
- Features MU-MIMO and OFDMA for efficient multi-user communication
- PCIe x1 + USB interfaces, separating Wi-Fi and Bluetooth for flexible installation
- Bluetooth 5.2 for reliable connections to headsets, keyboards, mice, and other devices
- Offers WPA3 personal and enterprise including WPA2 transition mode for robust protection
- Two 5 dBi antennas + support for Windows 10/11 and Linux, ideal for office and SOHO environments



IoT Wireless Solutions

HLB-100

802.11ah HaLow Wi-Fi Bridge/Station

- Ultra-wide-distance transmission up to 1km with line of sight
- Industrial metal case IP30 design with -20 to 60 degrees C temperature range
- Easy to connect with multiple wired Modbus sensors through RS485 interfaces
- Compliant with the IEEE 802.11ah standard (Wi-Fi HaLow)



HLB-1150

802.11ah HaLow Wi-Fi Node Controller


- Ultra-wide-distance transmission up to 1km with line of sight
- Industrial metal case IP30 design with -40 to 75 degrees C temperature range
- Easy to connect with multiple wired Modbus sensors through RS485 interfaces
- 6 DI/ 2 DO interfaces for operating application
- Compliant with the IEEE 802.11ah standard (Wi-Fi HaLow)




Outdoor Wireless LAN Solutions

WISP Solution

Compared with the traditional ISP provider that offers wired Internet service, PLANET WISP solution provides more elastic, more effective and low-cost wireless Internet service, and no limitation of place, be it a small residence or campus.

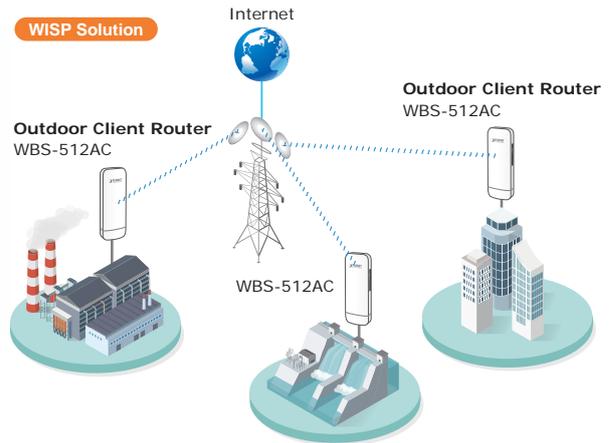

Wi-Fi Solution

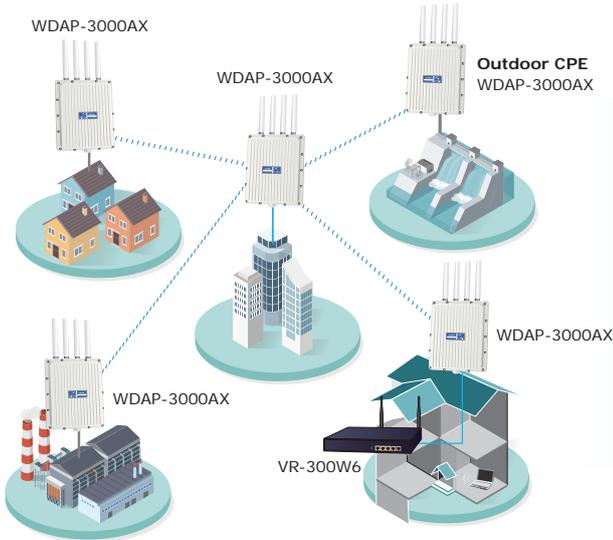


Outdoor Wi-Fi Mesh Solution

It provides small and medium businesses or SOHO with wireless Mesh data transmission solution. It features a wireless point to point/multiple point to multiple point bridge, general data transmission and media transmission like surveillance monitoring between buildings. It is suitable for wide-ranging connectivities.

Outdoor CPE/Client

PLANET Outdoor Wireless Solution supports multiple wireless communication connectivities (AP, Client CPE, WDS PtP, WDS PtMP, Repeater, Universal Repeater and WISP) suitable for various application requirements and thus it helps users to easily build a wireless network and extend the wireless range of the existing wireless network.

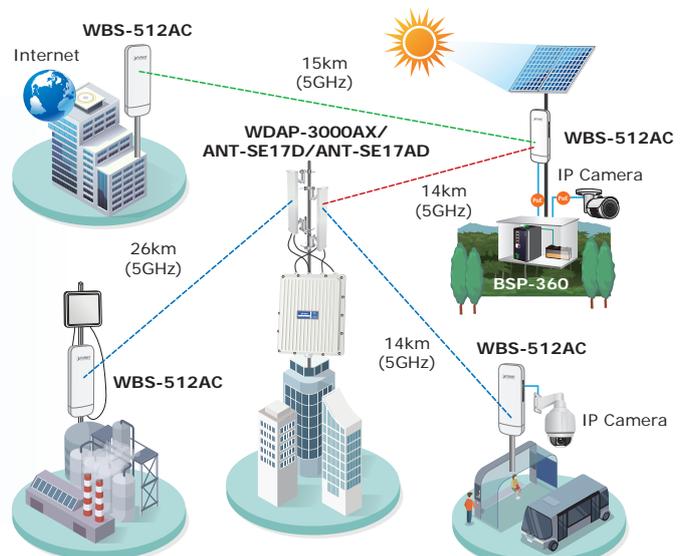

5GHz and 2.4GHz 802.11be/ax Wireless Outdoor Solutions

PLANET Outdoor Wireless Solution provides higher transmission power, longer distance, and better performance than standard outdoor wireless access points. It is equipped with various antennas and multiple adjustable transmission output power controllers which are quite suitable for longer distance and widely open space applications.

Wireless Outdoor CPEs

WDAP-5100BE

Dual Band 802.11be 5100Mbps Outdoor Wireless AP

- Supports dual-band Wi-Fi 7 (802.11be) with speeds up to 4324Mbps on 5GHz and 688Mbps on 2.4GHz
- Features MU-MIMO and OFDMA for efficient multi-user communication
- Seamless Roaming technology ensures smooth transitions between access points
- Beamforming enhances signal strength and stability, while BSS Coloring reduces interference
- Offers WPA3 security and supports WPA/WPA2/WPA3 and WPA2 Enterprise for robust protection
- Supports 802.11s Mesh technology for extended Wi-Fi coverage and stability



WDAP-3600BE

Wi-Fi 7 Dual Band 802.11be 3600Mbps Outdoor Wireless Access Point

- Simultaneous dual-band connectivity in 2.4GHz (688Mbps) and 5GHz (2882Mbps)
- 1 x 10/100/1000/2500BASE-T RJ-45, LAN/WAN port, support IEEE 802.3at PoE+ input
- 1 x 10/100/1000BASE-T RJ-45, LAN port
- Supports MU-MIMO, OFDMA and seamless roaming
- Supports IP65 rating
- Centrally managed by PLANET NMS controller and PLANET CloudNMS



WDAP-3000AX

Dual Band 802.11ax 3000Mbps Outdoor Wireless AP

- Supports Wi-Fi Mesh wireless network with Wizard
- Simultaneous dual-band connectivity in 2.4GHz (600Mbps) and 5GHz (2400Mbps)
- Supports MU-MIMO, OFDMA and seamless roaming
- 20KV surge protection for wired cable interface
- Supports IP67 rating, operating in temperature ranging from -40 to 70 degrees C
- Centrally managed by PLANET NMS controller and PLANET CloudNMS



WBS-512AC

5GHz 802.11ac 900Mbps Outdoor Wireless CPE

- 5GHz 11ac Wi-Fi speed up to 900Mbps Wave 2.0, MU-MIMO
- Built-in 14dBi directional antenna for PtP connection
- Multiple operation modes: AP, Gateway, Repeater, WDS, WISP
- Supports multiple VLANs mapping to multiple SSIDs
- "One-click PtP" to establish connection easily
- Centrally managed by PLANET AP Controller Series (NMS Series, WS Series, VR-300 & IVR-300 Series)



WBS-900AC

5GHz 802.11ac 900Mbps TDMA Outdoor Long Range Wireless CPE

- Equipped with advanced TDMA, ATPC, and MU-MIMO Wave 2 technologies
- Seamless design
- 25dBi dual-polarization antenna for PtP connection spanning up to 15km
- IP65-rated UV-resistant enclosure for harsh environment
- Built-in TVS lightning protection



5G NR Cellular Wireless Gateways

ICG-2515-NR/ICG-2515F-NR

Industrial 5G NR Cellular Gateway with 5-Port 10/100/1000T

- Global 5G NR(NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- 4 10/100/1000T LAN ports and 1 10/100/1000T WAN port
- 2 DI, 2 DO and 1 RS485 port for Modbus applications
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Full security with VLAN, NAT, DMZ, routing, firewall and IP/MAC/port filtering
- PLANET NMS controller system and PLANET CloudNMS supported
- DC 9 to 54V redundant power
- -40 to 75 degrees C operating temperature
- IP30 metal case with DIN-rail or wall-mount design
- 1 1000 BASE-X SFP Slot for WAN/LAN interface (ICG-2515F-NR)



ICG-2515W-NR/ICG-2515FW-NR

Industrial 5G NR Cellular Wireless Gateway with 5-Port 10/100/1000T

- Global 5G NR(NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- 4 10/100/1000T LAN ports and 1 10/100/1000T WAN port
- 2 DI, 2 DO and 1 RS485 port for Modbus applications
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Full security with VLAN, NAT, DMZ, routing, firewall and IP/MAC/port filtering
- PLANET NMS controller system and PLANET CloudNMS supported
- DC 9 to 54V redundant power
- -40 to 75 degrees C operating temperature
- IP30 metal case with DIN-rail or wall-mount design
- 1 1000 BASE-X SFP Slot for WAN/LAN interface (ICG-2515FW-NR)



ICG-2210W-NR

Industrial 5G NR Compact Cellular Wireless Gateway with 2-Port 10/100/1000T

- 5G NR (NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- 2 Micro SIM slots for cellular network connection
- 1 10/100/1000BASE-T LAN port and 1 10/100/1000BASE-T WAN/LAN port
- Supports 802.11b/a/g/n/ac for connectivity on mobile clients
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- 1 RS485 2-pin and 1 RS232 3-pin interface
- A compact, DIN-rail-mountable IP30 metal case.
- DC 9 to 36 V power input
- -40 to 75 degrees C operating temperature



VR-300FW-NR

5G NR Cellular + Wi-Fi 6 AX 1800 Dual Band + 1-Port 1000X SFP VPN Security Router

- Global 5G NR (NSA/SA)/4G LTE network with SIM design for cellular network redundancy
- Automatic failover between 5G NR and Gigabit WAN
- Complies with IEEE 802.11ax and IEEE 802.11a/b/g/n/ac standards
- Dual-WAN failover and dual-WAN load balancing
- 1 1000BASE-X SFP slot for WAN interface
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Stateful Packet Inspection (SPI) firewall and content filtering
- Blocks DoS/DDOS attack, port range forwarding
- High Availability, AP Controller, Captive Portal and RADIUS
- IPv6, SNMP, PLANET DDNS and Universal Network Management System
- Planet NMS controller system and PLANET CloudNMS supported



FWA-2100-NR

Industrial 5G NR Outdoor Unit (ODU) with 1-port Gigabit PoE PD

- 5G NR (NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- 2 Nano SIM slots for cellular network connection
- 1 10/100/1000BASE-T LAN port
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Blocks DoS/DDOS attack, port range forwarding
- High Availability, AP Controller, Captive Portal and RADIUS
- PLANET NMS controller system and PLANET CloudNMS supported
- DC 12V or 802.3at PoE+ input
- IP68 rating
- -20 to 60 degrees C operating temperature



VCG-2406WP-NR

Industrial/Vehicle 5G NR Cellular Wireless Gateway with M12 PoE+

- Global 5G NR(NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- Built-in Wi-Fi 6 (802.11ax) dual-band 2.4 GHz + 5 GHz wireless connectivity
- 3 x 10/100/1000BASE-T M12 X-coded LAN ports with 2-port IEEE 802.3at PoE+ injector function
- 1 x 10/100/1000BASE-T M12 X-coded WAN/LAN port, auto-negotiation, auto MDI/MDI-X
- One M12 A-coded 5-pin male connector with alarm, digital input and digital output functions
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Full security with VLAN, NAT, DMZ, routing, firewall and IP/MAC/port filtering
- PLANET NMS controller system and CloudNMS supported
- M12 K-coded 5-pin male connector with input voltage range of 9 to 54 VDC
- -40 to 75 degrees C operating temperature
- IP50 aluminum case with DIN-rail or wall-mount design



4G LTE Cellular Wireless Gateways

VCG-1500WG-LTE

Vehicle 4G LTE Cellular Wireless Gateway with 5-Port 10/100TX

- 4 10/100TX LAN ports and 1 10/100TX WAN port
- Industrial power with wide DC voltage power supply design
- One SIM slot and one 4G LTE antenna for network connection
- Supports Wi-Fi 802.11 b/g/n for connectivity on mobile clients
- GPS antenna allows to detect the location via sat nav system
- Supports GRE, PPTP, IPSec and L2TP
- Supports NAT, DMZ, MAC/Application/IP filter and static routing
- Supports DHCP server/client, PPPoE, static IP and DDNS
- -25 to 65 degrees C operating temperature
- Supports CMS and SNMP for remote management



ICG-2510W-LTE/ICG-2510WG-LTE

Industrial 4G LTE Cellular Wireless Gateway with 5-Port 10/100/1000T

- 5-port Gigabit Ethernet, build in redundancy protocol-VRRP
- 2 DI/DO and 1 serial port (RS232 or RS485) for Modbus applications
- Dual module SIM for network load balancing and redundancy
- WiFi compliance IEEE 802.11b/g/n/ac dual-band for mobile client connectivity
- GPS antenna allows to detect the location via sat nav system (ICG-2510WG-LTE)
- Multiple VPN with IPSEC, OpenVPN, PPTP, L2TP, GRE and VPN Failover
- Full security with VLAN, NAT,DMZ, Static routing, Firewall and IP/MAC/Port filtering
- Supports CMS for remote management
- -35 to 70 degrees C operating temperature and fanless design



Wireless Antennas and Cable Accessories

To commit the wireless long-distance connectivity, PLANET Wireless LAN Solution also provides a variety of Antennas, Cables and other Accessories for 2.4GHz and 5GHz band applications where more RF gain power is required to increase the convergence of the installations wirelessly.

The antennas include unidirectional antenna and omni-directional antenna to meet the need of different environments. The omni-directional antenna is ideal to install in a central base-station in a point to multi-point wireless application, and unidirectional antennas are designed for long distance.

To keep the wireless device free from lightning induced surges that travel on the coaxial transmission lines, PLANET also provides the arrester guarding the wireless equipment from damage that could cause your previous network resources to break down.

Flat Panel Antennas



ANT-FP14AD
14dBi Flat Panel Dual Polarization Antenna



ANT-FP18A
18dBi Flat Panel Antenna



ANT-FP14D
14dBi Flat Panel Dual Polarization Antenna



ANT-FP18
18dBi Flat Panel Directional Antenna

Omni-directional Antennas



ANT-OM8
8dBi Omni-directional Antenna



ANT-OM15
15dBi Omni-directional Antenna



ANT-OM5D-KIT
Dual Band Omni-directional Antenna 4/7dBi



ANT-OM10A
10dBi Omni-directional Antenna

Cables & Others



WL-LTNA
2.4/5GHz Lightning Arrester (N-male to N-female)



WL-NM-0.6
0.6m N-male (male pin) to N-male (male pin) Cable

Sector Antennas



ANT-SE17AD
2x2 MIMO 5GHz 17dBi Sector Antenna

IP Surveillance



AI Surveillance Station
AIS-1000

Redefining Security with **AI at the Edge**



Seamless Integration
with Existing Devices



Smart Local
Monitoring & Efficiency



Robust Data &
Privacy Protection



AI Event Hub



Feature Matching & Object Filtering



LLM-Powered Smart Search



Real-time Detection &
Behavior Analytics



Auto Report Generation

High Frame Rate (60fps) for Real-time Surveillance Applications

PLANET Exmor IP Camera Series with Zero-lux Illuminator is a high-resolution camera for the round-the-clock surveillance over IP networks. It supports H.264 and MJPEG compression formats and delivers excellent picture quality in Full HD resolutions at 60 frames per second (fps). Incorporating the new Exmor RST™ CMOS image sensor, it provides high-quality images under all lighting conditions.



Full Surveillance with 180° Panoramic Surround View

PLANET Fisheye IP Camera Series allows you to monitor all angles of a location using just one camera. Without installing any software, you can watch live view and utilize functions such as motion detection and camera tampering through the Web interface using a web browser. Distortion correction feature of the ICA-W8100 can fix the camera video so you can use e-PTZ to zoom in, zoom out, and pan across your camera's video to survey a large area easily.

Efficient Remote Monitoring of IP Cameras

PLANET IP Surveillance Solution provides multiple ways for users to remotely monitor all IP cameras more efficiently, such as user-friendly website management, apps for smart-phones and pads, and free DDNS services. It is quick to easily access your PLANET IP surveillance camera over both mobile phone and Wi-Fi network anytime, anywhere.



Cloud Services Make Access Easy Anywhere

To make home monitoring a truly simple experience, we have created Cloud App to enable you to access live video feeds of your home or office from any Internet-connected computer, iPhone®, iPad®, or Android® device anytime, anywhere. The Cloud Cameras can be viewed and managed on your personal account via Cloud App to enable you to enjoy the freedom of remote monitoring on your terms.

AI-Enhanced Surveillance The Future of Smart Security

PLANET newly developed AI Surveillance Station (AIS-1000) can provide AI monitoring to existing surveillance systems to further enhance monitoring and analytical data.

AI Surveillance Station Benefits

Intelligent Search

-  Human-based Playback Filtering, Region Detection, Feature Matching
-  Interactive Search Method (LLM)
-  Integrated Homepage for Enhanced Smart Search Experience
-  Automated Report Generation

Deep Search | Simple Point Accurate Identification

- ATTRIBUTE SEARCH**
 - 
 - 
 - 
- SIMILARITY SEARCH**
 - 
- FACE PROFILE SEARCH**
 - 
- PATH SEARCH**
 - 
 - 
- PLATE SEARCH**
 - 

AI Engine Functions

Vehicle Info Detection



- Loitering Detection** 
- People Counting** 
- Zone Intrusion** 
- Dwell Time Analysis** 

Pet Detection



Line-Crossing



Workplace Safety Detection



Interactive Search Method (LLM) Utilizing Natural Language

- White SUV vehicle parked  
- A person wearing a red shirt, riding on a bicycle  

AIS-1000

- High-performance edge AI analytics with built-in NPU acceleration
- All-in-one AI video analytics for security, safety, and compliance
- Intelligent AI smart search for fast event investigation
- NVR-style live monitoring and event playback via web interface
- Flexible support for RTSP IP, USB, and analog cameras
- Real-time alerts with configurable event and notification rules
- Enterprise-grade system with AI model management and monitoring





Up to 83% gap



H.265+ Surveillance

PLANET H.265+ Series of IP Cameras can perform in various surveillance applications. With high-resolution design, it can capture clear images and is perfect for identifying objects and persons. Moreover, it supports 802.3af PoE interface, and facilitates the indoor surveillance applications without worrying the electric source. Besides, NVR and Web UI management make it easy to do the configuration and live viewing. With so many features offered, PLANET H.265+ Series of IP Cameras no doubt is your best choice for indoor surveillance solution.

ICA-M3580P

- 1/2.8" 5 megapixel SONY STARVIS back-illuminated CMOS sensor with progressive scan
- Simultaneous H.264(+)/H.265(+)/JPEG multi-stream video encoding
- Supports Full Color (White LED) and Smart IR (IR LED) in one
- IP67-rated metal housing with cable management bracket for rigorous environment
- Supports IPv6, QoS, IEEE 802.1X network functions and TLS for secure email security and encryption
- NDAA compliant



Dual Light

ICA-M4580P

- 1/2.8" 5 megapixel SONY STARVIS back-illuminated CMOS sensor with progressive scan
- Simultaneous H.264(+)/H.265(+)/JPEG multi-stream video encoding
- Supports Full Color (White LED) and Smart IR (IR LED) in one
- IP67-rated metal housing with cable management bracket for rigorous environment
- Supports IPv6, QoS, IEEE 802.1X network functions and TLS for secure email security and encryption
- NDAA compliant



Dual Light

ICA-3880

- 1/2.8" 8 megapixel SONY Starvis Back-illuminated CMOS sensor and built-in MIC
- H.264(+)/H.265(+)/JPEG multi-stream video encoding
- Supports Full Color (White LED) and Smart IR (IR LED) in one
- Supports digital WDR (DWDR) and 3-dimensional noise reduction (3DNR)
- Supports IPv6, QoS, IEEE 802.1X network functions and TLS for secure email security and encryption
- NDAA compliant



Dual Light

ICA-4880

- 1/2.8" 8 megapixel SONY Starvis Back-illuminated CMOS sensor and built-in MIC
- H.264(+)/H.265(+)/JPEG multi-stream video encoding
- Supports Full Color (White LED) and Smart IR (IR LED) in one
- Supports digital WDR (DWDR) and 3-dimensional noise reduction (3DNR)
- Supports IPv6, QoS, IEEE 802.1X network functions and TLS for secure email security and encryption
- NDAA compliant



Dual Light



H.264 IP Cameras

PLANET H.264 Series of IP Cameras supports M-JPEG compression formats to deliver excellent picture quality in various surveillance applications. It can provide the identification of objects and people, perfect for surveillance needs from all aspects for most outdoor and indoor environments such as railway stations, warehouses, airports, construction sites, homes, boutiques, department stores, restaurants and more.

ICA-HM620

- Sony Exmor progressive CMOS sensor
- 4.7~94mm vari-focal, auto-iris lens
- 20X optical, 8X digital zoom
- Maximum resolution 1920 x 1080 (30fps)/1280 x 720 (60fps)
- WDR, 3DNR, IP66, PoE+



Exmor
CMOS Sensor



Fisheye IP Camera

ICA-W8100

- 0.89mm fisheye lens
- Maximum resolution 1280 x 720 (30fps)
- IEEE 802.11n wireless LAN compliant
- WPS, PIR for thermal, motion detection



Pan & Tilt IP Camera

ICA-W7100

- 3.6mm board lens
- Maximum resolution 1280 x 720 (30fps)
- 10-meter IR LEDs with ICR
- WDR, 2DNR
- Pan and tilt (Pan: 0°~355°; Tilt: 0°~90°)
- IEEE 802.11n wireless LAN compliant



AHD Cameras

CAM-AHD425

Product Image

4-in-1

Sony Sensor



Resolution	AHD 1080p
Sensitivity	0 lux with built-in IR LED
Sensor	1/2.8" Sony CMOS sensor
Lens	3.6mm/F1.2
IR Distance	20 meters
WDR	D-WDR
Day and Night	IRC switch
Digital Noise Reduction	2DNR/3DNR
Protection Class	IP65

Network Video Recorders

To save the total cost of ownership (TCO), PLANET provides the alternative way to store all the videos and audios from the IP camera and the NVR. The NVR product family includes 8-ch, 16-ch and 64-ch capability that can record IP cameras that are connected on the IP network whether they are wired or wireless and indoors or outdoors.

- Simultaneous recording and live video streams
- Supports MJPEG, MPEG-4 H.264 and H.265 compressions
- Mobile devices remote monitoring
- Auto configuration for PLANET IP camera
- Easy access with PLANET Dynamic DNS
- Manual or schedule recording of 8/25/64 IP cameras simultaneously
- ONVIF compliant
- Video recycling function keeps the video recording 24/7
- Web-based and management utility for easy configuration
- 2-way audio function
- E-Map interface in web and utility configuration
- Exports recorded video file to AVI format
- Multiple Languages support

H.265+ Network Video Recorders

NVR-1600

- Supports H.264/H.265/H.264+/H.265+ compression with up to 4K (3840 x 2160) video resolution
- Scheduled recording of 16 IP cameras simultaneously
- Supports operation simultaneously for Preview, Recording, Playback, Live and Backup
- Multiple event detections like motion detection, video loss and PLANET AI IP camera event management
- Smart event detection like Line Crossing, Regional Intrusion, Loitering, and People Gathering
- Mobile phone app/PLANET PVMS software for easy configuration and expandable multi-sites management of up to 256-ch IP cameras simultaneously



H.264 Network Video Recorders

NVR-E6480

- Manages up to 64 cameras
- 8-bay rackmount (2U) with software RAID (0,1)
- Instant playback in live view window
- Location management with eMap
- Supports dual stream management
- Remote access via mobile app, Web browser or CMS



NVR-820

- Records 240fps @1920 x 1080
- Maximum bitrate 55Mbps
- 2 x SATA HDD
- HDMI and VGA dual local display
- Intelligent, Google e-Map, and multi-brand IP CAM support



IP Telephony



Integrated HD VoIP Solution for Businesses and Homes

- Easy integration with IETF SIP Protocol
- Asterisk-based IP PBX
- User-friendly Color IP Phone
- IP-based Video Intercom



SIP IP Intercoms



Indoor Touch Screen PoE Video Intercom



SIP HD Color PoE IP Phone

HD Voice

PLANET VoIP Series features wide-band, high-definition voice for crisp, precise sound quality whether delivered via the handset, speakerphone or optional headset. All phones in the series feature wideband-compliant, and hearing aid compatible handsets along with built-in, high-quality speakers and microphones.



Conferencing Solutions

The convenient 3-way conferencing feature, available on all PLANET VoIP Series, will help you save time and resources. A paging function lets you quickly get two colleagues on the phone with you for a conference even if they're located at the opposite ends of the country.

Watching Live Surveillance Images via SIP IP Cameras

PLANET SIP communication solution integrated with IP PBX, IP phone and IP camera helps users to watch live surveillance view more easily just by dialing a phone number. With the motion alarm function, the SIP IP camera provides a more instant, efficient response method, better than the other methods, such as FTP, email, SD card and more, to alert users so as to prevent a bad event from happening.



IP PBX

Green IP Office

The Fax to Email/Email to Fax service by PLANET IP PBX allows users to transfer/receive faxes directly to/from your email inbox as file attachments. It's an easy and confidential way of receiving, storing and forwarding important fax documents, thus creating a paperless green office.



Managing your Office from your Mobile Device

Users have an IP PBX phone number including an office extension number where calls ring simultaneously on their mobile device, making it easy to connect one another wherever they are. Access to people, messages and information help mobile users deliver whether they are in or out of the office.

SIP IP Conference Phones

PLANET Professional VIP Telephone series is both aesthetically appealing and highly practical, meeting whatever business requirements you need for your daily work. Advanced business telephony features, including wideband HD audio for crystal-clear conversation, HD displays and support for security standards such as TLS and SRTP, are indispensable when it comes to quality and functionality. These high-performance devices are future proofed and provide the best in wideband HD audio, ensuring crystal-clear sound quality in the on-premise or hosted PBX environment.

- IETE SIP (RFC 3261), STUN (RFC 3489)
- Power over Ethernet IEEE 802.3af/at
- Auto provisioning, TR069, VPN, VLAN, QoS
- Advanced security protection with SRTP/TLS/HTTPS
- Interoperable with all major IP PBX platforms
- Acoustic echo cancellation (AEC), adaptive jitter buffer (AJB)
- Background noise estimation (BNE)
- Comfort noise generation (CNG), noise reduction (NR)
- Packet loss concealment (PLC), voice activity detection (VAD)
- Audio codecs: G.711 A-law, μ -law, G.722 (wideband), G.723, G.726 and G.729AB

VIP-1260PT

- IETE SIP compliant with Transport Layer Security
- Wideband G.722 HD and Opus audio
- 2.8-inch color LCD with Multi-language display
- Dual Gigabit and IEEE 802.3af/at PoE compliant



VIP-1140PT

- IETE SIP compliant with Transport Layer Security
- 4 SIP Lines
- 6-way Audio Conference
- Wideband G.722 HD and Opus audio
- 2.4-inch color LCD with Multi-language display



ICF-2000

- 7-inch color touch screen with Android 9.0 OS.
- Built-in 5MP camera with 1080p @ 30fps H.264 video call support.
- Up to 20 SIP lines with 112 one-touch DSS keys.
- Dual Gigabit and IEEE 802.3af/at PoE compliant.
- Built-in 2.4GHz/5GHz dual-band Wi-Fi.
- Supports up to 3-party video/audio mixed conferencing and 10-party audio conferencing.
- Wideband G.722 HD and Opus audio codec with handset and hands-free function.



VTS-700WP

- Stylish 7-inch 1024 x 600 resolution IP Intercom touch screen display
- Powered by PoE or external source
- 8-zone alarm interface available for security control
- Short Circuit Output x 1/Short Circuit Input x 1/RS-485 x1
- Built-in Wi-Fi 2.4G/5G
- Standard SIP protocol compatible with modern IP Intercom systems
- Integrates control gateway and door phone with one control pad
- Real-time image (1080P) monitoring of home and community public cameras



PLANET IP Phone Enables Seamless Communication from Meetings to Front Desk

- 20 SIP Conference Phone
- HD Audio
- Dual-band Wi-Fi
- Power over Ethernet
- Video Conferencing
- Desk or Wall Mounting

Built-in 5 Mega-pixel Camera

112 DSS Keys

7-inch Color Touch Screen

SIP Intercom & Door Phones

PLANET SIP Door Phone series is the ideal solution for communication in general-purpose outdoor and indoor environments. Its sleek and fast-to-install features are combined with advanced technology. It provides visitor communication monitoring and access control. One glance at the display panel will let you know who is standing outside your door. Then, you start a dialogue or open the door lock. In addition, with PLANET IP PBX or Z-Wave Plus Gateway, you can obtain a comprehensive system for door communication or easy integration into an existing home automation system.

- IETE SIP (RFC 3261), STUN (RFC 3489)
- Power over Ethernet IEEE 802.3af/at
- ONVIF compliant for interoperability
- Auto provisioning, TR069, VPN, VLAN, QoS
- Advanced security protection with SRTP/TLS/HTTPS
- Interoperable with all major IP PBX platforms
- AEC, AJB, BNE, CNG, NR, PLC, VAD
- Audio codecs: G.711 A-law, μ -law, G.722 (wideband), G.723, G.726 and G.729AB

HDP-1261PT

- With high protection level of IP66 and IK07, wide temperature range from -40° to 70°
- Support to open the door with RFID/IC cards, NFC, indoor switch, remote DTMF, Timed open door
- Built in 2M pixels wide-angle camera: 120°(H), 60°(V) with infrared night-vision feature
- Compatible with SIP and ONVIF protocols
- Built-in maximum 128GB capacity TF card slot for image storage
- HD voice speech quality with built-in 2.5W speaker and Acoustic Echo Canceller



HDP-5261PT

- 1080P Full HD video at 30fps
- Viewing angle: 120° (H), 60° (V) (141° diagonal)
- IP66 waterproof/dust-proof rating and IK07 vandal-resistance
- Operating temperature range: -40°C to +70°C
- Supports PoE via IEEE 802.3at
- Two-way HD audio with wideband G.722 and Opus codec support
- RFID/IC card reader (EM4100, MIFARE ONE) + built-in keypad + remote unlock options



HDP-5260PT

- 720p HD camera with 3 IR LEDs
- Wideband G.722 HD audio
- Anti-vandal solution
- IP65 and IK10 for rigorous environment
- -40 to 70 degrees C operating temperature
- Unlock the door with an RFID, remote DTMF or local password



IP PBXs

Small and medium businesses require specialized features to support their workflows. PLANET IP PBX is designed specifically for small and medium businesses. It combines an IP PBX with robust telephony features that traditional phone systems can't deliver. PLANET IP PBX is affordable, reliable, full-featured, and easy to deploy, administer, and maintain. It helps small and medium businesses dramatically reduce communications and network management costs, enhance collaboration, improve productivity, and more.

- IETE SIP (RFC 3261), STUN (RFC 3489)
- Automatic recording/One touch recording
- Multi-language, CDR and multi-layer IVR
- Intercom, paging and video call
- Call forward, follow me and DND
- Ring/pick-up groups, and smart DID
- Virtual fax, voicemail to email and fax to email
- Auto provisioning, TR069, VPN, VLAN
- Advanced security protection with SRTP/TLS/HTTPS
- Audio codecs: G.711 A-law, μ -law, G.722 (wideband), G.726, G.729, GSM, Speex, Opus

IPX-1100

- 50 concurrent calls and up to 100 registers
- 30 conference room calls
- Recording/Voicemail up to 400 hours



IPX-1102

- 50 concurrent calls and up to 100 registers
- 30 conference room calls
- Recording/Voicemail up to 400 hours
- Built-in 2 FXO interfaces



IPX-2200

- 80 concurrent calls and up to 200 registers
- 60 conference room calls
- Recording/Voicemail up to 15,000 hours
- 2 slots for maximum 8 ports for FXO/GSM
- 10/100/1000 Gigabit Ethernet



IP PBXs

IPX-21SL/IPX-21FO

- 4 standard two-wire, RJ11 interfaces
- Up to 4 ports for 4 POTS lines (IPX-21FO)
- Up to 4 ports for 2 POTS lines and 2 FXS connect to analog phone set (IPX-21SL)
- Loop start signaling for advanced features: caller ID and distinctive ring



For IPX-2500 / IPX-2200 / IPX-2100

IPX-21GS

- Quad-band EGSM 850/900/1800/1900 MHz for worldwide GSM compatibility and deployments
- Up to 4 ports for 4 GSM lines
- GSM protocol stack for voice and SMS
- Loop start signaling for advanced features: caller ID and distinctive ring



For IPX-2500 / IPX-2200 / IPX-2100

SIP VoIP Gateway

PLANET VGW series is easy to use for all types of businesses. The VoIP Gateway offers quality voice communications and real-time fax data over IP networks and it does not need human resources to deploy a VoIP network. With the optimized SIP architecture, VoIP Gateway provides added flexibility during migration to Unified Communications by supporting the traditional analog devices.

PLANET VoIP Gateway is the ideal choice for P2P/SIP proxy (IP PBX) voice chat, and ITSP cost-saving solution.

VGW-420FS

- 4-line FXS connects to analog phone set or PABX



VGW-820FS

- 8-line FXS connects to analog phone set or PABX



VGW-1620FS

- 16-line FXS connects to analog phone set or PABX



VGW-2420FS

- 24-line FXS connects to analog phone set or PABX



VGW-3220FS

- 32-line FXS connects to analog phone set or PABX



VGW-420FO

- 4-line FXO connects to analog phone line or IP PBX



Wireless SIP Router/DECT Phone

VIP-462DG

- Complies with IETE SIP (RFC 3261), and ETSI DECT
- Complies with IEEE 802.11b/g standards
- 2 identities/accounts with 1 FXS and 1 DECT handset
- PSTN lifeline for emergency calls
- SPI firewall and DoS protection
- QoS, VAD, CNG and dynamic jitter buffer
- Audio codecs: G.711 A-law, μ -law, G.723.1 and G.729



Network Security



Enterprise Dual 10G VPN Security Router
XVR-800 series

Industrial Vehicle 5G NR Cellular Wireless Gateway
VCG-2406WP-NR

Building a Safe and Secure Network Powerful Enterprise VPN Security Solution



Cyber Security



Content Filtering



SPI Firewall




VPN Encryption



IDS & IPS

Excellent Ability in Threat Defense

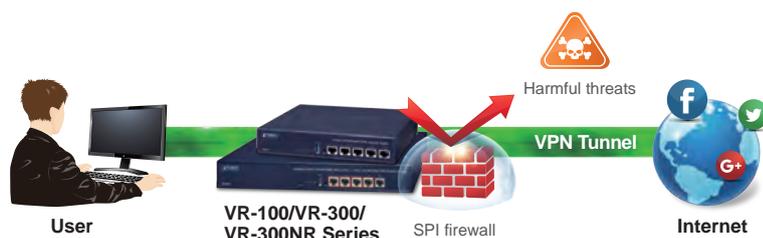

Load Balancing

Balance network traffic across the WAN ports.



Dual WAN ports

2 WAN ports for failover, offering non-stop network connectivity.

VPN Security Routers / Industrial VPN Security Gateway Series

PLANET has launched Wireless VPN Security Router Series and Industrial 5G NR Cellular Gateway that includes the cutting-edge 5G technology, Wi-Fi 7/6, and an array of security features, such as cybersecurity, SPI firewall, and policy auditing encompassing content filtering, VPN tunnel, and MAC/IP filtering. This integration aims to empower users in deploying networks with improved transmission performance and heightened security measures.

PLANET XVR/IXVR-800 series, VR/IVR-300 series, ICG-2515F series, and VCG Vehicle Cellular Gateway Series (e-Mark ready) offer versatile WAN connectivity options, providing copper and fiber, 10GBASE-T, and 10GBASE-X SFP+ interface. Equipped with an SFP slot, these devices extend connectivity distances from 550 meters to 2 kilometers (for multi-mode fiber) and 10 to 120 kilometers (single-mode fiber or WDM fiber). Additionally, they support the SFP-DDM (digital diagnostic monitor) function, enabling easy real-time monitoring of critical parameters such as optical output power, optical input power, temperature, laser bias current, and transceiver supply voltage.

IXVR-800 Series

- 1 x 10G SFP+ slot, 1 x 10G RJ45 port, and 4 x Gigabit RJ45 ports
- IEEE 802.11be (Wi-Fi 7), concurrent dual-band 2.4 GHz (688 Mbps) + 5 GHz (4324 Mbps)
- Dual-WAN failover and load balancing
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Stateful Packet Inspection (SPI) firewall and content filtering
- Blocks DoS/DDOS attack, port range forwarding
- High Availability, AP Controller, Captive Portal and RADIUS
- Compliant with the IEEE 802.3at PoE+ with PD alive check and schedule management
- PLANET Universal Network Management System and PLANET CloudNMS supported



XVR-800 Series

- 1 x 10G SFP+ slot, 1 x 10G RJ45 port, and 4 x Gigabit RJ45 ports
- IEEE 802.11be (Wi-Fi 7), concurrent dual-band 2.4 GHz (688 Mbps) + 5 GHz (4324 Mbps)
- Global 5G NR(NSA/SA)/4G LTE network with nano-SIM design for cellular network redundancy
- Dual-WAN failover and load balancing
- Static Packet Inspection (SPI) firewall and blocks DoS/DDoS attack
- Full security with cybersecurity, VLAN, NAT, DMZ, static/dynamic routing, and IP/MAC/port filtering
- Multiple VPN with IPSEC, OpenVPN, PPTP, L2TP, GRE and VPN failover
- IPv6, PLANET UNI-NMS, easy DDNS
- PLANET Universal Network Management System and PLANET CloudNMS supported



VR-300 Series

- Dual-WAN failover and load balancing
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Stateful Packet Inspection (SPI) firewall and content filtering
- Blocks DoS/DDOS attack, port range forwarding
- High Availability, AP Controller, Captive Portal and RADIUS
- Compliant with the IEEE 802.3at PoE+ with PD alive check and schedule management
- PLANET Universal Network Management System and CloudViewer app supported



VR-100

- Dual-WAN failover and load balancing
- Static Packet Inspection (SPI) firewall and blocks DoS/DDoS attack
- Full security with cybersecurity, VLAN, NAT, DMZ, static/dynamic routing, and IP/MAC/port filtering
- Multiple VPN with IPSEC, OpenVPN, PPTP, L2TP, GRE and VPN failover
- IPv6, PLANET UNI-NMS, easy DDNS
- PLANET Universal Network Management System and CloudViewer app supported



IVR-300/IVR-300W/IVR-300FP

- Dual-WAN failover and dual-WAN load balancing
- SSL VPN and robust hybrid VPN (IPSec/SSL/L2TP over IPSec)
- Stateful Packet Inspection (SPI) firewall and content filtering
- Blocking DoS/DDOS attack, port range forwarding,
- PLANET DDNS, IPv6, SNMP, Wireless AP management
- Compliant with IEEE 802.11a/b/g/n/ax wireless technology
- IP30 metal case, DIN-rail and wall-mount designs
- -40 to 75 degrees C operating temperature
- 9-54V DC, redundant power with reverse polarity protection function
- PLANET Universal Network Management System



IVR-100

- Dual-WAN failover and load balancing
- Static Packet Inspection (SPI) firewall and blocks DoS/DDoS attack
- Full security with cybersecurity, VLAN, NAT, DMZ, static/dynamic routing, and IP/MAC/port filtering
- Multiple VPN with IPSEC, OpenVPN, PPTP, L2TP, GRE and VPN failover
- IPv6, PLANET UNI-NMS, easy DDNS
- -40 to 75 degrees C operating temperature and fanless design



VPN Security Routers / Industrial VPN Security Gateway Series

VR-300FW-NR

- Global 5G NR(NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- Concurrent dual-band connectivity in 2.4GHz (600Mbps) and 5GHz (1200Mbps)
- One 1000BASE-X SFP slot for WAN interface
- Copper/fiber Dual-WAN failover and Dual-WAN load balancing
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Stateful Packet Inspection (SPI) firewall and content filtering
- High Availability, AP Controller, Captive Portal and RADIUS
- PLANET Universal Network Management System and CloudViewer app supported



VR-300F/ VR-300FP

- One 1000BASE-X SFP slot for WAN interface
- Copper/fiber Dual-WAN failover and Dual-WAN load balancing
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Stateful Packet Inspection (SPI) firewall and content filtering
- High Availability, AP Controller, Captive Portal and RADIUS
- PLANET Universal Network Management System and CloudViewer app supported



Industrial 5G NR/4G LTE Security Gateways

ICG-2515-NR/ICG-2515F-NR

- Global 5G NR(NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- 4 10/100/1000T LAN ports and 1 10/100/1000T WAN port
- 2 DI, 2 DO and 1 RS485 port for Modbus applications
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Full security with VLAN, NAT, DMZ, routing, firewall and IP/MAC/port filtering
- PLANET NMS controller system and CloudViewer app supported
- DC 9 to 54V redundant power
- -40 to 75 degrees C operating temperature
- IP30 metal case with DIN-rail or wall-mount design
- 1 1000 BASE-X SFP WAN/LAN port for long distance extension (ICG-2515F-NR)



ICG-2515W-NR/ICG-2515FW-NR

- Global 5G NR(NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- Concurrent dual-band connectivity in 2.4GHz (600Mbps) and 5GHz (1200Mbps)
- 4 10/100/1000T LAN ports and 1 10/100/1000T WAN port
- 2 DI, 2 DO and 1 RS485 port for Modbus applications
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Full security with VLAN, NAT, DMZ, routing, firewall and IP/MAC/port filtering
- PLANET NMS controller system and CloudViewer app supported
- DC 9 to 54V redundant power
- -40 to 75 degrees C operating temperature
- 1 1000 BASE-X SFP WAN/LAN port for long distance extension (ICG-2515FW-NR)



ICG-2210W-NR

- 5G NR (NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- 2 Micro SIM slots for cellular network connection
- 1 10/100/1000BASE-T LAN port and 1 10/100/1000BASE-T WAN/LAN ports
- Supports 802.11b/a/g/n/ac for connectivity on mobile clients
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- 1 RS485 2-pin and 1 RS232 3-pin interface
- A compact, DIN-rail-mountable IP30 metal case
- DC 9 to 36 V power input
- -40 to 75 degrees C operating temperature



ICG-2510WG-LTE

- 5-port Gigabit Ethernet, built-in redundant VRRP protocol
- 2 DI/DO and 1 serial port (RS232 or RS485) for Modbus applications
- Dual module SIMs for network load balancing and redundancy
- WiFi compliance IEEE 802.11b/g/n/ac dual-band for mobile client connectivity
- GPS antenna allows to detect the location via sat nav system
- Multiple VPN with IPSEC, OpenVPN, PPTP, L2TP, GRE and VPN failover
- Full security with VLAN, NAT,DMZ, static routing, firewall and IP/MAC/port filtering
- Supports CMS for remote management
- -35 to 70 degrees C operating temperature and fanless design



Industrial 5G NR/4G LTE Security Gateways


FWA-2100-NR

- 5G NR (NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- 2 Nano SIM slots for cellular network connection
- 1 10/100/1000BASE-T LAN port
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Blocks DoS/DDOS attack, port range forwarding
- High Availability, AP Controller, Captive Portal and RADIUS
- DC 12V or 802.3at PoE+ input
- IP68 rating
- -20 to 60 degrees C operating temperature
- PLANET NMS controller system and CloudViewerPro app supported




VCG-2406WP-NR

- Global 5G NR(NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- Concurrent dual-band connectivity in 2.4GHz (600Mbps) and 5GHz (1200Mbps)
- 3 x M12 X-coded Gigabit LAN Ports (2 with IEEE 802.3at PoE+), 1 x M12 X-coded Gigabit WAN/LAN Ports
- M12 A-coded 5-pin for alarm/digital I/O, M12 K-coded 5-pin for 9-54 V DC power input
- SSL VPN and robust hybrid VPN (IPSec/SSL/L2TP over IPSec)
- Stateful Packet Inspection (SPI) firewall and content filtering
- Blocking DoS/DDOS attack, port range forwarding
- PLANET DDNS, IPv6, SNMP, Wireless AP management
- -40 to 75 degrees C operating temperature
- 9-54V DC, redundant power with reverse polarity protection function
- PLANET Universal Network Management System
- IP50 aluminum case with wall-mount design

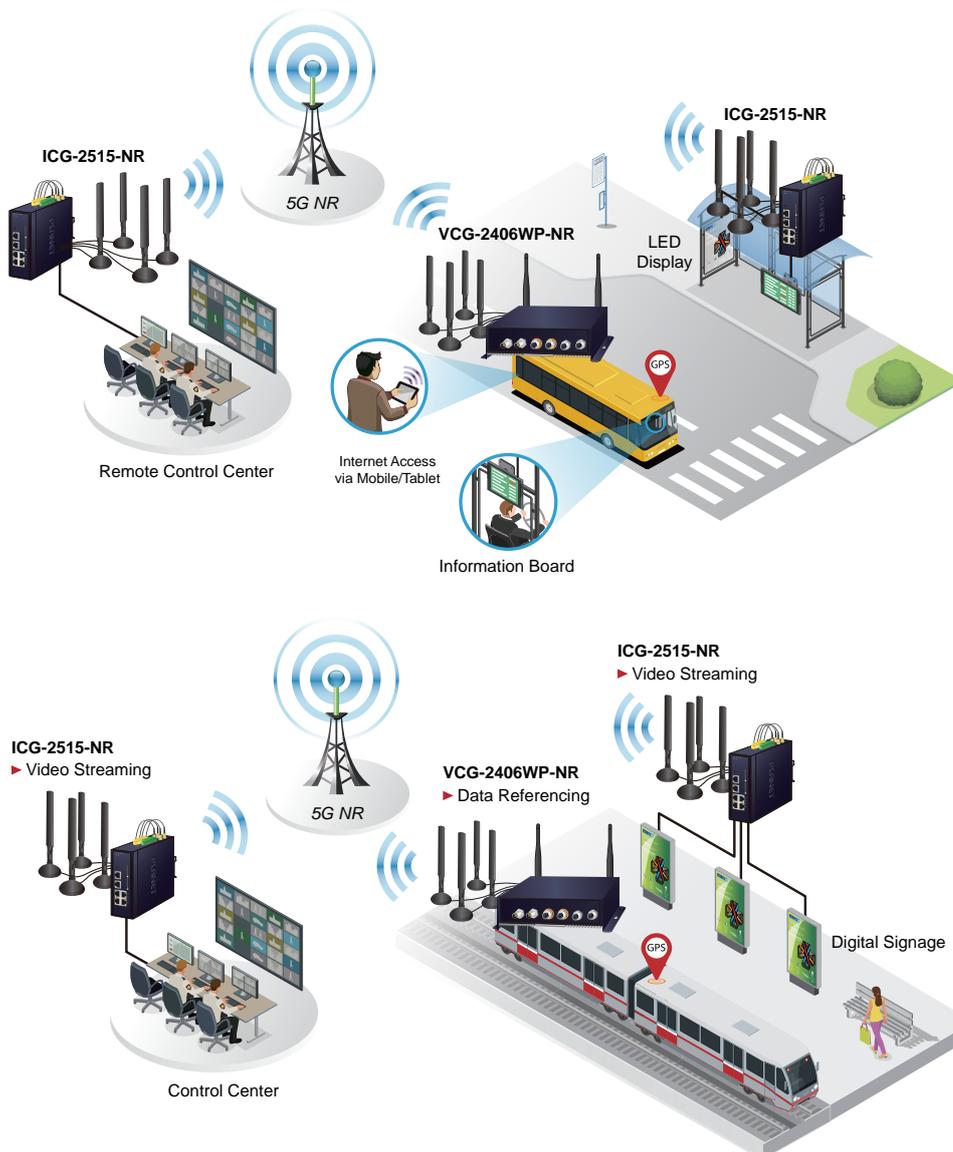

Network Peripherals

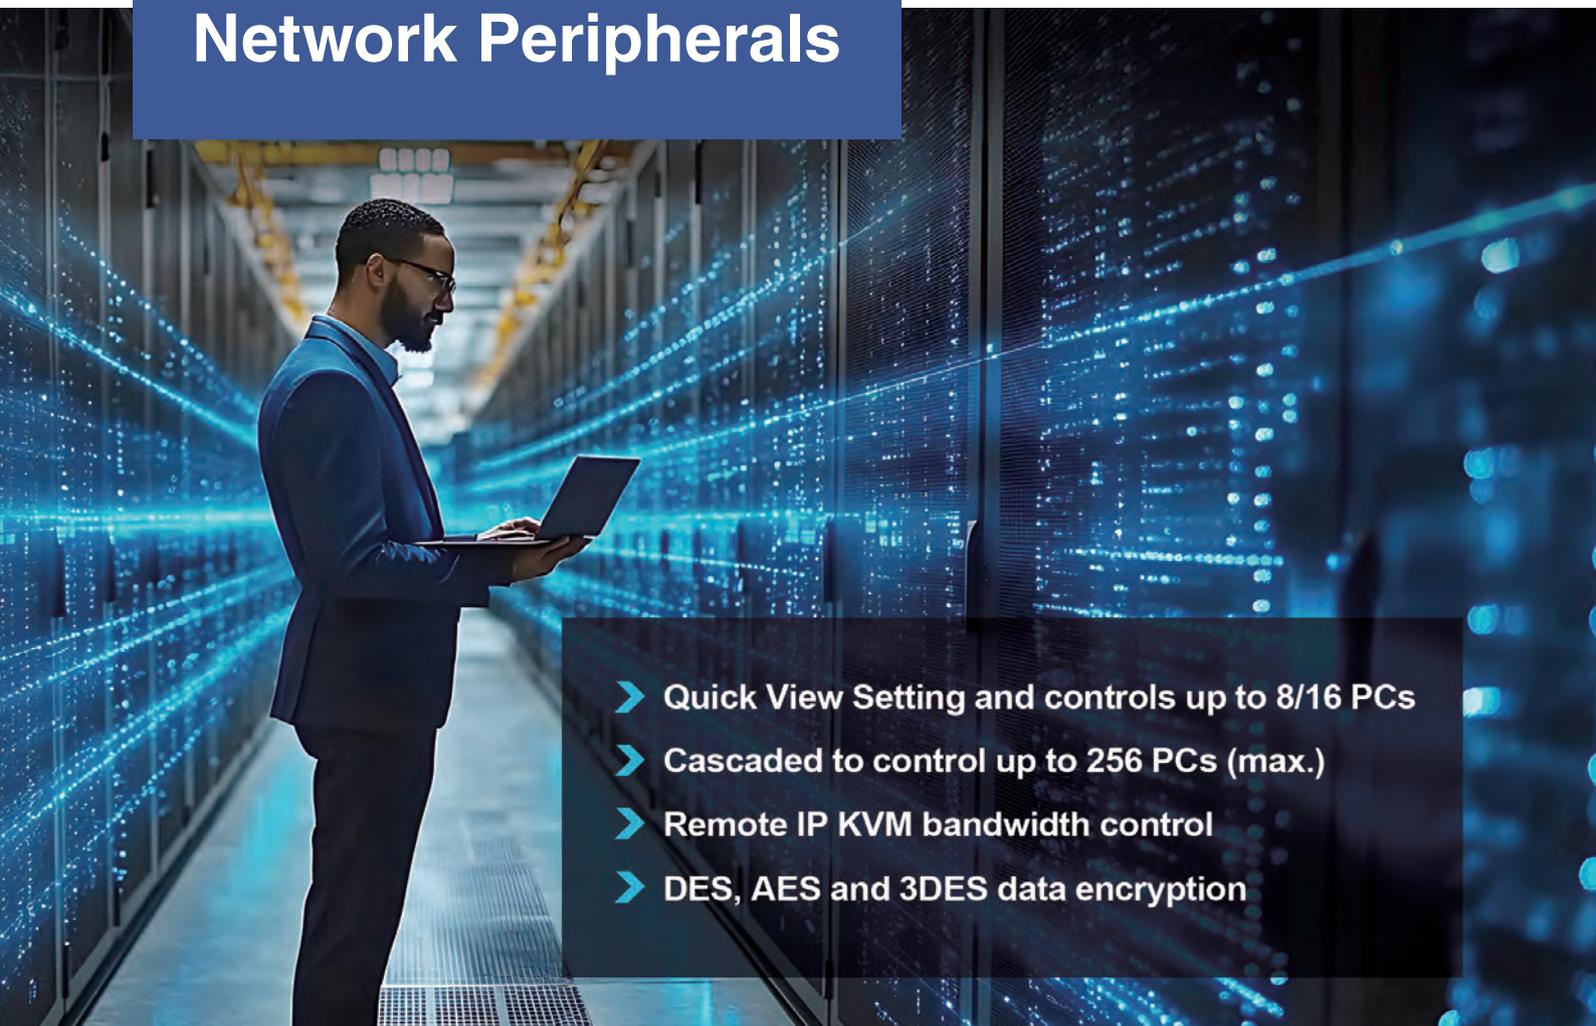

- Quick View Setting and controls up to 8/16 PCs
- Cascaded to control up to 256 PCs (max.)
- Remote IP KVM bandwidth control
- DES, AES and 3DES data encryption

All-in-One IP KVM Switch Solution for Enterprises Remotely Access Your Servers from Anywhere

8/16-Port Combo/IP KVM Switch



17" 8/16-Port Combo/ IP VGA LCD KVM Switch



* Windows, MacOS, and Linux systems are supported

IP KVM

PLANET enterprise IP KVM Switches feature the patented design of the availability of USB and PS/2 interface connection, user-friendly OSD utility and daisy-chain function. In the present computer applications, a mouse has become an indispensable device. The IP KVM fully supports various models of PS/2 mice manufactured by Logitech, Microsoft and IBM as well as compatible PS/2 mice of other brands. The IP KVM supports the PS/2 keyboard port of code set 1/2/3 and further allows you to use the IP KVM for all kinds of servers, computers or their combination.

IKVM-210-08/IKVM-210-16

- Remote computer control via TCP/IP protocol
- Supports PS/2 and USB compatible mouse/trackball
- Standalone machine controls up to 8/16 computers
- Cascade up to 2 levels, control up to 64/256 computers
- Supports monitor resolution of up to 2048 x 1536
- Computer selection via Port Select Button, Hotkey and On Screen Display (OSD)

Web
Browser



IKVM-210-8M/IKVM-210-16M

- Remote computer control via TCP/IP protocol
- 19-inch 1U rack mountable
- Supports PS/2 and USB compatible mouse/trackball
- Cascade up to 2 levels, control up to 64/256 computers
- Supports high resolution up to 1280 x 1024
- Computer selection via Port Select Button, Hotkey and On Screen Display (OSD)

Web
Browser



KVM-210-8M/KVM-210-16M

- 19-inch 1U rack mountable
- Supports PS/2 and USB compatible mouse/trackball
- Cascade up to 2 levels, control up to 64/256 computers
- Supports high resolution up to 1280 x 1024 (FHD by project optional)
- Computer selection via Port Select Button, Hotkey and On Screen Display (OSD)
- Multiplatform support: Windows 2000/2003/XP/Vista/7/10,11 Linux, Mac, and Sun



KVM-210-08/KVM-210-16

- Supports PS/2 and USB compatible mouse/trackball
- Standalone machine controls up to 8/16 computers
- Cascade up to 2 levels, control up to 64/256 computers
- Supports monitor resolution of up to 2048 x 1536
- Computer selection via Port Select Button, Hotkey and On Screen Display (OSD)
- QVS (Quick View Setting): Quickly select your computer by naming its model or serial number



IP Power Managers

With PLANET IP power management device, users can control and monitor a server room locally or remotely through the Internet. When the ESB is attached, the IPM can check the environmental condition as well; meanwhile, users can monitor the status of special environment for security and safety issue. PLANET IPM series not only monitors and manages the power consumption, but also is an ideal application for your computer power management.

IPM-8221

- 1U rack-mount size design and 8 power outlets that support real-time current image monitoring
- LCD panel displays current, max. alarm, voltage and network information
- Each PDU can supply a maximum load of 3840W with 255 PDUs cascaded
- Enhanced with an environmental sensor to provide a temperature alert via email
- Circuit breaker protection and power usage statistics function
- Power on sequence and the delay time for each socket




IPM-08220

- 0U rack-mount size design and 8 power outlets that support real-time current image monitoring
- LCD panel displays current, max. alarm, voltage and network information
- Up to 255 PDUs can be cascaded
- Versatile sensors supported through environmental sensor inputs
- Circuit breaker protection and power usage statistics function
- Power on sequence and the delay time for each socket




IPM-16230

- 0U rack-mount size design and 16 power outlets that support real-time current image monitoring
- LCD panel displays current, max. alarm, voltage and network information
- Up to 255 PDUs can be cascaded
- Versatile sensors supported through environmental sensor inputs
- Circuit breaker protection and power usage statistics function
- Power on sequence and the delay time for each socket

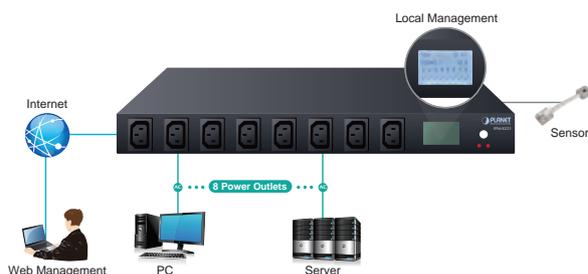

Intelligent Power Management

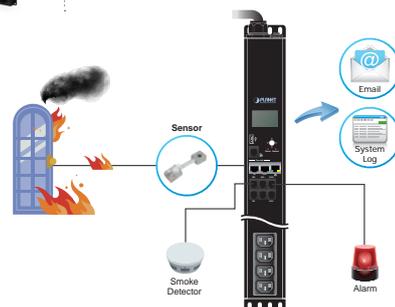

Environmental Sensor Box (ESB)


HDMI/Video Wall over IP Transmitters/Receivers

IHD-420PT/IHD-420PR

- Supports 1080p or 4K (3840 x 2160) HDMI resolution with refreshing 60 frames per second
- Supports IR extension for controlling video source
- Supports RS232 bi-directional remote extension
- Assigns video sources to any monitor of the video wall system
- The selectable 64-channel DIP switch is easily applied for multi-casting group matching
- IEEE 802.3af/at PoE+ function supported; no additional power supply needed



Video Wall

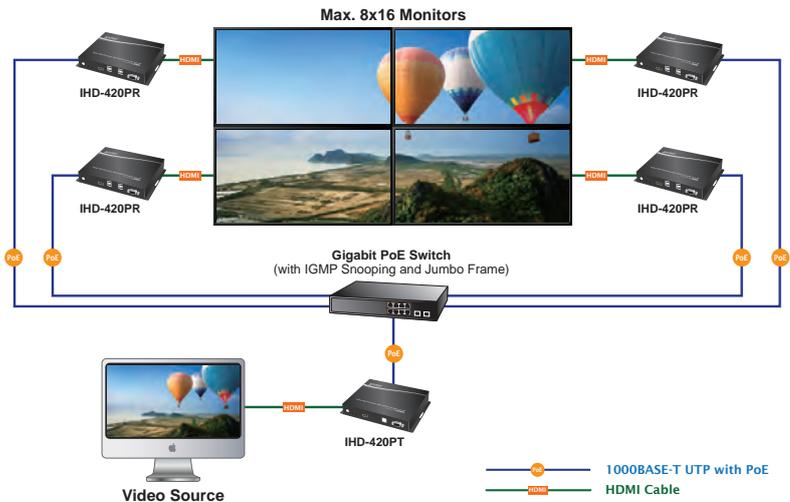

Ethernet Adapters

Model	ENW-9701	ENW-9801	ENW-9803	ENW-2QSFP28	ENW-9720P	ENW-9740P
Product Image						
Attached Interface	PCI Express 2.0	PCI Express 3.0	PCI Express 4.0	PCI Express 4.0	x4 PCI Express v2.1	x4 PCI Express v2.1
Network Interface	1000BASE-X	10G BASE-SR/LR	10G BASE-T, 100/1000/2500/5000/10G Mbps	Dual Port 100GBASE-SR4/LR4	Dual Port 10/100/1000 Mbps	Quad Port 10/100/1000 Mbps
Media Interface	SFP	1 x SFP+	RJ45	2 x QSFP28	RJ45	RJ45
BootROM Socket	-	-	-	-	-	-
Wake on LAN	-	•	•	-	-	-
OS Support	Windows 11	•	•	•	•	•
	Windows 10	•	•	•	•	•
	Windows Server 2025	•	•	•	•	•
	Linux kernel 6.xx	•	•	•	•	•
	VMware ESXi	-	-	-	•	•

Powerline Ethernet Bridges

PLANET provides several types of powerline products to meet various demands on Internet access sharing at home. Users may connect an IP STB to the Powerline Adapter, or connect a PC to the Powerline Adapter in the house freely. With PLANET powerline products applied, no messy network cables and additional switches are required at home and users can entirely enjoy home broadband network from now on.


- HomePlug AV compliant
- IEEE 802.3, IEEE 802.3u, IEEE 1901 and HomePlug AV
- 128-bit AES link encryption for security and reliability
- IGMP snooping for multicast to multiple uni-cast mapping
- Quality of Service (QoS) feature
- Green technology applied
- Up to 16 Power lines
- Easy-to-use utility

PL-104U

- Fully complies with HomePlug Powerline Alliance Specification 1.0
- Data rate of up to 14Mbps within wiring of 60 meters over existing electrical wiring
- Easy to read LED indicators



Home Automation

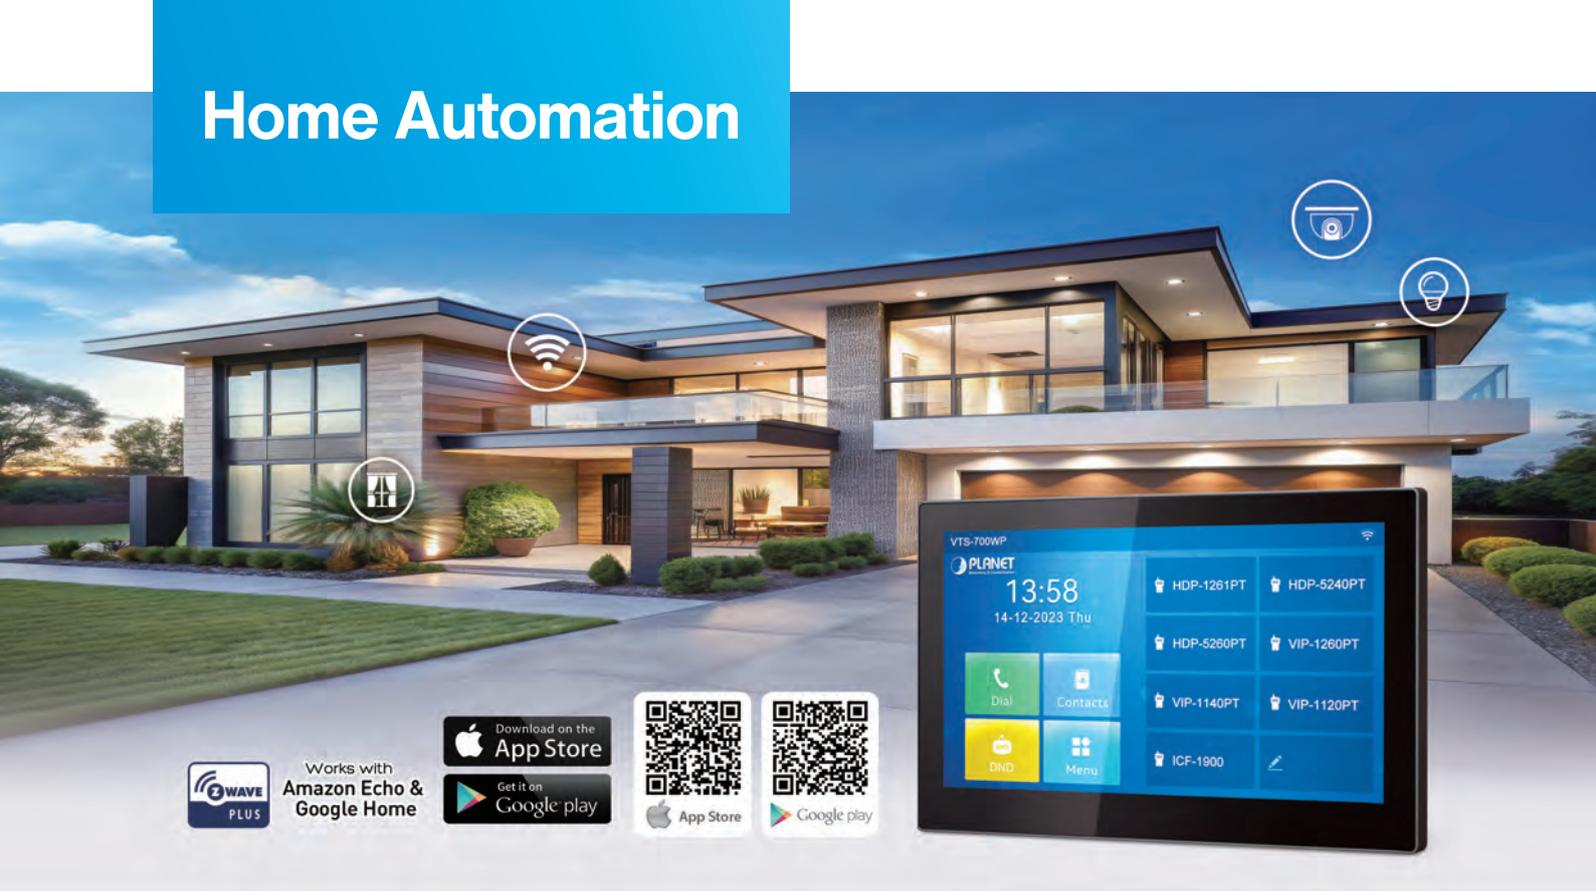

Works with
Amazon Echo &
Google Home



Cloud Home Automation Enjoy a Smart, Safe and User-friendly Lifestyle

PLANET Home Automation system keeps you safe, manages energy consumption, and provides entertainment. The system utilizes a power line and one single network to combine various household facility applications, including camera monitoring, access control, intercom, security, scene control, and value-added services to bring a comfortable, convenient, and happy new life to you.

VTS-700WP

7-inch SIP Indoor Touch Screen PoE Video Intercom with Built-in Wi-Fi

- Stylish 7-inch 1024 x 600 resolution IP Intercom touch screen display
- Powered by PoE or external source
- 8-zone alarm interface available for security control
- Short Circuit Output x 1/Short Circuit Input x 1/RS-485 x1
- Built-in Wi-Fi 2.4G/5G
- Standard SIP protocol compatible with modern IP Intercom systems
- Integrates control gateway and door phone with one control pad
- Real-time image (1080P) monitoring of home and community public cameras



HAC-1000

Z-Wave Home Automation Control Gateway

- Powerful home control and Z-Wave Plus™ certified
- 24-hour emergency monitoring
- Energy and cost saving by pre-defined scene modes
- Ensures entry doors are closed and locked remotely
- App and control pad alerts for any situation
- Z-Wave Frequency: America: 908.42MHz, Europe: 868.42MHz
- Hands-free control with Amazon Alexa



ICF-2000

7" Smart Media Android SIP Conference Phone with Full HD Camera and Touch Screen

- 7-inch color touch screen with Android 9.0 OS
- 5MP camera with 1080p@30fps H.264 video call
- IETE SIP compliant with Transport Layer Security
- Up to 20 SIP lines with 112 one-touch DSS keys
- Dual Gigabit and IEEE 802.3at PoE compliant
- Built-in 2.4G/5GHz Dual-Band Wi-Fi
- Wideband G.722 HD and Opus audio codec with handset and hands-free function



SIP Door Phones

PLANET SIP Door Phone series is the ideal solution for communication in general-purpose outdoor and indoor environments. Its sleek and fast-to-install features are combined with advanced technology. It provides visitor communication monitoring and access control. One glance at the display panel will let you know who is standing outside your door. You start a dialogue or open the door lock. In addition, with PLANET IP PBX or Z-Wave Plus Gateway, you can obtain a comprehensive system for door communication or easy integration into an existing home automation system.

- IETE SIP (RFC 3261), STUN (RFC 3489)
- Power over Ethernet IEEE 802.3af/at
- ONVIF compliant for interoperability
- Auto provisioning, TR069, VPN, VLAN, QoS
- Advanced security protection with SRTP/TLS/HTTPS
- Interoperable with all major IP PBX platforms
- AEC, AJB, BNE, CNG, NR, PLC, VAD
- Audio codecs: G.711 A-law, μ -law, G.722 (wideband), G.723, G.726 and G.729AB

HDP-5261PT

1080p SIP Multi-unit Vandalproof Door Phone with RFID and PoE

- With high protection level of IP66 and IK07, wide temperature range from -40 to 70 degrees C
- Support to open the door with RFID/IC cards, NFC, indoor switch, remote DTMF, Timed open door
- Built in 2M pixels wide-angle camera: 120°(H), 60°(V) with infrared night-vision feature
- 2 SIP identities/accounts for Intercom
- Compatible with Asterisk IP PBX, SIP and ONVIF protocols
- Built-in maximum 128GB capacity TF card slot for image storage
- HD voice speech quality with built-in 2.5W speaker and Acoustic Echo Canceller



HDP-1261PT

1080p SIP Vandalproof Door Phone with RFID and PoE

- With high protection level of IP66 and IK07, wide temperature range from -40 to 70 degrees C
- Support to open the door with RFID/IC cards, NFC, indoor switch, remote DTMF, Timed open door
- Built in 2M pixels wide-angle camera: 120°(H), 60°(V) with infrared night-vision feature
- Compatible with SIP and ONVIF protocols
- Built-in maximum 128GB capacity TF card slot for image storage
- HD voice speech quality with built-in 2.5W speaker and Acoustic Echo Canceller



HDP-5260PT

720p SIP Multi-unit Apartment Vandalproof Door Phone with RFID and PoE

- 720p HD camera with 3 IR LEDs
- Wideband G.722 HD audio
- Anti-vandal solution
- IP65 and IK10 for rigorous environment
- -40 to 70 degrees C operating temperature
- Unlock the door with an RFID, remote DTMF or local password



Z-Wave Plus Sensors

HZS-100

Z-Wave Wall-mount Motion Sensor

- 120-degree motion detection
- Tamperproof protection and report
- Low-power consumption
- Battery capacity detection
- Powerful home control and Z-Wave Plus™ certified
- Z-Wave Frequency: America: 908.42MHz, Europe: 868.42MHz



HZS-300

Z-Wave 4-in-1 Multi Sensor

- Door/Window contact, humidity, temperature and light sensor
- Door and window protection against unauthorized entry
- Tamperproof protection and report
- Low-power consumption and battery capacity detection
- Powerful home control and Z-Wave Plus™ certified
- Z-Wave Frequency: America: 908.42MHz, Europe: 868.42MHz



PLANET Mobile-friendly Feature-rich Online Resources



PLANET Global Website

PLANET global website that features an innovative and rich product knowledge database with more user-friendly interfaces. Here you can find:

- Product introduction, download resources, and related products
- Latest corporate and products news
- PLANET eTV Channel for various videos
- Product solutions and applications
- Download center -- FAQs, support resources
- Product selectors and product tools



Mobile-friendly & Responsive Website Design

In Partner Area, we provide registered partners with up-to-date information and useful marketing tools that help you sell PLANET products and solutions for expanding your revenue opportunities:

- Support and Downloads include photos, EC declaration, emulators, sales guides, datasheets, drivers, etc.
- Marketing Tools cover a wide variety of product catalogues and corporate brand tools.
- Case studies on successful reference sites are shared among our worldwide partners.

PLANET Facebook Fan Page

<http://www.facebook.com/PLANETTechnology>

PLANET Facebook Fan Page is delivered to facilitate better exchange of information and interaction with our global customers. On our page, you can:

- Hear the latest news on PLANET
- Get the updated PLANET product information
- Share your experience with PLANET



PLANET YouTube Channel

<http://www.youtube.com/user/PLANETTechnology>

Aiming to provide user-friendly and feature-rich multimedia contents, PLANET provides a wide variety of the following videos on YouTube Channel:

- Corporate Introduction
- Product Solutions
- Product Demo
- Webinars
- IP Surveillance Live Clips
- Exhibition Highlights



PLANET LinkedIn Company Page

<https://tw.linkedin.com/company/planet-technology-hq>

Connect with us on LinkedIn. Here you'll find various useful information for you and your company.

- New technology sharing
- Latest product launches
- Solution video announcements
- News and events releases



Easy & Free PLANET DDNS Service

<http://www.planetdns.com/>

PLANET DDNS website provides a variety of products, such as PLANET IP Cameras, Router, and NAS, to support FREE Dynamic IP domain name service. Once the users register a simple and easy-to-remember domain name for your product in PLANET DDNS website, you can access and manage your devices anytime, anywhere.





Shaping Smart Networking

PLANET Wins the 2026 Taiwan Excellence Award



Renewable Energy 10G 95W PoE++ Managed Switch



Industrial Vehicle 5G NR Cellular Wireless Gateway



Industrial Flat-type 95W PoE++ Managed Switch with LCD Touch Screen

Worldwide Recognitions



Product Line Index

A		GSD-1002M		15	IGS-4215-8T4X/IGS-4215-16T4X/		21	IVR-300/IVR-300W/IVR-300FP		101	SW-504		17
AIS-1000	91	GSD-1008HP	55	IGS-4215-24T4X	25	IXT-705AT	32	T			TSN-5225-6T2C/	20	
ANT-FP14AD	88	GSD-1022UP	55	IGS-4215-8UP4X	25	IXT-705AT	69	TSN-5225-4T25/TSN-5225-4T	20		TSN-6325-8T454X	20	
ANT-FP18	88	GSD-1222VHP	53	IGS-5007/IGS-500T-E/	22	IXT-815AT	69	U			UNC-NMS	4	
ANT-FP18A	88	GSD-2022P	55	IGS-5107F/IGS-501T	26	IXT-815AT	32	UNC-NMS	81		UPOE-1600G	56	
ANT-OM10A	88	GSD-503/GSD-803	17	IGS-504PT/IGS-504HPT/IGS-514PT	26	IXT-900-1X1T	31	UPOE-1600XG	56		UPOE-2400G	56	
ANT-OM15	88	GSD-604HP	55	IGS-5225-16T4S/IGSW-24040T	20	IXT-900-1X1UP	32	UPOE-2400XG	56		UPOE-400	57	
ANT-OMSD-KIT	88	GSD-805	17	IGS-5225-4P2S	25	IXT-900-2X1UP	68	UPOE-800G	56		UPOE-800XG	56	
ANT-OM8	88	GSD-908HP	55	IGS-5225-4T2S	21	IXVR-800 Series	101	V			VC-231	72	
ANT-SE17AD	88	GST-802	66	IGS-5225-4UP1T2S/	25	K					VC-231G	78	
AVS-4210-24HP4X	16	GST-802S	66	IGS-5225-4UP1T2S-12V	25	KVM-210-08/KVM-210-16	105	VC-231G/VC-231GP	72		VC-231G/VC-231GP	78	
AVS-4210-8HP2X	16	GST-805A	66	IGS-5225-8P2S2X	24	KVM-210-8M/KVM-210-16M	105	VC-231GF	72		VC-232G	78	
AVS-4210-8HP2X	50	GST-806A15	66	IGS-5225-8P2T2S	24	L		VC-232G	78		VC-232G	78	
B		GST-806A60	66	IGS-5225-8P4S/IGS-5225-8P2T4S	24	LCG-300/LCG-300W	40	VC-232G	72		VC-234	78	
BSP-115HP-5A/BSP-115PV-15A	29	GST-806B15	66	IGS-5225-8T2S2X	25	LCG-300-NR	40	VC-234G	78		VC-234G/VC-234GT	72	
BSP-360	29	GST-806B60	66	IGS-5225-8T4S-12V	25	LCG-350W-NR	26	VC-234G/VC-234GT	78		VCG-1500WG-LTE	34	
BSP-4215-6P2T2X	29	GST-806815	66	IGS-5227-6MT-X	27	LN1130	41	VCG-1500WG-LTE	88		VCG-2406WP-NR	33	
C		GST-806860	66	IGS-5227-6T	27	LN1140	41	VCG-2406WP-NR	87		VCG-2406WP-NR	103	
CAM-AHD425	93	GSW-1601	17	IGS-5227-6MT-X	27	LN1502	41	VF-101G-KIT	74		VF-102G-KIT	74	
CS6-16PON4C4S	77	GSW-1820HP	55	IGS-5227-6T	27	LRP-101CE	62	VF-106G-KIT	74		VF-402-KIT	74	
CS-6303R	9	GSW-1820VHP/GSW-2620VHP	53	IGS-5227X-4P2T	27	LRP-101CH	62	VGW-1620FS	99		VGW-2420FS	99	
CS-6306R	9	GSW-2401	17	IGS-604HPT-M12/IGS-604HPT-RJ	27	LRP-101CH	62	VGW-3220FS	99		VGW-420FO	99	
CS6-516X	9	GSW-2620HP	55	IGS-624HPT/IGS-614HPT	26	LRP-101UE	62	VGW-420FS	99		VGW-820FS	99	
CS6-524S8X	9	GSW-5240HP	55	IGS-6325-16P4S	24	LRP-101UH	62	VIP-1140PT	97		VIP-1260PT	97	
CS6-524T24S	9	GT-1205A	70	IGS-6325-16T4X	21	LRP-111UH	62	VIP-462DG	99		VR-100	101	
CS6-524T8X	9	GT-802/GT-802S	70	IGS-6325-16T4X	21	LRP-1622CS	62	VR-300 series	82		VR-300 Series	101	
CS6-548S	9	GT-805A	70	IGS-6325-20T4C4X	20	LRP-1622CS	62	VR-300 Series	101		VR-300F/VR-300FP	102	
CS6-548T	9	GT-805A-PD	70	IGS-6325-24P4X	23	LRP-1622CS	62	VR-300FW-NR	87		VR-300FW-NR	102	
CS6-54Q	9	GT-806A15/GT-806B15	70	IGS-6325-24P4X	23	LRP-1622CS	62	VTS-700WP	97		W		
D		GT-806A60/GT-806B60	70	IGS-6325-24UP4X	23	LRP-1622CS	62	WBS-512AC	86		WBS-900AC	86	
DCS-7342-24X6C	8	GT-915A	70	IGS-6325-24UP4X	23	LRP-1622CS	62	WDAP-3600AX	86		WDAP-3600BE	86	
DCS-7342-32C	8	GTP-805A	59	IGS-6325-4T2X	20	LRP-1622CS	62	WDAP-5100BE	86		WDAP-5100BE	86	
DCS-7342-48Y8C	8	GUP-805A-60W	71	IGS-6325-4UP2X	24	LRP-1622CS	62	WDAP-C3000AX	84		WDAP-C3000AX	84	
E		GUP-805A-60W/GUP-805A-95W	58	IGS-6325-5X1T	20	LRP-1622CS	62	WDAP-C5100BE	83		WDAP-W3600BE	83	
ENW-2QSFP28	106	GUP-805A-95W	71	IGS-6325-8T85X/IGS-6325-8T85/	21	LRP-1622CS	62	WDAP-W3000AX	84		WGS-4215-16P2S	28	
ENW-9701	106	H		IGS-6325-8T4X	24	LS100-DR	41	WGS-4215-16P2S	54		WGS-4215-8HP2S/WGS-4215-8P2S	28	
ENW-9720P	106	HAC-1000	107	IGS-6325-8UP2S/IGS-6325-8UP2S2X	24	LS100-PIR	41	WGS-4215-8HP2X/WGS-4215-8HP2XV	54		WGS-4215-8P2X/WGS-4215-8P2XV	54	
ENW-9740P	106	HDP-1261PT	108	IGS-6329-8UP2S2X/	23	LS100-WL	41	WGS-4215-8T2S/WGS-4215-8T2X	28		WGS-4215-8T2S/WGS-4215-8T2X	28	
ENW-9801	106	HDP-1261PT	108	IGS-6329-8UP2S4X	23	LS200-CM3	42	WGS-4215-8T2XV	54		WGS-4215-8T2XV	54	
ENW-9803	106	HDP-5260PT	108	IGS-800T/IGS-801T	22	LS200-LG	42	WGS-4215-8T2XV	54		WGS-4215-8T2XV	54	
EPL-SPT-8/EPL-SPT-32/EPL-SPT-64	77	HDP-5260PT	108	IGS-800T-PN/IGS-820TF-PN	22	LS200-MF8	42	WGS-4215-8T2S	29		WGS-4215-8T2S	29	
F		HDP-5261PT	98	IGS-801M	21	LS200-PM25	42	WGS-5215-16UP4X/	54		WGS-5215-16UP4XV	28	
FGSD-1022VHP	53	HDP-5261PT	108	IGS-820TF	22	LS200-PT	41	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FGSD-1821P/FGSW-2511P	55	HLB-100	42	IGS-824UP	26	LS200-RF	41	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FGSW-1816HPS	52	HLB-100	84	IGS-R4215-24P4X	24	LS200-TC	41	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FGSW-1822VHP/FGSW-2622VHP	53	HLB-1150	37	IGS-R4215-24T4X	32	LS200-TH	41	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FGSW-2624HPS	52	HLB-1150	42	IGT-1205AT	22	LS200-VOC	42	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FSD-1011HP	55	HLB-1150	84	IGT-1205AT/IGT-2205AT/IGT-2205AT-E	22	LS250-PLUG	42	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FSD-503/FSD-803	17	HPOE-1200G	57	IGT-2205AT/IGT-2205AT-E	32	M		WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FSD-604HP/FSD-1008HP	55	HPOE-2400G	57	IGT-805AT	32	MC-1500	67	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FST-801	66	HPOE-460	57	IGT-815AT	32	MC-1500R	67	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FST-802	66	HZS-100	108	IGT-900-1T1S	32	MC-1500R48	67	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FST-802S15	66	HZS-300	108	IGTP-2205AT	31	MC-1610MR	65	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FST-802S35	66	I		IGTP-2205AT	59	MC-1610MR48	65	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FST-802S50	66	IAP-1800AX/IAP-2400AX	83	IGTP-802T/IGTP-802TS	31	MC-700	65	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FST-806A20	66	IAP-3600BE/IAP-3600BE-4PF	83	IGTP-805AT/IGTP-802T/	59	MG-110	74	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FST-806B20	66	ICA-3880	92	IGTP-802TS/IGTP-815AT	59	MG-115A	74	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FT-801	71	ICA-4880	92	IGTP-805AT/IGTP-815AT	31	MG-120	74	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FT-802	71	ICA-HM620	93	IGUP-1205AT/IGUP-2205AT	31	MGS-6311-10T2X	13	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FT-802S15	71	ICA-M3580P	92	IGUP-805AT	31	MGS-6311-24UPL6X	13	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FT-802S35/FT-802S50	71	ICA-M4580P	92	IGUP-805AT/IGUP-1205AT/	58	MGS-6311-24UPL6X	13	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FT-806A20/FT-806B20	71	ICA-W7100	93	IGUP-2205AT	58	MGS-6311-8P2X	49	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FT-806A60/FT-806B60	71	ICA-W8100	93	IHD-420PT/IHD-420PR	106	MGS-6311-8P2X/MGS-6311-8UP4X	49	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FTP-802/802S15	60	ICF-2000	107	KVM-210-08/KVM-210-16	105	MGS-6320-2T6S2X	13	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FWA-2100-NR	33	ICG-2210W-NR	33	KVM-210-8M/KVM-210-16M	105	MGS-6320-8T2X	13	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FWA-2100-NR	87	ICG-2210W-NR	87	IMG-2100T/IMG-2105AT/	38	MGS-910XP	55	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
FWA-2100-NR	103	ICG-2210W-NR	102	IMG-2102T/IMG-2102TS	38	MGS-10080F	12	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
G		ICG-2510WG-LTE	34	IMG-2200T / IMG-2400T	38	MGSW-24160F	12	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
GPL-8000	77	ICG-2510WG-LTE	102	IMG-3100T/IMG-3105AT	38	MGSW-28240F	12	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
GNP-100	77	ICG-2510W-LTE	34	IMG-3200T/IMG-3400T	38	N		WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
GNP-400AXV	77	ICG-2510W-LTE/ICG-2510WG-LTE	88	IMS-6325-5	20	NMS-1000V-12	4	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
GNP-SFP	77	ICG-2515-NR	82	IPM-08220	105	NMS-1000V-12	81	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
GS-2210-8P2S/IGS-2210-16P2S/	17	ICG-2515-NR/ICG-2515F-NR	33	IPM-16230	105	NMS-360	5	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
GS-2210-24P2S	17	ICG-2515-NR/ICG-2515F-NR	87	IPM-8221	105	NMS-360V-12	5	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
GS-2210-8P2S/IGS-2210-16P2S/	52	ICG-2515-NR/ICG-2515F-NR	102	IPOE-162	30	NMS-500	4	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
GS-2210-24P2S	52	ICG-2515W-NR	82	IPOE-162S	59	NMS-500	81	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
GS-2210-8T2S/IGS-2210-16T2S/	17	ICG-2515W-NR/ICG-2515FW-NR	33	IPOE-162S	59	NMS-500	40	WGS-5215-16UP4XV	28		WGS-5215-16UP4XV	28	
GS-2210-24T2S	17	ICG-2515W-NR/ICG-2515FW-NR	87	IPOE-162S	59	NMS-500	40	WGS-52					



www.planet.com.tw

PLANET Technology Corporation

11F., No. 96, Minquan Rd., Xindian Dist., New Taipei City 231, Taiwan (R.O.C)

TEL: +886-2-2219-9518 FAX: +886-2-2219-9528 E-mail: sales@planet.com.tw

PLANET reserves the right to change specification without notice. All brand names and trademarks are property of their respective owners.

© PLANET Technology Corporation C-0126-EP